

Bare-Metal Seam Sealer

PN 08310

Superior Corrosion Protection

- Heavy-bodied seam sealer for use on vertical or horizontal seams to match OEM Sealers
- Non-sagging, non-flowing and excellent tooling
- Fast cure-through
- Paintable in 15 minutes for increased production
- Apply directly over bare or primed metal - matched OEM seams
- Flexible over a wide range of temperatures
- No shrinkage, cracking or out gassing
- Work time = 8 minutes
- Paintable = 15 minutes



PN	Description	Size	Items/Case
08310	3M™ Automix™ Bare-Metal Seam Sealer	200mL	6
08200	3M™ Automix™ OEM Seam Sealer Tip Kit		6



Tough Test Conditions...

Constant salt spray exposure of 500, 1000 & 1500 hours.

- Applied over bare galvanized metal
- Tested successfully against competitors
- Superior corrosion resistance under extreme conditions

Warranty and Limited Remedy: 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS, INCLUDING ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If the 3M product does not conform to this warranty, the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price. Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted.

3M

**Automotive
Aftermarket Division**
3M Center
Building 223-6N-01
St. Paul, MN 55144-1000
U.S.A.
www.3M.com/automotive


Please recycle. Printed in U.S.A.
3M is a trademark of 3M.
© 3M 2008. All rights reserved.
60-4401-0283-2



AFTER 500 HOURS



AFTER 1000 HOURS

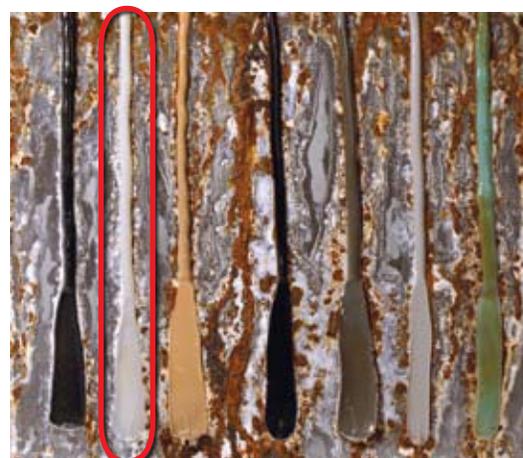

AFTER 1500 HOURS