

Key Features & Benefits:

- Installation
 - All in one junction box enables extremely quick installation
 - Can accept BX cable (metal clad wiring) or NM (Romex) wiring
 - Strong spring clips to secure housing to drywall, ceiling tiles and downlight mounting plate
- Ratings
 - Acceptable for use in IC or Non-IC applications
 - ETL wet location listed
 - Energy Star listed
- Construction
 - Recessed bevel with frosted lens for smooth, even and optimal light distribution
 - Cast aluminum housing and trim
 - 90+ CRI
- Electrical
 - Dimmable to 10% (120V) Triac
 - Rated life > 50,000 hrs
- Options
 - 4, 5/6, and 8 inch can replacements available
 - Round and square trim kits available
 - External emergency back-up available (ESL-EMG-AC-18W)



Project:

Date:

Catalog #:

Notes:



IC RATED



Accepts BX (Metallic)



Accepts NM (Romex) Wiring

**Technical Specifications:**


Power: 10 Watts
Input Voltage: 120 VAC
Power Factor: >0.98
CRI: 90+
Lumens: Up to 660 Lumens
Input Frequency: 50/60Hz
Operating Temperature: -13°F to 114°F (-25°C to 45°C)
Control: Triac dimmable at 120V to 10%

Catalog Data:

| ITEM # | WATTS | LUMEN OUTPUT | EFFICACY (lm/W) | KELVIN | CRI | ENERGY STAR CERTIFIED |
|---------------------|-------|--------------|-----------------|--------|-----|-----------------------|
| ESL-CCR-S56-10W-130 | 10W | 620 | 62 | 3000K | 90+ | ✓ |
| ESL-CCR-S56-10W-135 | 10W | 620 | 62 | 3500K | 90+ | ✓ |
| ESL-CCR-S56-10W-140 | 10W | 640 | 64 | 4000K | 90+ | ✓ |
| ESL-CCR-S56-10W-150 | 10W | 660 | 66 | 5000K | 90+ | ✓ |

Ordering Guide:

Example Part Number: ESL-CCR-S56-10W-130

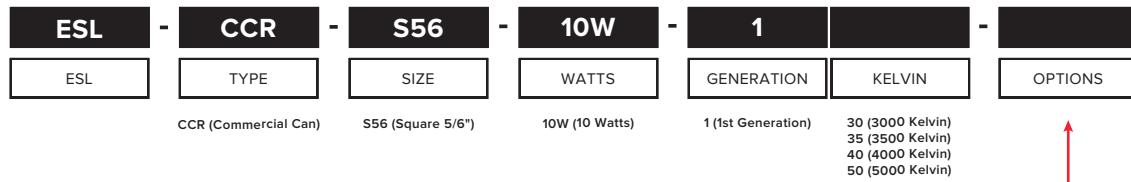

Dimensions:

