



SPECIFICATION SHEET

161-2-18

CLASS
2

NOVAX[®] CLASS 2 RUBBER INSULATING GLOVE WITH BELL CUFF - 18"

- Meet ANSI/ASTM D120 standard and NFPA 70E for use around electrical hazards and arc flash protection
- Contoured shape reduces hand fatigue
- Bell cuff increases mobility and comfort
- Natural rubber construction offers the required dielectric properties combined with flexibility, strength and durability
- Silicone Free

APPLICATIONS

- Power generation
- Electrical contractors
- Hybrid automotive repair/service/manufacturing
- Industrial plant maintenance
- Utilities

TECHNICAL DATA

MATERIAL	Natural Rubber
COLOR	Black / Red
CUFF STYLE	Bell cuff, Rolled beaded
SIZES	8 - 12
PACKAGING	1 pair per bag/box, 12 pair per case
CASE	21.8" x 8.7" x 3.8" / 55.3cm x 22.1cm x 9.7cm
CASE WEIGHT	35.3 lbs / 16.0 kg
COO	Malaysia

MAX USE VOLTAGE

CLASS	AC V RMS	DC V
2	17,000	25,500

10

NOVAX[™] by G.B. INDUSTRIES
ANSI / ASTM D120
CLASS 2 MADE IN MALAYSIA TYPE I
MAX USE VOLT 17000V AC


BARCODES

ITEM	PAIR	DOZEN	CASE
■ 161-2-18/8	616314121173	---	02616314121171
■ 161-2-18/9	616314121180	---	02616314121188
■ 161-2-18/10	616314121142	---	02616314121140
■ 161-2-18/11	616314121159	---	02616314121157
■ 161-2-18/12	616314121166	---	02616314121164



DIMENSIONS (in/cm)

	8	9	10	11	12
A	18.1 / 46.0	18.1 / 46.0	18.1 / 46.0	18.1 / 46.0	18.1 / 46.0
B	3.9 / 10	4.1 / 10.5	4.7 / 12	5.3 / 13.5	5.9 / 15

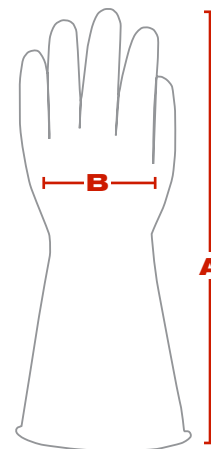

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU[®]

968 Albany Shaker Road | Latham, NY 12110 | 800-262-5755 | 518-861-0133 | Fax: 518-861-0144 | sales@pipusa.com | www.pipusa.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.