

THE AMERICAN DRILL COMPANY

RMTTM

ROCKY MOUNTAIN TWIST



HIGH PERFORMANCE

**INDUSTRIAL
CUTTING TOOLS**

*Montana Built.
Industry Proven.*



RAM

MONTANA



RMT™



Rocky Mountain Twist's

mission is to be THE premier U.S. manufacturer of industrial quality cutting tools and power tool accessories through the utilization of state-of-the-art technology, innovation, and a workforce committed to excellence.

Dedicated to the community and it's employee's, RMT strives to keep the spirit of "American Made" alive and strong.

AMERICAN PRIDE

BUILT IN BIG SKY COUNTRY



OUR ROOTS IN THE ROCKIES

Rocky Mountain Twist (RMT) was born in the heart of Montana, where bold landscapes inspire bold ideas. Since the 1990's, RMT has led the nation in high-performance precision cutting tools. Complementing our cutting tools is a full line of power tool accessories – driver bits, nut setters, and more – manufactured with the same commitment to quality and performance.

Our 300,000 sq. ft. facility in Ronan sits at the foot of the Rockies—an area known for adventure and now, exceptional industrial tooling. The rugged terrain surrounding us reflects the strength, precision, and reliability we build into every tool.

From Ronan to the world, we craft performance with purpose.



TRUE QUALITY. TRUSTED PERFORMANCE

In today's fast-paced manufacturing world, you need more than just a supplier—you need a partner who understands your goals and challenges. At RMT, we're committed to delivering cutting tools that meet your exact specifications and exceed expectations. Our approach is rooted in collaboration, reliability, and a deep understanding of the demands of modern machining.

What sets RMT apart is our team of in-house engineers who work directly with production to uphold the highest standards of quality and performance. Their expertise drives innovation, ensures consistency, and allows us to respond quickly to customer needs. From design to delivery, our engineering team plays a hands-on role in crafting tools that perform reliably in the most demanding environments.

With decades of experience in the cutting tool industry, we know what it takes to support your operations. Depend on RMT for professional service, responsive technical support, and a true manufacturing partnership. When you choose RMT, you're choosing trusted performance, engineered precision, and a team that's invested in your success.

COATING CAPABILITIES

In addition to manufacturing high-performance drill bits, our facility is equipped to apply precision coatings that enhance tool durability, reduce friction, and improve cutting efficiency. Our in-house coating technology supports a variety of applications, ensuring consistent quality and performance across every product.




RMT Proprietary CNC
Drill Grinding Cell


PERFECTING THE TECHNOLOGY

Maintaining extreme tolerances and consistent quality doesn't happen by chance. Utilizing innovative, advanced manufacturing technology is a universal rule at RMT. Our proprietary state-of-the-art CNC drill grinding cells transform high-speed steel blanks into precision, high performance cutting tools. This revolutionary process ensures exact specifications and superior quality that surpasses National Aerospace Standards.

ANATOMY OF A DRILL BIT

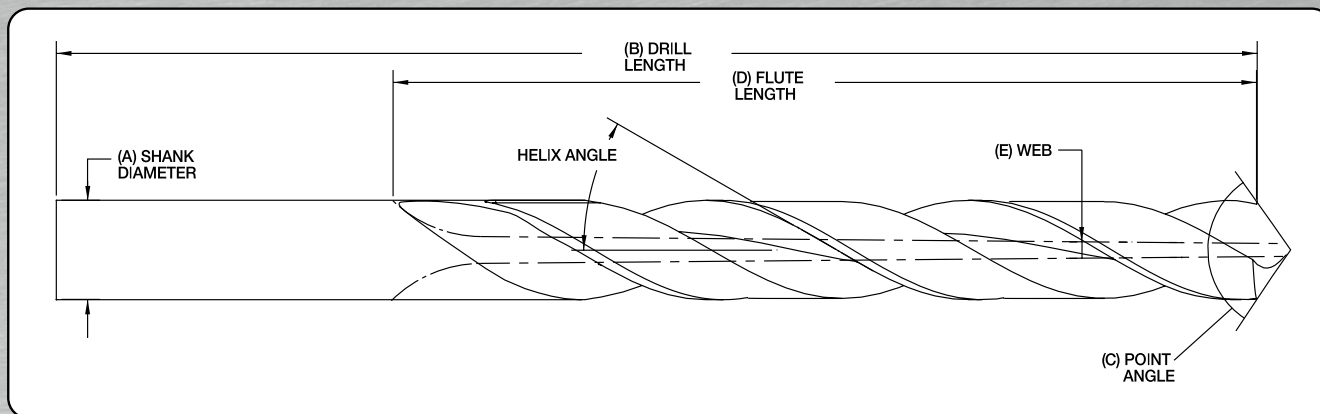

- (A) **SHANK DIAMETER** - Drill bit diameter at shank end. Also includes 3/8" reduction diameter.
- (B) **DRILL LENGTH** - The length of the drill bit from shank end surface to the shoulder of the point. (measured at the outer diameter)
- (C) **POINT ANGLE** - The angle included between the cutting lips projected on a plain parallel to the cutting axis and parallel to the cutting lips. In form, this angle resembles a cone, but it departs from a true cone to furnish clearance behind the cutting lips.
- (D) **FLUTE LENGTH** - Length of helical flute measured from outer edge of cutting lip to back lead out edge of the flute.
- (E) **WEB** - The central portion of the body that joins the lands. Extreme end of the web forms the chisel edge on a 2 flute drill bit.

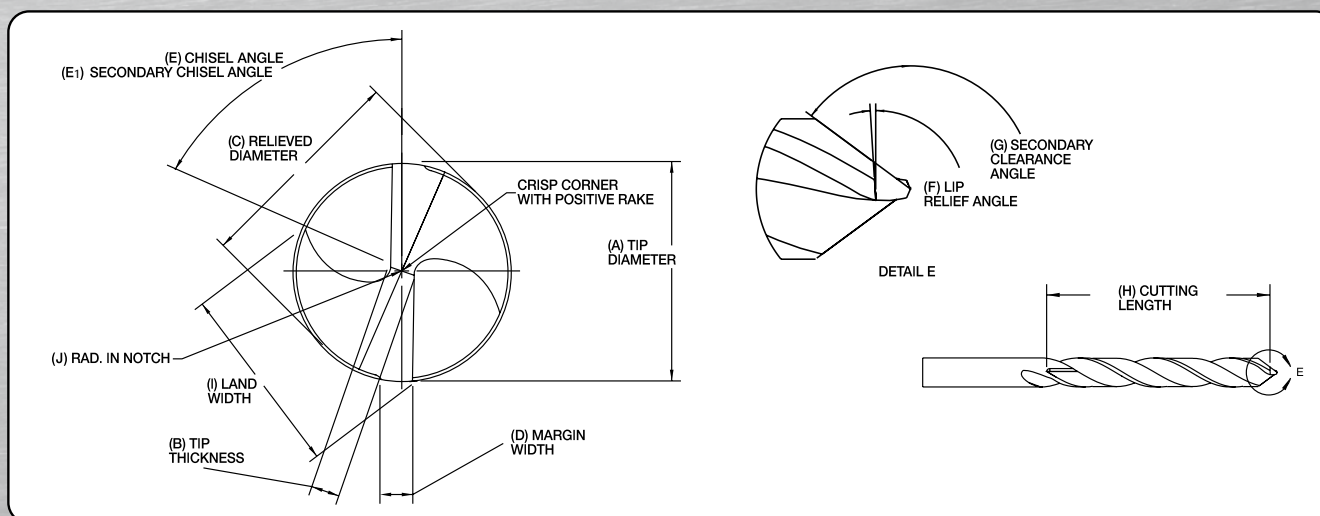

- (A) **TIP DIAMETER** - Drill bit diameter at the tip.
- (B) **TIP THICKNESS** - Thickness of the web at the point (unless another specific location is indicated).
- (C) **RELIEVED DIAMETER** - Resulting diameter of the drill bit body that has been cut away to minimize friction from the hole.
- (D) **MARGIN WIDTH** - The portion of the land width that is unaffected by the relieved diameter grind. Located adjacent to the leading edge.
- (E) **CHISEL ANGLE** - Included angle between the chisel edge and the leading edge of the cutting lip, as viewed from the front end of the drill.
- (E₁) **SECONDARY CHISEL ANGLE** - Included angle formed by the intersection of the cutting edge and the face of the notch with the relief surface of the point, resulting in partial removal of the primary chisel edge (applies to split point geometry only).
- (F) **LIP RELIEF ANGLE** - The clearance angle of the cutting lips. Measured by projection onto a plane tangent to the periphery at the outer corner of the lip. The lip relief angle is usually measured across the margins of a twist drill.
- (G) **SECONDARY CLEARANCE ANGLE** - The included angle generated from the clearance operation for the secondary cutting edge.
- (H) **CUTTING LENGTH** - Length of relieved diameter measured from the outer edge of cutting lip to back lead out edge of the relieved diameter grind.
- (I) **LAND WIDTH** - Peripheral portion of the body between adjacent flutes.
- (J) **RADIUS IN NOTCH** - Radius at the intersection of the secondary chisel, and the split depth line.

COATINGS & FINISHES




ALTiN

Aluminum Titanium Nitride

- Working temperatures up to 900°C (1650°F)
- Works well with harder materials
- Not suited for Aluminum
- Excellent for wet drilling in tougher materials
- Improved life in interrupted cuts over TiAlN

MATERIAL APPLICATION

ALLOY STEELS, STAINLESS STEELS, CAST IRON, TITANIUM, NICKEL SUPERALLOYS, AND OTHER AEROSPACE MATERIALS

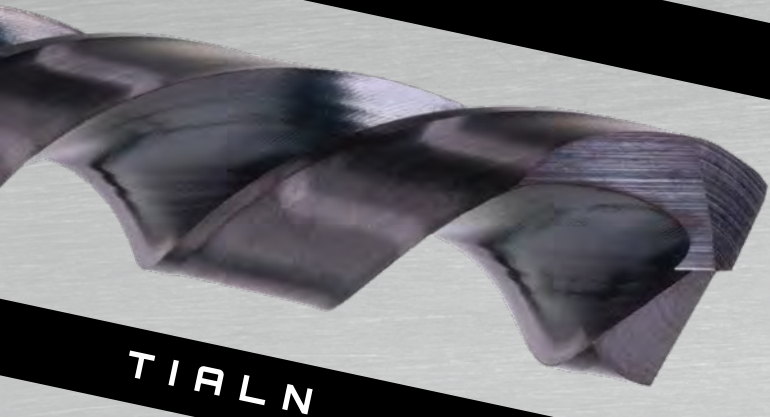

TiAlN

Titanium Aluminum Nitride

- Working temperatures up to 800°C (1450°F)
- Heat resistance allows for faster feeds and speeds
- Not suitable for aluminum
- Higher performing than TiN and AlTiN
- Dark metallic gray or violet in appearance

MATERIAL APPLICATION

STEEL, STAINLESS STEEL, TITANIUM, NICKEL SUPERALLOYS




TiCN

Titanium Carbonitride

- More abrasion resistant and harder than TiN
- Highest lubricity of the PVD coatings improving chip flow and lowering heat generation
- Better wear characteristics than TiN in cooled applications
- Best option for aluminum
- Working temperatures up to 400°C (750°)

MATERIAL APPLICATION

CAST IRON, STAINLESS STEEL, ALUMINUM, FERROUS METALS, COMPOSITES

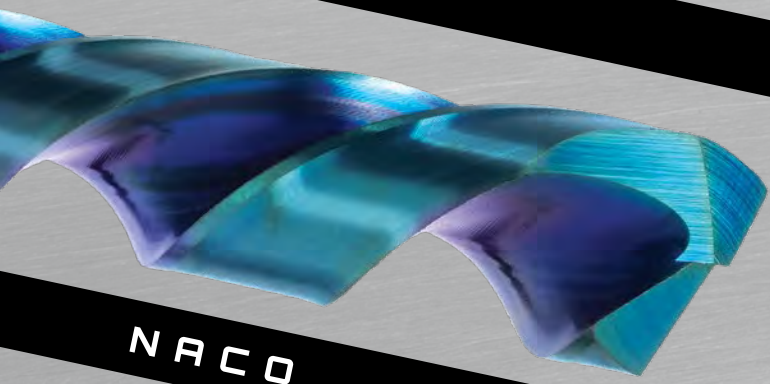


NACO

Nano Composit

- Extremely hard for excellent tool life, even without coolant
- Excels in drilling hardened and tough materials
- Working temperatures up to 1200°C (2100°F)
- Lower friction coefficient than TiAlN or AlTiN
- Not suitable for Aluminum

MATERIAL APPLICATION

PRE-HARD ALLOY STEELS, TITANIUM, NICKEL SUPERALLOYS, STAINLESS STEELS, CAST IRON

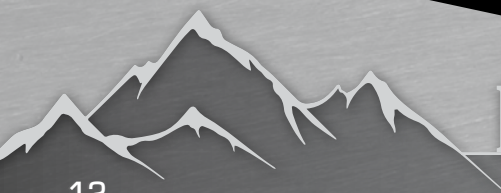

RMT

COATINGS & FINISHES

COBALT

Bronze Oxide for Cobalt identification

- Bronze oxide surface finish for easy visual identification
- Cobalt steel through and through
- Higher heat and corrosion resistance
- For drilling in tough and harder materials
- Further enhanced by coatings such as TiAlN or nACo

MATERIAL APPLICATION

ALLOY STEELS, STAINLESS STEELS, CAST IRON, TITANIUM, NICKEL SUPERALLOYS, AND OTHER AEROSPACE MATERIALS




BLACKGOLD

Black Oxide + Bronze Oxide

- Two tone color scheme identifies specific RMT geometry package with 137° split point or the 135° Parabolic
- More corrosion resistant than bright drills
- Black oxide finish on margin contacts for improved performance
- Clearly identifiable color scheme for easy selection

MATERIAL APPLICATION

COMMON FERROUS AND NON-FERROUS METALS, PLASTICS, WOOD

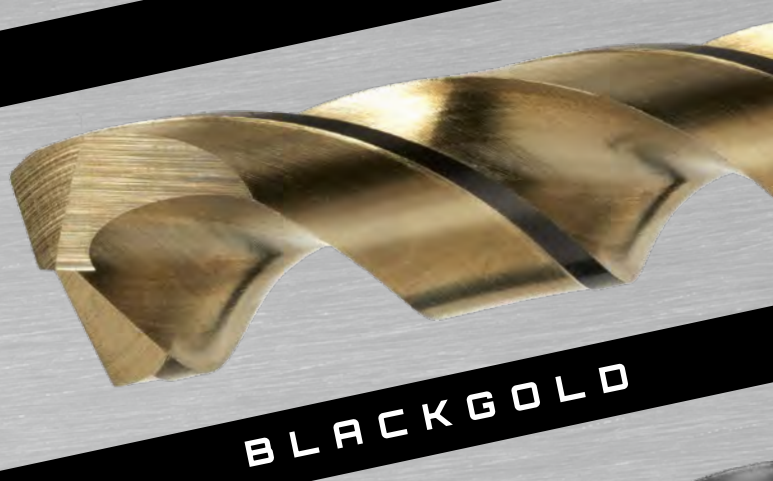

BLACK OXIDE

Surface Treatment

- True surface transformation, not a coating
- Immersion process seals any open grain or pores in the material
- Finish porosity retains oil better than bright drills
- Great low-cost performance improvement

MATERIAL APPLICATION

STEEL, COPPER, ALUMINUM, BRASS, WOOD, PLASTICS




TIN

Titanium Nitride

- Original low friction surface coating
- Improved surface hardness
- Working temperatures up to 600°C (1100°F)
- Great general purpose coating
- Metallic gold appearance

MATERIAL APPLICATION

WOOD, PLASTIC, COMMON FERROUS AND NON-FERROUS METALS

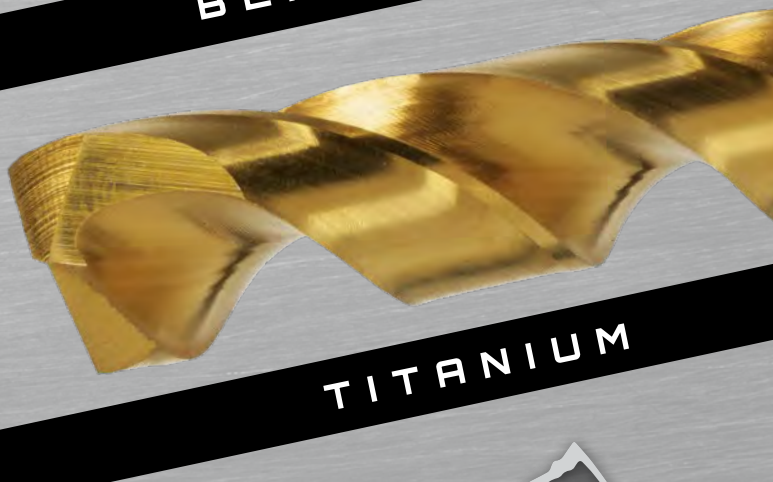

THE AMERICAN DRILL COMPANY

RMTTM

ROCKY MOUNTAIN TWIST



HIGH PERFORMANCE
**AEROSPACE
CUTTING TOOLS**

*MONTANA
MADE -
BUILT TO
PERFORM,
FUELED BY
TECHNOLOGY*

AIRCRAFT EXTENSION

Bright 6" 135°

MADE IN USA



- Industrial-Grade NAS High Speed Steel (HSS) constructed for superior strength and run-out characteristics
- Mid length extension for deep holes in confined working conditions
- Split Point penetrates on contact and prevents "walking" of the bit
- NAS 907 Compliant
- One piece construction



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Plastic
- Wood
- Low-Alloy Steel

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/8	0.1250	1-5/8"	6"	95002100	12
9/64	0.1406	1-3/4"	6"	95002101	12
5/32	0.1562	2"	6"	95002102	12
11/64	0.1719	2-1/8"	6"	95002103	12
3/16	0.1875	2-5/16"	6"	95002104	12
13/64	0.2031	2-7/16"	6"	95002105	12
7/32	0.2188	2-1/2"	6"	95002106	12
15/64	0.2344	2-5/8"	6"	95002107	12
1/4	0.2500	2-3/4"	6"	95002108	12
17/64	0.2656	2-7/8"	6"	95002109	12
9/32	0.2812	2-15/16"	6"	95002110	12
19/64	0.2969	3-1/16"	6"	95002111	12
5/16	0.3125	3-3/16"	6"	95002112	6
21/64	0.3281	3-5/16"	6"	95002113	6
11/32	0.3438	3-7/16"	6"	95002114	6
23/64	0.3594	3-1/2"	6"	95002115	6
3/8	0.3750	3-5/8"	6"	95002116	6
25/64	0.3906	3-3/4"	6"	95002117	6
13/32	0.4062	3-7/8"	6"	95002118	6
27/64	0.4219	3-15/16"	6"	95002119	6
7/16	0.4375	4-1/16"	6"	95002120	6
29/64	0.4531	4-3/16"	6"	95002121	6
15/32	0.4688	4-5/16"	6"	95002122	6
31/64	0.4844	4-3/8"	6"	95002123	6
1/2	0.5000	4-1/2"	6"	95002124	6

AEROSPACE

AIRCRAFT EXTENSION

Bright 6" 135°

MADE IN USA



- Industrial-Grade NAS High Speed Steel (HSS) constructed for superior strength and run-out characteristics
- Mid length extension for deep holes in confined working conditions
- Split Point penetrates on contact and prevents "walking" of the bit
- NAS 907 Compliant
- One piece construction



MATERIAL APPLICATION


- Aluminum
- Copper Alloys
- Plastic
- Wood
- Low-Alloy Steel

WIRE SIZES

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#1	0.2280	2-5/8"	6"	95002151	12
#2	0.2210	2-5/8"	6"	95002152	12
#3	0.2130	2-1/2"	6"	95002153	12
#4	0.2090	2-1/2"	6"	95002154	12
#5	0.2055	2-1/2"	6"	95002155	12
#6	0.2040	2-1/2"	6"	95002156	12
#7	0.2010	2-7/16"	6"	95002157	12
#8	0.1990	2-7/16"	6"	95002158	12
#9	0.1960	2-7/16"	6"	95002159	12
#10	0.1935	2-7/16"	6"	95002160	12
#11	0.1910	2-5/16"	6"	95002161	12
#12	0.1890	2-5/16"	6"	95002162	12
#13	0.1850	2-5/16"	6"	95002163	12
#14	0.1820	2-3/16"	6"	95002164	12
#15	0.1800	2-3/16"	6"	95002165	12
#16	0.1770	2-3/16"	6"	95002166	12
#17	0.1730	2-3/16"	6"	95002167	12
#18	0.1695	2-1/8"	6"	95002168	12
#19	0.1660	2-1/8"	6"	95002169	12

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#20	0.1610	2-1/8"	6"	95002170	12
#21	0.1590	2-1/8"	6"	95002171	12
#22	0.1570	2"	6"	95002172	12
#23	0.1540	2"	6"	95002173	12
#24	0.1520	2"	6"	95002174	12
#25	0.1495	1-7/8"	6"	95002175	12
#26	0.1470	1-7/8"	6"	95002176	12
#27	0.1440	1-7/8"	6"	95002177	12
#28	0.1405	1-3/4"	6"	95002178	12
#29	0.1360	1-3/4"	6"	95002179	12
#30	0.1285	1-5/8"	6"	95002180	12
#31	0.1200	1-5/8"	6"	95002181	12
#32	0.1160	1-5/8"	6"	95002182	12
#33	0.1130	1-1/2"	6"	95002183	12
#34	0.1110	1-1/2"	6"	95002184	12
#35	0.1100	1-1/2"	6"	95002185	12
#36	0.1065	1-7/16"	6"	95002186	12
#37	0.1040	1-7/16"	6"	95002187	12
#40	0.0980	1-3/8"	6"	95002190	12

AEROSPACE

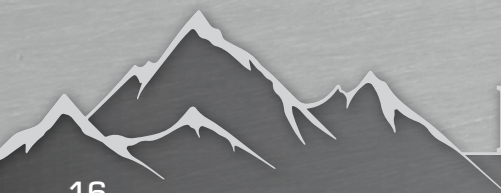

RMT

AIRCRAFT EXTENSION

Black Oxide 6" 135°

MADE IN USA



- Industrial-Grade NAS High Speed Steel (HSS) constructed for superior strength and run-out characteristics
- Surface treated for corrosion resistance and increased lubricity
- Mid length extension for deep holes in confined working conditions
- Split Point penetrates on contact and prevents "walking" of the bit
- NAS 907 Compliant
- One piece construction



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Plastic
- Wood
- Alloy Steel

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/8	0.1250	1-5/8"	6"	95001904	12
9/64	0.1406	1-3/4"	6"	95001905	12
5/32	0.1562	2"	6"	95001906	12
11/64	0.1719	2-1/8"	6"	95001907	12
3/16	0.1875	2-5/16"	6"	95001908	12
13/64	0.2031	2-7/16"	6"	95001909	12
7/32	0.2188	2-1/2"	6"	95001910	12
15/64	0.2344	2-5/8"	6"	95001911	12
1/4	0.2500	2-3/4"	6"	95001912	12
17/64	0.2656	2-7/8"	6"	95001913	12
9/32	0.2812	2-15/16"	6"	95001914	12
19/64	0.2969	3-1/16"	6"	95001915	12
5/16	0.3125	3-3/16"	6"	95001916	6
21/64	0.3281	3-5/16"	6"	95001917	6
11/32	0.3438	3-7/16"	6"	95001918	6
23/64	0.3594	3-1/2"	6"	95001919	6
3/8	0.3750	3-5/8"	6"	95001920	6
25/64	0.3906	3-3/4"	6"	95001921	6
13/32	0.4062	3-7/8"	6"	95001922	6
27/64	0.4219	3-15/16"	6"	95001923	6
7/16	0.4375	4-1/16"	6"	95001924	6
29/64	0.4531	4-3/16"	6"	95001925	6
15/32	0.4688	4-5/16"	6"	95001926	6
31/64	0.4844	4-3/8"	6"	95001927	6
1/2	0.5000	4-1/2"	6"	95001928	6

AEROSPACE

AIRCRAFT EXTENSION

Black Oxide 6" 135°

MADE IN USA



- Industrial-Grade NAS High Speed Steel (HSS) constructed for superior strength and run-out characteristics
- Surface treated for corrosion resistance and increased lubricity
- Mid length extension for deep holes in confined working conditions

- Split Point penetrates on contact and prevents "walking" of the bit
- NAS 907 Compliant
- One piece construction



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Plastic
- Wood
- Alloy Steel

WIRE SIZES

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#1	0.2280	2-5/8"	6"	95005800	12
#2	0.2210	2-5/8"	6"	95005801	12
#3	0.2130	2-1/2"	6"	95005802	12
#4	0.2090	2-1/2"	6"	95005803	12
#5	0.2055	2-1/2"	6"	95005804	12
#6	0.2040	2-1/2"	6"	95005805	12
#7	0.2010	2-7/16"	6"	95005806	12
#8	0.1990	2-7/16"	6"	95005807	12
#9	0.1960	2-7/16"	6"	95005808	12
#10	0.1935	2-7/16"	6"	95005809	12
#11	0.1910	2-5/16"	6"	95005810	12
#12	0.1890	2-5/16"	6"	95005811	12
#13	0.1850	2-5/16"	6"	95005812	12
#14	0.1820	2-3/16"	6"	95005813	12
#15	0.1800	2-3/16"	6"	95005814	12
#16	0.1770	2-3/16"	6"	95005815	12
#17	0.1730	2-3/16"	6"	95005816	12
#18	0.1695	2-1/8"	6"	95005817	12
#19	0.1660	2-1/8"	6"	95005818	12
#20	0.1610	2-1/8"	6"	95005819	12

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#21	0.1590	2-1/8"	6"	95005820	12
#22	0.1570	2"	6"	95005821	12
#23	0.1540	2"	6"	95005822	12
#24	0.1520	2"	6"	95005823	12
#25	0.1495	1-7/8"	6"	95005824	12
#26	0.1470	1-7/8"	6"	95005825	12
#27	0.1440	1-7/8"	6"	95005826	12
#28	0.1405	1-3/4"	6"	95005827	12
#29	0.1360	1-3/4"	6"	95005828	12
#30	0.1285	1-5/8"	6"	95005829	12
#31	0.1200	1-5/8"	6"	95005830	12
#32	0.1160	1-5/8"	6"	95005831	12
#33	0.1130	1-1/2"	6"	95005832	12
#34	0.1110	1-1/2"	6"	95005833	12
#35	0.1100	1-1/2"	6"	95005834	12
#36	0.1065	1-7/16"	6"	95005835	12
#37	0.1040	1-7/16"	6"	95005836	12
#38	0.1015	1-7/16"	6"	95005838	12
#39	0.0995	1-3/8"	6"	95005839	12
#40	0.0980	1-3/8"	6"	95005837	12

AEROSPACE



RMT

AIRCRAFT EXTENSION

Cobalt 6" 135°

MADE IN USA



- Produced from industrial-grade NAS Cobalt steel
- Superior red hardness for high temperature applications
- Less end load pressure required
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Steel (low and medium carbon)
- Alloy Steel
- Stainless Steel
- Strength Alloys
- Cast Iron
- Titanium
- Nickel Super Alloys

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/16	0.0625	7/8"	6"	95005896	12
5/64	0.0781	1"	6"	95005897	12
3/32	0.0938	1-1/4"	6"	95005898	12
7/64	0.1094	1-1/2"	6"	95005899	12
1/8	0.1250	1-5/8"	6"	95005900	12
9/64	0.1406	1-3/4"	6"	95005901	12
5/32	0.1562	2"	6"	95005902	12
11/64	0.1719	2-1/8"	6"	95005903	12
3/16	0.1875	2-5/16"	6"	95005904	12
13/64	0.2031	2-7/16"	6"	95005905	12
7/32	0.2188	2-1/2"	6"	95005906	12
15/64	0.2344	2-5/8"	6"	95005907	12
1/4	0.2500	2-3/4"	6"	95005908	12
5/16	0.3125	3-3/16"	6"	95005912	6

AEROSPACE

AIRCRAFT EXTENSION

6" Cobalt 135°

MADE IN USA



- Produced from industrial-grade NAS Cobalt steel
- Superior red hardness for high temperature applications
- Less end load pressure required
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION


- Steel (low and medium carbon)
- Alloy Steel
- Stainless Steel
- Strength Alloys
- Cast Iron
- Titanium
- Nickel Super Alloys

WIRE SIZES

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#1	0.2280	2-5/8"	6"	95005950	12
#2	0.2210	2-5/8"	6"	95005951	12
#3	0.2130	2-1/2"	6"	95005952	12
#4	0.2090	2-1/2"	6"	95005953	12
#5	0.2055	2-1/2"	6"	95005954	12
#6	0.2040	2-1/2"	6"	95005955	12
#7	0.2010	2-7/16"	6"	95005956	12
#8	0.1990	2-7/16"	6"	95005957	12
#9	0.1960	2-7/16"	6"	95005958	12
#10	0.1935	2-7/16"	6"	95005959	12
#11	0.1910	2-5/16"	6"	95005960	12
#12	0.1890	2-5/16"	6"	95005961	12
#13	0.1850	2-5/16"	6"	95005962	12
#14	0.1820	2-3/16"	6"	95005963	12
#15	0.1800	2-3/16"	6"	95005964	12
#16	0.1770	2-3/16"	6"	95005965	12
#17	0.1730	2-3/16"	6"	95005966	12
#18	0.1695	2-1/8"	6"	95005967	12
#19	0.1660	2-1/8"	6"	95005968	12

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#20	0.1610	2-1/8"	6"	95005969	12
#21	0.1590	2-1/8"	6"	95005970	12
#22	0.1570	2"	6"	95005971	12
#23	0.1540	2"	6"	95005972	12
#24	0.1520	2"	6"	95005973	12
#25	0.1495	1-7/8"	6"	95005974	12
#26	0.1470	1-7/8"	6"	95005975	12
#27	0.1440	1-7/8"	6"	95005976	12
#28	0.1405	1-3/4"	6"	95005977	12
#29	0.1360	1-3/4"	6"	95005978	12
#30	0.1285	1-5/8"	6"	95005979	12
#31	0.1200	1-5/8"	6"	95005980	12
#32	0.1160	1-5/8"	6"	95005981	12
#33	0.1130	1-1/2"	6"	95005982	12
#34	0.1110	1-1/2"	6"	95005983	12
#35	0.1100	1-1/2"	6"	95005984	12
#36	0.1065	1-7/16"	6"	95005985	12
#37	0.1040	1-7/16"	6"	95005986	12
#40	0.0980	1-3/8"	6"	95005987	12

AEROSPACE

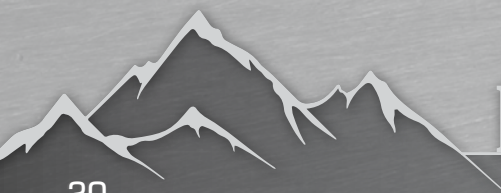

RMT

AIRCRAFT EXTENSION

12" Black Oxide 135°

MADE IN USA



- Industrial-Grade NAS High Speed Steel (HSS) constructed for superior strength and run-out characteristics
- Surface treated for corrosion resistance and increased lubricity
- Mid length extension for deep holes in confined working conditions

- Split Point penetrates on contact and prevents "walking" of the bit
- NAS 907 Compliant
- One piece construction



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Plastic
- Wood
- Steel (low and medium carbon)
- Alloy & Stainless Steel

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/8	0.1250	1-5/8"	12"	95001951	12
5/32	0.1562	2"	12"	95001952	12
3/16	0.1875	2-5/16"	12"	95001953	12
7/32	0.2188	2-1/2"	12"	95001954	12
1/4	0.2500	2-3/4"	12"	95001955	12
9/32	0.2812	2-15/16"	12"	95001956	6
5/16	0.3125	3-3/16"	12"	95001957	6
11/32	0.3438	3-7/16"	12"	95001958	6
3/8	0.3750	3-5/8"	12"	95001959	6
13/32	0.4062	3-7/8"	12"	95001960	6
7/16	0.4375	4-1/16"	12"	95001961	6
15/32	0.4688	4-5/16"	12"	95001962	6
1/2	0.5000	4-1/2"	12"	95001963	6

AEROSPACE



135° THREADED SHANK

High Speed Steel

MADE IN USA



MATERIAL APPLICATION

- Aluminum
- Alloy Steel

- Shank thread size 1/4-28
- Industrial-Grade NAS High Speed Steel (HSS) constructed for superior strength and run-out characteristics
- Surface treated for corrosion resistance and increased lubricity
- Split Point penetrates on contact and prevents "walking" of the bit
- Built to NAS 965




FRACTIONAL · WIRE · LETTER SIZES

DRILL SIZES	DECIMAL EQUIVALENT	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
3/32	0.0937	2-1/8"	953HS3/32LS	50
3/32	0.0937	1"	953HS3/32SS	50
3/32	0.0937	1/2"	953HS3/32ST	50
3/32	0.0937	13/32"	953HS3/32VS	50
1/8	0.1250	2-1/8"	953HS1/8LS	50
1/8	0.1250	1"	953HS1/8SS	50
1/8	0.1250	1/2"	953HS1/8ST	50
1/8	0.1250	13/32"	953HS1/8VS	50
5/32	0.1562	2-1/8"	953HS5/32LS	50
5/32	0.1562	1-1/4"	953HS5/32SS	50
5/32	0.1562	9/16"	953HS5/32ST	50
5/32	0.1562	13/32"	953HS5/32VS	50
3/16	0.1875	2-1/8"	953HS3/16LS	50
3/16	0.1875	1-1/4"	953HS3/16SS	50
3/16	0.1875	9/16"	953HS3/16ST	50
3/16	0.1875	13/32"	953HS3/16VS	50
7/32	0.2187	2-1/8"	953HS7/32LS	50
7/32	0.2187	1-1/4"	953HS7/32SS	50
7/32	0.2187	9/16"	953HS7/32ST	50
1/4	0.2500	2-1/8"	953HS1/4LS	50
1/4	0.2500	1-1/4"	953HS1/4SS	50
1/4	0.2500	9/16"	953HS1/4ST	50
1/4	0.2500	13/32"	953HS1/4VS	50
5/16	0.3125	2-1/8"	953HS5/16LS	50
5/16	0.3125	1-1/4"	953HS5/16SS	50
5/16	0.3125	5/8"	953HS5/16ST	50
3/8	0.3750	2-1/8"	953HS3/8LS	50

DRILL SIZES	DECIMAL EQUIVALENT	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
3/8	0.3750	1-1/4"	953HS3/8SS	50
3/8	0.3750	5/8"	953HS3/8ST	50
#40	0.0980	2-1/8"	953HS40LS	50
#40	0.0980	1"	953HS40SS	50
#40	0.0980	1/2"	953HS40ST	50
#40	0.0980	13/32"	953HS40VS	50
#35	0.1100	2-1/8"	953HS35LS	50
#35	0.1100	1"	953HS35SS	50
#35	0.1100	1/2"	953HS35ST	50
#30	0.1285	2-1/8"	953HS30LS	50
#30	0.1285	1-1/4"	953HS30SS	50
#30	0.1285	9/16"	953HS30ST	50
#30	0.1285	13/32"	953HS30VS	50
#27	0.1440	2-1/8"	953HS27LS	50
#27	0.1440	1-1/4"	953HS27SS	50
#27	0.1440	9/16"	953HS27ST	50
#27	0.1440	13/32"	953HS27VS	50
#21	0.1590	2-1/8"	953HS21LS	50
#21	0.1590	1-1/4"	953HS21SS	50
#21	0.1590	9/16"	953HS21ST	50
#21	0.1590	13/32"	953HS21VS	50
#20	0.1610	2-1/8"	953HS20LS	50
#20	0.1610	1-1/4"	953HS20SS	50
#20	0.1610	9/16"	953HS20ST	50
#20	0.1610	13/32"	953HS20VS	50
#19	0.1660	2-1/8"	953HS19LS	50
#19	0.1660	1-1/4"	953HS19SS	50

Call for additional sizes in stock

AEROSPACE

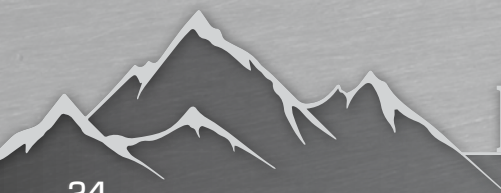

RMT

135° THREADED SHANK

High Speed Steel Cont.

MADE IN USA

DRILL SIZES	DECIMAL EQUIVALENT	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#19	0.1660	9/16"	953HS19ST	50
#19	0.1660	13/32"	953HS19VS	50
#16	0.1770	2-1/8"	953HS16LS	50
#16	0.1770	1-1/4"	953HS16SS	50
#16	0.1770	9/16"	953HS16ST	50
#16	0.1770	13/32"	953HS16VS	50
#13	0.1850	2-1/8"	953HS13LS	50
#13	0.1850	1-1/4"	953HS13SS	50
#13	0.1850	9/16"	953HS13ST	50
#13	0.1850	13/32"	953HS13VS	50
#11	0.1910	2-1/8"	953HS11LS	50
#11	0.1910	1-1/4"	953HS11SS	50
#11	0.1910	9/16"	953HS11ST	50
#11	0.1910	13/32"	953HS11VS	50
#10	0.1935	2-1/8"	953HS10LS	50
#10	0.1935	1-1/4"	953HS10SS	50
#10	0.1935	9/16"	953HS10ST	50
#10	0.1935	13/32"	953HS10VS	50
#8	0.1990	2-1/8"	953HS8LS	50
#8	0.1990	1-1/4"	953HS8SS	50
#8	0.1990	5/8"	953HS8ST	50
#8	0.1990	13/32"	953HS8VS	50
#7	0.2010	2-1/8"	953HS7LS	50
#7	0.2010	1-1/4"	953HS7SS	50
#7	0.2010	5/8"	953HS7ST	50
#7	0.2010	13/32"	953HS7VS	50
#5	0.2055	2-1/8"	953HS5LS	50

DRILL SIZES	DECIMAL EQUIVALENT	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#5	0.2055	1-1/4"	953HS5SS	50
#5	0.2055	5/8"	953HS5ST	50
#5	0.2055	13/32"	953HS5VS	50
#2	0.2210	2-1/8"	953HS2LS	50
#2	0.2210	1-1/4"	953HS2SS	50
#2	0.2210	5/8"	953HS2ST	50
#2	0.2210	13/32"	953HS2VS	50
A	0.2340	2-1/8"	953HSALS	50
A	0.2340	1-1/4"	953HSASS	50
A	0.2340	5/8"	953HSAST	50
B	0.2380	2-1/8"	953HSBLS	50
B	0.2380	1-1/4"	953HSBSS	50
B	0.2380	5/8"	953HSBST	50
C	0.2420	2-1/8"	953HSCLS	50
C	0.2420	1-1/4"	953HSCSS	50
C	0.2420	5/8"	953HSCST	50
D	0.2460	2-1/8"	953HSDL	50
D	0.2460	1-1/4"	953HSDSS	50
D	0.2460	5/8"	953HSDST	50
D	0.2460	13/32"	953HSDVS	50
F	0.2570	2-1/8"	953HSFELS	50
F	0.2570	1-1/4"	953HSFESS	50
F	0.2570	5/8"	953HSFEST	50
F	0.2570	13/32"	953HSFVVS	50
G	0.2610	2-1/8"	953HSGLS	50
G	0.2610	1-1/4"	953HSGSS	50
G	0.2610	5/8"	953HSGST	50

Call for additional sizes in stock

AEROSPACE

135° THREADED SHANK

Cobalt

MADE IN USA



- Shank thread size 1/4-28
- Produced from Industrial-Grade NAS Cobalt Steel
- Superior red hardness for high temperature applications
- Less end load pressure required
- Split Point penetrates on contact and prevents "walking" of the bit
- Built to NAS 965



MATERIAL APPLICATION

- Steel (low & medium carbon)
- Alloy Steel
- Stainless Steel
- Strength Alloys
- Cast Iron

FRACTIONAL · WIRE · LETTER SIZES

DRILL SIZES	DECIMAL EQUIVALENT	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
3/32	0.0937	2-1/8"	953C03/32LS	50
3/32	0.0937	1"	953C03/32SS	50
3/32	0.0937	1/2"	953C03/32ST	50
3/32	0.0937	13/32"	953C03/32VS	50
1/8	0.1250	2-1/8"	953C01/8LS	50
1/8	0.1250	1"	953C01/8SS	50
1/8	0.1250	1/2"	953C01/8ST	50
1/8	0.1250	13/32"	953C01/8VS	50
5/32	0.1562	2-1/8"	953C05/32LS	50
5/32	0.1562	1-1/4"	953C05/32SS	50
5/32	0.1562	9/16"	953C05/32ST	50
5/32	0.1562	13/32"	953C05/32VS	50
3/16	0.1875	2-1/8"	953C03/16LS	50
3/16	0.1875	1-1/4"	953C03/16SS	50
3/16	0.1875	9/16"	953C03/16ST	50
3/16	0.1875	13/32"	953C03/16VS	50
7/32	0.2187	2-1/8"	953C07/32LS	50
7/32	0.2187	1-1/4"	953C07/32SS	50
7/32	0.2187	9/16"	953C07/32ST	50
1/4	0.2500	2-1/8"	953C01/4LS	50
1/4	0.2500	1-1/4"	953C01/4SS	50
1/4	0.2500	9/16"	953C01/4ST	50
1/4	0.2500	13/32"	953C01/4VS	50
5/16	0.3125	2-1/8"	953C05/16LS	50
5/16	0.3125	1-1/4"	953C05/16SS	50
5/16	0.3125	5/8"	953C05/16ST	50
3/8	0.3750	2-1/8"	953C03/8LS	50

Call for additional sizes in stock

DRILL SIZES	DECIMAL EQUIVALENT	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
3/8	0.3750	1-1/4"	953C03/8SS	50
3/8	0.3750	5/8"	953C03/8ST	50
#40	0.0980	2-1/8"	953C040LS	50
#40	0.0980	1"	953C040SS	50
#40	0.0980	1/2"	953C040ST	50
#40	0.0980	13/32"	953C040VS	50
#35	0.1100	2-1/8"	953C035LS	50
#35	0.1100	1"	953C035SS	50
#35	0.1100	1/2"	953C035ST	50
#30	0.1285	2-1/8"	953C030LS	50
#30	0.1285	1-1/4"	953C030SS	50
#30	0.1285	9/16"	953C030ST	50
#30	0.1285	13/32"	953C030VS	50
#27	0.1440	2-1/8"	953C027LS	50
#27	0.1440	1-1/4"	953C027SS	50
#27	0.1440	9/16"	953C027ST	50
#27	0.1440	13/32"	953C027VS	50
#21	0.1590	2-1/8"	953C021LS	50
#21	0.1590	1-1/4"	953C021SS	50
#21	0.1590	9/16"	953C021ST	50
#21	0.1590	13/32"	953C021VS	50
#20	0.1610	2-1/8"	953C020LS	50
#20	0.1610	1-1/4"	953C020SS	50
#20	0.1610	9/16"	953C020ST	50
#20	0.1610	13/32"	953C020VS	50
#19	0.1660	2-1/8"	953C019LS	50
#19	0.1660	1-1/4"	953C019SS	50

AEROSPACE



RMT

135° THREADED SHANK

Cobalt Cont.

MADE IN USA

DRILL SIZES	DECIMAL EQUIVALENT	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#19	0.1660	9/16"	953C019ST	50
#19	0.1660	13/32"	953C019VS	50
#16	0.1770	2-1/8"	953C016LS	50
#16	0.1770	1-1/4"	953C016SS	50
#16	0.1770	9/16"	953C016ST	50
#16	0.1770	13/32"	953C016VS	50
#13	0.1850	2-1/8"	953C013LS	50
#13	0.1850	1-1/4"	953C013SS	50
#13	0.1850	9/16"	953C013ST	50
#13	0.1850	13/32"	953C013VS	50
#11	0.1910	2-1/8"	953C011LS	50
#11	0.1910	1-1/4"	953C011SS	50
#11	0.1910	9/16"	953C011ST	50
#11	0.1910	13/32"	953C011VS	50
#10	0.1935	2-1/8"	953C010LS	50
#10	0.1935	1-1/4"	953C010SS	50
#10	0.1935	9/16"	953C010ST	50
#10	0.1935	13/32"	953C010VS	50
#8	0.1990	2-1/8"	953C08LS	50
#8	0.1990	1-1/4"	953C08SS	50
#8	0.1990	5/8"	953C08ST	50
#8	0.1990	13/32"	953C08VS	50
#7	0.2010	2-1/8"	953C07LS	50
#7	0.2010	1-1/4"	953C07SS	50
#7	0.2010	5/8"	953C07ST	50
#7	0.2010	13/32"	953C07VS	50
#5	0.2055	2-1/8"	953C05LS	50

Call for additional sizes in stock

DRILL SIZES	DECIMAL EQUIVALENT	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#5	0.2055	1-1/4"	953C05SS	50
#5	0.2055	5/8"	953C05ST	50
#5	0.2055	13/32"	953C05VS	50
#2	0.2210	2-1/8"	953C02LS	50
#2	0.2210	1-1/4"	953C02SS	50
#2	0.2210	5/8"	953C02ST	50
#2	0.2210	13/32"	953C02VS	50
A	0.2340	2-1/8"	953C0ALS	50
A	0.2340	1-1/4"	953C0ASS	50
A	0.2340	5/8"	953C0AST	50
B	0.2380	2-1/8"	953C0BLS	50
B	0.2380	1-1/4"	953C0BSS	50
B	0.2380	5/8"	953C0BST	50
C	0.2420	2-1/8"	953C0CLS	50
C	0.2420	1-1/4"	953C0CSS	50
C	0.2420	5/8"	953C0CST	50
D	0.2460	2-1/8"	953C0DLS	50
D	0.2460	1-1/4"	953C0DSS	50
D	0.2460	5/8"	953C0DST	50
D	0.2460	13/32"	953C0DVS	50
F	0.2570	2-1/8"	953C0FLS	50
F	0.2570	1-1/4"	953C0FSS	50
F	0.2570	5/8"	953C0FST	50
F	0.2570	13/32"	953C0FVS	50
G	0.2610	2-1/8"	953C0GLS	50
G	0.2610	1-1/4"	953C0GSS	50
G	0.2610	5/8"	953C0GST	50

AEROSPACE

BRIGHT 118°

General Purpose

MADE IN USA



- Excellent general use drill bit
- Flutes are precision ground for faster, more efficient chip removal
- Industrial-Grade NAS High Speed Steel (HSS)



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low and medium carbon)

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/16	0.0625	7/8"	1-7/8"	95000550	12
5/64	0.0781	1"	2"	95000551	12
3/32	0.0938	1-1/4"	2-1/4"	95000552	12
7/64	0.1094	1-1/2"	2-5/8"	95000553	12
1/8	0.1250	1-5/8"	2-3/4"	95000554	12
9/64	0.1406	1-3/4"	2-7/8"	95000555	12
5/32	0.1562	2"	3-1/8"	95000556	12
11/64	0.1719	2-1/8"	3-1/4"	95000557	12
3/16	0.1875	2-5/16"	3-1/2"	95000558	12
13/64	0.2031	2-7/16"	3-5/8"	95000559	12
7/32	0.2188	2-1/2"	3-3/4"	95000560	12
15/64	0.2344	2-5/8"	3-7/8"	95000561	12
1/4	0.2500	2-3/4"	4"	95000562	12
17/64	0.2656	2-7/8"	4-1/8"	95000563	12
9/32	0.2812	2-15/16"	4-1/4"	95000564	12
19/64	0.2969	3-1/16"	4-3/8"	95000565	12
5/16	0.3125	3-3/16"	4-1/2"	95000566	6
21/64	0.3281	3-5/16"	4-5/8"	95000567	6
11/32	0.3438	3-7/16"	4-3/4"	95000568	6
23/64	0.3594	3-1/2"	4-7/8"	95000569	6
3/8	0.3750	3-5/8"	5"	95000570	6
25/64	0.3906	3-3/4"	5-1/8"	95000571	6
13/32	0.4062	3-7/8"	5-1/4"	95000572	6
27/64	0.4219	3-15/16"	5-3/8"	95000573	6
7/16	0.4375	4-1/16"	5-1/2"	95000574	6
29/64	0.4531	4-3/16"	5-5/8"	95000575	6
15/32	0.4688	4-5/16"	5-3/4"	95000576	6
31/64	0.4844	4-3/8"	5-7/8"	95000577	6
1/2	0.5000	4-1/2"	6"	95000578	6

JOBBER LENGTH



RMT



- Excellent general use drill bit
- Flutes are precision ground for faster, more efficient chip removal
- Industrial-Grade NAS High Speed Steel (HSS)



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low and medium carbon)

WIRE SIZES

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#1	0.2280	2-5/8"	3-7/8"	95001600	12
#2	0.2210	2-5/8"	3-7/8"	95001601	12
#3	0.2130	2-1/2"	3-3/4"	95001602	12
#4	0.2090	2-1/2"	3-3/4"	95001603	12
#5	0.2055	2-1/2"	3-3/4"	95001604	12
#6	0.2040	2-1/2"	3-3/4"	95001605	12
#7	0.2010	2-7/16"	3-5/8"	95001606	12
#8	0.1990	2-7/16"	3-5/8"	95001607	12
#9	0.1960	2-7/16"	3-5/8"	95001608	12
#10	0.1935	2-7/16"	3-5/8"	95001609	12
#11	0.1910	2-5/16"	3-1/2"	95001610	12
#12	0.1890	2-5/16"	3-1/2"	95001611	12
#13	0.1850	2-5/16"	3-1/2"	95001612	12
#14	0.1820	2-3/16"	3-3/8"	95001613	12
#15	0.1800	2-3/16"	3-3/8"	95001614	12
#16	0.1770	2-3/16"	3-3/8"	95001615	12
#17	0.1730	2-3/16"	3-3/8"	95001616	12
#18	0.1695	2-1/8"	3-1/4"	95001617	12
#19	0.1660	2-1/8"	3-1/4"	95001618	12
#20	0.1610	2-1/8"	3-1/4"	95001619	12
#21	0.1590	2-1/8"	3-1/4"	95001620	12
#22	0.1570	2"	3-1/8"	95001621	12
#23	0.1540	2"	3-1/8"	95001622	12
#24	0.1520	2"	3-1/8"	95001623	12
#25	0.1495	1-7/8"	3"	95001624	12
#26	0.1470	1-7/8"	3"	95001625	12
#27	0.1440	1-7/8"	3"	95001626	12
#28	0.1405	1-3/4"	2-7/8"	95001627	12
#29	0.1360	1-3/4"	2-7/8"	95001628	12
#30	0.1285	1-5/8"	2-3/4"	95001629	12


WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#31	0.1200	1-5/8"	2-3/4"	95001630	12
#32	0.1160	1-5/8"	2-3/4"	95001631	12
#33	0.1130	1-1/2"	2-5/8"	95001632	12
#34	0.1110	1-1/2"	2-5/8"	95001633	12
#35	0.1100	1-1/2"	2-5/8"	95001634	12
#36	0.1065	1-7/16"	2-1/2"	95001635	12
#37	0.1040	1-7/16"	2-1/2"	95001636	12
#38	0.1015	1-7/16"	2-1/2"	95001637	12
#39	0.0995	1-3/8"	2-3/8"	95001638	12
#40	0.0980	1-3/8"	2-3/8"	95001639	12
#41	0.0960	1-3/8"	2-3/8"	95001640	12
#42	0.0935	1-1/4"	2-1/4"	95001641	12
#43	0.0890	1-1/4"	2-1/4"	95001642	12
#44	0.0860	1-1/8"	2-1/8"	95001643	12
#45	0.0820	1-1/8"	2-1/8"	95001644	12
#46	0.0810	1-1/8"	2-1/8"	95001645	12
#47	0.0785	1"	2"	95001646	12
#48	0.0760	1"	2"	95001647	12
#49	0.0730	1"	2"	95001648	12
#50	0.0700	1"	2"	95001649	12
#51	0.0670	1"	2"	95001650	12
#52	0.0635	7/8"	1-7/8"	95001651	12
#53	0.0595	7/8"	1-7/8"	95001652	12
#54	0.0550	7/8"	1-7/8"	95001653	12
#55	0.0520	7/8"	1-7/8"	95001654	12
#56	0.0465	3/4"	1-3/4"	95001655	12
#57	0.0430	3/4"	1-3/4"	95001656	12
#58	0.0420	11/16"	1-5/8"	95001657	12
#59	0.0410	11/16"	1-5/8"	95001658	12
#60	0.0400	11/16"	1-5/8"	95001659	12

JOBBER LENGTH

BRIGHT 118°

General Purpose

MADE IN USA



- Excellent general use drill bit
- Flutes are precision ground for faster, more efficient chip removal
- Industrial-Grade NAS High Speed Steel (HSS)




MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low and medium carbon)

LETTER SIZES

LETTER SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
A	0.2340	2-5/8"	3-7/8"	95001700	12
B	0.2380	2-3/4"	4"	95001701	12
C	0.2420	2-3/4"	4"	95001702	12
D	0.2460	2-3/4"	4"	95001703	12
E	0.2500	2-3/4"	4"	95001704	12
F	0.2570	2-7/8"	4-1/8"	95001705	12
G	0.2610	2-7/8"	4-1/8"	95001706	12
H	0.2660	2-7/8"	4-1/8"	95001707	12
I	0.2720	2-7/8"	4-1/8"	95001708	12
J	0.2770	2-7/8"	4-1/8"	95001709	12
K	0.2810	2-15/16"	4-1/4"	95001710	12
L	0.2900	2-15/16"	4-1/4"	95001711	12
M	0.2950	3-1/16"	4-3/8"	95001712	12
N	0.3020	3-1/16"	4-3/8"	95001713	12
O	0.3160	3-3/16"	4-1/2"	95001714	6
P	0.3230	3-5/16"	4-5/8"	95001715	6
Q	0.3320	3-7/16"	4-3/4"	95001716	6
R	0.3390	3-7/16"	4-3/4"	95001717	6
S	0.3480	3-1/2"	4-7/8"	95001718	6
T	0.3580	3-1/2"	4-7/8"	95001719	6
U	0.3680	3-5/8"	5"	95001720	6
V	0.3770	3-5/8"	5"	95001721	6
W	0.3860	3-3/4"	5-1/8"	95001722	6
X	0.3970	3-3/4"	5-1/8"	95001723	6
Y	0.4040	3-7/8"	5-1/4"	95001724	6
Z	0.4130	3-7/8"	5-1/4"	95001725	6

JOBBER LENGTH

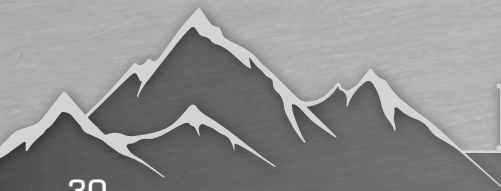

RMT

BLACK OXIDE 118°

General Purpose

MADE IN USA



- Industrial-Grade NAS High Speed Steel (HSS)
- Excellent general use drill bit
- Surface treated for corrosion resistance and increased lubricity
- Oil treated finish ideal for drilling in various types of metals



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low and medium carbon)

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/16	0.0625	7/8"	1-7/8"	95000500	12
5/64	0.0781	1"	2"	95000501	12
3/32	0.0938	1-1/4"	2-1/4"	95000502	12
7/64	0.1094	1-1/2"	2-5/8"	95000503	12
1/8	0.1250	1-5/8"	2-3/4"	95000504	12
9/64	0.1406	1-3/4"	2-7/8"	95000505	12
5/32	0.1562	2"	3-1/8"	95000506	12
11/64	0.1719	2-1/8"	3-1/4"	95000507	12
3/16	0.1875	2-5/16"	3-1/2"	95000508	12
13/64	0.2031	2-7/16"	3-5/8"	95000509	12
7/32	0.2188	2-1/2"	3-3/4"	95000510	12
15/64	0.2344	2-5/8"	3-7/8"	95000511	12
1/4	0.2500	2-3/4"	4"	95000512	12
17/64	0.2656	2-7/8"	4-1/8"	95000513	12
9/32	0.2812	2-15/16"	4-1/4"	95000514	12
19/64	0.2969	3-1/16"	4-3/8"	95000515	12
5/16	0.3125	3-3/16"	4-1/2"	95000516	6
21/64	0.3281	3-5/16"	4-5/8"	95000517	6
11/32	0.3438	3-7/16"	4-3/4"	95000518	6
23/64	0.3594	3-1/2"	4-7/8"	95000519	6
3/8	0.3750	3-5/8"	5"	95000520	6
25/64	0.3906	3-3/4"	5-1/8"	95000521	6
13/32	0.4062	3-7/8"	5-1/4"	95000522	6
27/64	0.4219	3-15/16"	5-3/8"	95000523	6
7/16	0.4375	4-1/16"	5-1/2"	95000524	6
29/64	0.4531	4-3/16"	5-5/8"	95000525	6
15/32	0.4688	4-5/16"	5-3/4"	95000526	6
31/64	0.4844	4-3/8"	5-7/8"	95000527	6
1/2	0.5000	4-1/2"	6"	95000528	6

JOBBER LENGTH

BLACK OXIDE 118°

General Purpose

MADE IN USA



- Industrial-Grade NAS High Speed Steel (HSS)
- Excellent general use drill bit
- Surface treated for corrosion resistance and increased lubricity
- Oil treated finish ideal for drilling in various types of metals



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low and medium carbon)

WIRE SIZES

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#1	0.2280	2-5/8"	3-7/8"	95005601	12
#2	0.2210	2-5/8"	3-7/8"	95005602	12
#3	0.2130	2-1/2"	3-3/4"	95005603	12
#4	0.2090	2-1/2"	3-3/4"	95005604	12
#5	0.2055	2-1/2"	3-3/4"	95005605	12
#6	0.2040	2-1/2"	3-3/4"	95005606	12
#7	0.2010	2-7/16"	3-5/8"	95005607	12
#8	0.1990	2-7/16"	3-5/8"	95005608	12
#9	0.1960	2-7/16"	3-5/8"	95005609	12
#10	0.1935	2-7/16"	3-5/8"	95005610	12
#11	0.1910	2-5/16"	3-1/2"	95005611	12
#12	0.1890	2-5/16"	3-1/2"	95005612	12
#13	0.1850	2-5/16"	3-1/2"	95005613	12
#14	0.1820	2-3/16"	3-3/8"	95005614	12
#15	0.1800	2-3/16"	3-3/8"	95005615	12
#16	0.1770	2-3/16"	3-3/8"	95005616	12
#17	0.1730	2-3/16"	3-3/8"	95005617	12
#18	0.1695	2-1/8"	3-1/4"	95005618	12
#19	0.1660	2-1/8"	3-1/4"	95005619	12
#20	0.1610	2-1/8"	3-1/4"	95005620	12
#21	0.1590	2-1/8"	3-1/4"	95005621	12
#22	0.1570	2"	3-1/8"	95005622	12
#23	0.1540	2"	3-1/8"	95005623	12
#24	0.1520	2"	3-1/8"	95005624	12
#25	0.1495	1-7/8"	3"	95005625	12
#26	0.1470	1-7/8"	3"	95005626	12
#27	0.1440	1-7/8"	3"	95005627	12
#28	0.1405	1-3/4"	2-7/8"	95005628	12
#29	0.1360	1-3/4"	2-7/8"	95005629	12
#30	0.1285	1-5/8"	2-3/4"	95005630	12

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#31	0.1200	1-5/8"	2-3/4"	95005631	12
#32	0.1160	1-5/8"	2-3/4"	95005632	12
#33	0.1130	1-1/2"	2-5/8"	95005633	12
#34	0.1110	1-1/2"	2-5/8"	95005634	12
#35	0.1100	1-1/2"	2-5/8"	95005635	12
#36	0.1065	1-7/16"	2-1/2"	95005636	12
#37	0.1040	1-7/16"	2-1/2"	95005637	12
#38	0.1015	1-7/16"	2-1/2"	95005638	12
#39	0.0995	1-3/8"	2-3/8"	95005639	12
#40	0.0980	1-3/8"	2-3/8"	95005640	12
#41	0.0960	1-3/8"	2-3/8"	95005641	12
#42	0.0935	1-1/4"	2-1/4"	95005642	12
#43	0.0890	1-1/4"	2-1/4"	95005643	12
#44	0.0860	1-1/8"	2-1/8"	95005644	12
#45	0.0820	1-1/8"	2-1/8"	95005645	12
#46	0.0810	1-1/8"	2-1/8"	95005646	12
#47	0.0785	1"	2"	95005647	12
#48	0.0760	1"	2"	95005648	12
#49	0.0730	1"	2"	95005649	12
#50	0.0700	1"	2"	95005650	12
#51	0.0670	1"	2"	95005651	12
#52	0.0635	7/8"	1-7/8"	95005652	12
#53	0.0595	7/8"	1-7/8"	95005653	12
#54	0.0550	7/8"	1-7/8"	95005654	12
#55	0.0520	7/8"	1-7/8"	95005655	12
#56	0.0465	3/4"	1-3/4"	95005656	12
#57	0.0430	3/4"	1-3/4"	95005657	12
#58	0.0420	11/16"	1-5/8"	95005658	12
#59	0.0410	11/16"	1-5/8"	95005659	12
#60	0.0400	11/16"	1-5/8"	95005660	12

JOBBER LENGTH



RMT

BLACK OXIDE 118°

General Purpose

MADE IN USA



- Industrial-Grade NAS High Speed Steel (HSS)
- Excellent general use drill bit
- Surface treated for corrosion resistance and increased lubricity
- Oil treated finish ideal for drilling in various types of metals



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low and medium carbon)

LETTER SIZES

LETTER SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
A	0.2340	2-5/8"	3-7/8"	95005700	12
B	0.2380	2-3/4"	4"	95005701	12
C	0.2420	2-3/4"	4"	95005702	12
D	0.2460	2-3/4"	4"	95005703	12
E	0.2500	2-3/4"	4"	95005704	12
F	0.2570	2-7/8"	4-1/8"	95005705	12
G	0.2610	2-7/8"	4-1/8"	95005706	12
H	0.2660	2-7/8"	4-1/8"	95005707	12
I	0.2720	2-7/8"	4-1/8"	95005708	12
J	0.2770	2-7/8"	4-1/8"	95005709	12
K	0.2810	2-15/16"	4-1/4"	95005710	12
L	0.2900	2-15/16"	4-1/4"	95005711	12
M	0.2950	3-1/16"	4-3/8"	95005712	12
N	0.3020	3-1/16"	4-3/8"	95005713	12
O	0.3160	3-3/16"	4-1/2"	95005714	6
P	0.3230	3-5/16"	4-5/8"	95005715	6
Q	0.3320	3-7/16"	4-3/4"	95005716	6
R	0.3390	3-7/16"	4-3/4"	95005717	6
S	0.3480	3-1/2"	4-7/8"	95005718	6
T	0.3580	3-1/2"	4-7/8"	95005719	6
U	0.3680	3-5/8"	5"	95005720	6
V	0.3770	3-5/8"	5"	95005721	6
W	0.3860	3-3/4"	5-1/8"	95005722	6
X	0.3970	3-3/4"	5-1/8"	95005723	6
Y	0.4040	3-7/8"	5-1/4"	95005724	6
Z	0.4130	3-7/8"	5-1/4"	95005725	6

JOBBER LENGTH



BRIGHT 135°

Heavy Duty

MADE IN USA



- Excellent general use drill bit
- Split point tip penetrates surface on contact and prevents drill bit "walking"
- Flutes are precision CNC ground for faster, more efficient chip evacuation
- Industrial-grade NAS High Speed Steel (HSS)



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low & medium carbon)
- Stainless Steel
- Alloy Steel

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/16	0.0625	7/8"	1-7/8"	95003300	12
5/64	0.0781	1"	2"	95003301	12
3/32	0.0938	1-1/4"	2-1/4"	95003302	12
7/64	0.1094	1-1/2"	2-5/8"	95003303	12
1/8	0.1250	1-5/8"	2-3/4"	95003304	12
9/64	0.1406	1-3/4"	2-7/8"	95003305	12
5/32	0.1562	2"	3-1/8"	95003306	12
11/64	0.1719	2-1/8"	3-1/4"	95003307	12
3/16	0.1875	2-5/16"	3-1/2"	95003308	12
13/64	0.2031	2-7/16"	3-5/8"	95003309	12
7/32	0.2188	2-1/2"	3-3/4"	95003310	12
15/64	0.2344	2-5/8"	3-7/8"	95003311	12
1/4	0.2500	2-3/4"	4"	95003312	12
17/64	0.2656	2-7/8"	4-1/8"	95003313	12
9/32	0.2812	2-15/16"	4-1/4"	95003314	12
19/64	0.2969	3-1/16"	4-3/8"	95003315	12
5/16	0.3125	3-3/16"	4-1/2"	95003316	6
21/64	0.3281	3-5/16"	4-5/8"	95003317	6
11/32	0.3438	3-7/16"	4-3/4"	95003318	6
23/64	0.3591	3-1/2"	4-7/8"	95003319	6
3/8	0.3750	3-5/8"	5"	95003320	6
25/64	0.3906	3-3/4"	5-1/8"	95003321	6
13/32	0.4062	3-7/8"	5-1/4"	95003322	6
27/64	0.4219	3-15/16"	5-3/8"	95003323	6
7/16	0.4375	4-1/16"	5-1/2"	95003324	6
29/64	0.4531	4-3/16"	5-5/8"	95003325	6
15/32	0.4688	4-5/16"	5-3/4"	95003326	6
31/64	0.4844	4-3/8"	5-7/8"	95003327	6
1/2	0.5000	4-1/2"	6"	95003328	6

Drill bits from 7/64" to 1/2" are Split Point

JOBBER LENGTH



RMT



- Excellent general use drill bit
- Split point tip penetrates surface on contact and prevents drill bit "walking"
- Flutes are precision CNC ground for faster, more efficient chip evacuation
- Industrial-grade NAS High Speed Steel (HSS)



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low & medium carbon)
- Stainless Steel
- Alloy Steel

WIRE SIZES

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#1	0.2280	2-5/8"	3-7/8"	95003400	12
#2	0.2210	2-5/8"	3-7/8"	95003401	12
#3	0.2130	2-1/2"	3-3/4"	95003402	12
#4	0.2090	2-1/2"	3-3/4"	95003403	12
#5	0.2055	2-1/2"	3-3/4"	95003404	12
#6	0.2040	2-1/2"	3-3/4"	95003405	12
#7	0.2010	2-7/16"	3-5/8"	95003406	12
#8	0.1990	2-7/16"	3-5/8"	95003407	12
#9	0.1960	2-7/16"	3-5/8"	95003408	12
#10	0.1935	2-7/16"	3-5/8"	95003409	12
#11	0.1910	2-5/16"	3-1/2"	95003410	12
#12	0.1890	2-5/16"	3-1/2"	95003411	12
#13	0.1850	2-5/16"	3-1/2"	95003412	12
#14	0.1820	2-3/16"	3-3/8"	95003413	12
#15	0.1800	2-3/16"	3-3/8"	95003414	12
#16	0.1770	2-3/16"	3-3/8"	95003415	12
#17	0.1730	2-3/16"	3-3/8"	95003416	12
#18	0.1695	2-1/8"	3-1/4"	95003417	12
#19	0.1660	2-1/8"	3-1/4"	95003418	12
#20	0.1610	2-1/8"	3-1/4"	95003419	12
#21	0.1590	2-1/8"	3-1/4"	95003420	12
#22	0.1570	2"	3-1/8"	95003421	12
#23	0.1540	2"	3-1/8"	95003422	12
#24	0.1520	2"	3-1/8"	95003423	12
#25	0.1495	1-7/8"	3"	95003424	12
#26	0.1470	1-7/8"	3"	95003425	12
#27	0.1440	1-7/8"	3"	95003426	12
#28	0.1405	1-3/4"	2-7/8"	95003427	12
#29	0.1360	1-3/4"	2-7/8"	95003428	12
#30	0.1285	1-5/8"	2-3/4"	95003429	12

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#31	0.1200	1-5/8"	2-3/4"	95003430	12
#32	0.1160	1-5/8"	2-3/4"	95003431	12
#33	0.1130	1-1/2"	2-5/8"	95003432	12
#34	0.1110	1-1/2"	2-5/8"	95003433	12
#35	0.1100	1-1/2"	2-5/8"	95003434	12
#36	0.1065	1-7/16"	2-1/2"	95003435	12
#37	0.1040	1-7/16"	2-1/2"	95003436	12
#38	0.1015	1-7/16"	2-1/2"	95003437	12
#39	0.0995	1-3/8"	2-3/8"	95003438	12
#40	0.0980	1-3/8"	2-3/8"	95003439	12
#41	0.0960	1-3/8"	2-3/8"	95003440	12
#42	0.0935	1-1/4"	2-1/4"	95003441	12
#43	0.0890	1-1/4"	2-1/4"	95003442	12
#44	0.0860	1-1/8"	2-1/8"	95003443	12
#45	0.0820	1-1/8"	2-1/8"	95003444	12
#46	0.0810	1-1/8"	2-1/8"	95003445	12
#47	0.0785	1"	2"	95003446	12
#48	0.0760	1"	2"	95003447	12
#49	0.0730	1"	2"	95003448	12
#50	0.0700	1"	2"	95003449	12
#51	0.0670	1"	2"	95003450	12
#52	0.0635	7/8"	1-7/8"	95003451	12
#53	0.0595	7/8"	1-7/8"	95003452	12
#54	0.0550	7/8"	1-7/8"	95003453	12
#55	0.0520	7/8"	1-7/8"	95003454	12
#56	0.0465	3/4"	1-3/4"	95003455	12
#57	0.0430	3/4"	1-3/4"	95003456	12
#58	0.0420	11/16"	1-5/8"	95003457	12
#59	0.0410	11/16"	1-5/8"	95003458	12
#60	0.0400	11/16"	1-5/8"	95003459	12

JOBBER LENGTH

Drill bits from #1 to #52 are Split Point

BRIGHT 135°

Heavy Duty

MADE IN USA



- Excellent general use drill bit
- Split point tip penetrates surface on contact and prevents drill bit "walking"
- Flutes are precision CNC ground for faster, more efficient chip evacuation
- Industrial-grade NAS High Speed Steel (HSS)



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low & medium carbon)
- Stainless Steel
- Alloy Steel

LETTER SIZES

LETTER SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
A	0.2340	2-5/8"	3-7/8"	95003500	12
B	0.2380	2-3/4"	4"	95003501	12
C	0.2420	2-3/4"	4"	95003502	12
D	0.2460	2-3/4"	4"	95003503	12
E	0.2500	2-3/4"	4"	95003504	12
F	0.2570	2-7/8"	4-1/8"	95003505	12
G	0.2610	2-7/8"	4-1/8"	95003506	12
H	0.2660	2-7/8"	4-1/8"	95003507	12
I	0.2720	2-7/8"	4-1/8"	95003508	12
J	0.2770	2-7/8"	4-1/8"	95003509	12
K	0.2810	2-15/16"	4-1/4"	95003510	12
L	0.2900	2-15/16"	4-1/4"	95003511	12
M	0.2950	3-1/16"	4-3/8"	95003512	12
N	0.3020	3-1/16"	4-3/8"	95003513	12
O	0.3160	3-3/16"	4-3/8"	95003514	6
P	0.3230	3-5/16"	4-5/8"	95003515	6
Q	0.3320	3-7/16"	4-3/4"	95003516	6
R	0.3390	3-7/16"	4-3/4"	95003517	6
S	0.3480	3-1/2"	4-7/8"	95003518	6
T	0.3580	3-1/2"	4-7/8"	95003519	6
U	0.3680	3-5/8"	5"	95003520	6
V	0.3770	3-5/8"	5"	95003521	6
W	0.3860	3-3/4"	5-1/8"	95003522	6
X	0.3970	3-3/4"	5-1/8"	95003523	6
Y	0.4040	3-7/8"	5-1/4"	95003524	6
Z	0.4130	3-7/8"	5-1/4"	95003525	6

JOBBER LENGTH



RMT

BLACK OXIDE 135°

Heavy Duty

MADE IN USA



- Industrial-Grade NAS High Speed Steel (HSS)
- Surface treated for corrosion resistance and increased lubricity
- Oil treated finish ideal for drilling in various types of metals
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low and medium carbon)
- Alloy Steel
- Stainless Steel

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/16	0.0625	7/8"	1-7/8"	95000600	12
5/64	0.0781	1"	2"	95000601	12
3/32	0.0938	1-1/4"	2-1/4"	95000602	12
7/64	0.1094	1-1/2"	2-5/8"	95000603	12
1/8	0.1250	1-5/8"	2-3/4"	95000604	12
9/64	0.1406	1-3/4"	2-7/8"	95000605	12
5/32	0.1562	2"	3-1/8"	95000606	12
11/64	0.1719	2-1/8"	3-1/4"	95000607	12
3/16	0.1875	2-5/16"	3-1/2"	95000608	12
13/64	0.2031	2-7/16"	3-5/8"	95000609	12
7/32	0.2188	2-1/2"	3-3/4"	95000610	12
15/64	0.2344	2-5/8"	3-7/8"	95000611	12
1/4	0.2500	2-3/4"	4"	95000612	12
17/64	0.2656	2-7/8"	4-1/8"	95000613	12
9/32	0.2812	2-15/16"	4-1/4"	95000614	12
19/64	0.2969	3-1/16"	4-3/8"	95000615	12
5/16	0.3125	3-3/16"	4-1/2"	95000616	6
21/64	0.3281	3-5/16"	4-5/8"	95000617	6
11/32	0.3438	3-7/16"	4-3/4"	95000618	6
23/64	0.3594	3-1/2"	4-7/8"	95000619	6
3/8	0.3750	3-5/8"	5"	95000620	6
25/64	0.3906	3-3/4"	5-1/8"	95000621	6
13/32	0.4062	3-7/8"	5-1/4"	95000622	6
27/64	0.4219	3-15/16"	5-3/8"	95000623	6
7/16	0.4375	4-1/16"	5-1/2"	95000624	6
29/64	0.4531	4-3/16"	5-5/8"	95000625	6
15/32	0.4688	4-5/16"	5-3/4"	95000626	6
31/64	0.4844	4-3/8"	5-7/8"	95000627	6
1/2	0.5000	4-1/2"	6"	95000628	6

Drill bits from 7/64" to 1/2" are Split Point

JOBBER LENGTH

BLACK OXIDE 135°

Heavy Duty

MADE IN USA



- Industrial-Grade NAS High Speed Steel (HSS)
- Surface treated for corrosion resistance and increased lubricity
- Oil treated finish ideal for drilling in various types of metals
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low and medium carbon)
- Alloy Steel
- Stainless Steel

WIRE SIZES

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#1	0.2280	2-5/8"	3-7/8"	95002600	12
#2	0.2210	2-5/8"	3-7/8"	95002601	12
#3	0.2130	2-1/2"	3-3/4"	95002602	12
#4	0.2090	2-1/2"	3-3/4"	95002603	12
#5	0.2055	2-1/2"	3-3/4"	95002604	12
#6	0.2040	2-1/2"	3-3/4"	95002605	12
#7	0.2010	2-7/16"	3-5/8"	95002606	12
#8	0.1990	2-7/16"	3-5/8"	95002607	12
#9	0.1960	2-7/16"	3-5/8"	95002608	12
#10	0.1935	2-7/16"	3-5/8"	95002609	12
#11	0.1910	2-5/16"	3-1/2"	95002610	12
#12	0.1890	2-5/16"	3-1/2"	95002611	12
#13	0.1850	2-5/16"	3-1/2"	95002612	12
#14	0.1820	2-3/16"	3-3/8"	95002613	12
#15	0.1800	2-3/16"	3-3/8"	95002614	12
#16	0.1770	2-3/16"	3-3/8"	95002615	12
#17	0.1730	2-3/16"	3-3/8"	95002616	12
#18	0.1695	2-1/8"	3-1/4"	95002617	12
#19	0.1660	2-1/8"	3-1/4"	95002618	12
#20	0.1610	2-1/8"	3-1/4"	95002619	12
#21	0.1590	2-1/8"	3-1/4"	95002620	12
#22	0.1570	2"	3-1/8"	95002621	12
#23	0.1540	2"	3-1/8"	95002622	12
#24	0.1520	2"	3-1/8"	95002623	12
#25	0.1495	1-7/8"	3"	95002624	12
#26	0.1470	1-7/8"	3"	95002625	12
#27	0.1440	1-7/8"	3"	95002626	12
#28	0.1405	1-3/4"	2-7/8"	95002627	12
#29	0.1360	1-3/4"	2-7/8"	95002628	12
#30	0.1285	1-5/8"	2-3/4"	95002629	12

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#31	0.1200	1-5/8"	2-3/4"	95002630	12
#32	0.1160	1-5/8"	2-3/4"	95002631	12
#33	0.1130	1-1/2"	2-5/8"	95002632	12
#34	0.1110	1-1/2"	2-5/8"	95002633	12
#35	0.1100	1-1/2"	2-5/8"	95002634	12
#36	0.1065	1-7/16"	2-1/2"	95002635	12
#37	0.1040	1-7/16"	2-1/2"	95002636	12
#38	0.1015	1-7/16"	2-1/2"	95002637	12
#39	0.0995	1-3/8"	2-3/8"	95002638	12
#40	0.0980	1-3/8"	2-3/8"	95002639	12
#41	0.0960	1-3/8"	2-3/8"	95002640	12
#42	0.0935	1-1/4"	2-1/4"	95002641	12
#43	0.0890	1-1/4"	2-1/4"	95002642	12
#44	0.0860	1-1/8"	2-1/8"	95002643	12
#45	0.0820	1-1/8"	2-1/8"	95002644	12
#46	0.0810	1-1/8"	2-1/8"	95002645	12
#47	0.0785	1"	2"	95002646	12
#48	0.0760	1"	2"	95002647	12
#49	0.0730	1"	2"	95002648	12
#50	0.0700	1"	2"	95002649	12
#51	0.0670	1"	2"	95002650	12
#52	0.0635	7/8"	1-7/8"	95002651	12
#53	0.0595	7/8"	1-7/8"	95002652	12
#54	0.0550	7/8"	1-7/8"	95002653	12
#55	0.0520	7/8"	1-7/8"	95002654	12
#56	0.0465	3/4"	1-3/4"	95002655	12
#57	0.0430	3/4"	1-3/4"	95002656	12
#58	0.0420	11/16"	1-5/8"	95002657	12
#59	0.0410	11/16"	1-5/8"	95002658	12
#60	0.0400	11/16"	1-5/8"	95002659	12

Drill bits from #1 to #52 are Split Point

JOBBER LENGTH



RMT

BLACK OXIDE 135°

Heavy Duty

MADE IN USA



- Industrial-Grade NAS High Speed Steel (HSS)
- Surface treated for corrosion resistance and increased lubricity
- Oil treated finish ideal for drilling in various types of metals
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low and medium carbon)
- Alloy Steel
- Stainless Steel

LETTER SIZES

LETTER SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
A	0.2340	2-5/8"	3-7/8"	95002700	12
B	0.2380	2-3/4"	4"	95002701	12
C	0.2420	2-3/4"	4"	95002702	12
D	0.2460	2-3/4"	4"	95002703	12
E	0.2500	2-3/4"	4"	95002704	12
F	0.2570	2-7/8"	4-1/8"	95002705	12
G	0.2610	2-7/8"	4-1/8"	95002706	12
H	0.2660	2-7/8"	4-1/8"	95002707	12
I	0.2720	2-7/8"	4-1/8"	95002708	12
J	0.2770	2-7/8"	4-1/8"	95002709	12
K	0.2810	2-15/16"	4-1/4"	95002710	12
L	0.2900	2-15/16"	4-1/4"	95002711	12
M	0.2950	3-1/16"	4-3/8"	95002712	12
N	0.3020	3-1/16"	4-3/8"	95002713	12
O	0.3160	3-3/16"	4-1/2"	95002714	6
P	0.3230	3-5/16"	4-5/8"	95002715	6
Q	0.3320	3-7/16"	4-3/4"	95002716	6
R	0.3390	3-7/16"	4-3/4"	95002717	6
S	0.3480	3-1/2"	4-7/8"	95002718	6
T	0.3580	3-1/2"	4-7/8"	95002719	6
U	0.3680	3-5/8"	5"	95002720	6
V	0.3770	3-5/8"	5"	95002721	6
W	0.3860	3-3/4"	5-1/8"	95002722	6
X	0.3970	3-3/4"	5-1/8"	95002723	6
Y	0.4040	3-7/8"	5-1/4"	95002724	6
Z	0.4130	3-7/8"	5-1/4"	95002725	6

JOBBER LENGTH



BLACK OXIDE 135°

Heavy Duty

MADE IN USA



- Industrial-Grade NAS High Speed Steel (HSS)
- Surface treated for corrosion resistance and increased lubricity
- Oil treated finish ideal for drilling in various types of metals
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION


- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low and medium carbon)
- Alloy Steel
- Stainless Steel

METRIC SIZES

METRIC SIZES MM	DECIMAL EQUIVALENT	FLUTE LENGTH INCHES	FLUTE LENGTH METRIC	OVERALL LENGTH INCHES	OVERALL LENGTH METRIC	PART NUMBER	SHIP QUANTITY
1.50	0.0591	7/8"	22	1-7/8"	48	95002329	12
2.00	0.0787	1"	25	2"	51	95002339	12
2.50	0.0984	1-3/8"	35	2-3/8"	60	95002349	12
3.00	0.1181	1-5/8"	41	2-3/4"	70	95002355	12
3.50	0.1378	1-3/4"	44	2-7/8"	73	95002361	12
4.00	0.1575	2-1/8"	54	3-1/4"	83	95002367	12
4.50	0.1772	2-3/16"	56	3-3/8"	86	95002373	12
5.00	0.1969	2-7/16"	62	3-5/8"	92	95002379	12
5.50	0.2165	2-1/2"	64	3-3/4"	95	95002385	12
6.00	0.2362	2-3/4"	70	4"	102	95002391	12
6.50	0.2559	2-7/8"	73	4-1/8"	105	95002397	12
7.00	0.2756	2-7/8"	73	4-1/8"	105	95002403	12
7.50	0.2953	3-1/16"	78	4-3/8"	111	95002409	12
8.00	0.3150	3-3/16"	81	4-1/2"	114	95002416	6
8.50	0.3346	3-7/16"	87	4-1/2"	121	95002422	6
9.00	0.3543	3-1/2"	89	4-7/8"	124	95002428	6
9.50	0.3740	3-5/8"	92	5"	127	95002434	6
10.00	0.3937	3-3/4"	95	5-1/8"	130	95002440	6
10.50	0.4134	3-7/8"	98	5-1/4"	133	95002442	6
11.00	0.4331	4-1/16"	103	5-1/2"	140	95002444	6
11.50	0.4528	4-3/16"	106	5-5/8"	143	95002446	6
12.00	0.4724	4-3/8"	111	5-7/8"	149	95002448	6
12.50	0.4921	4-1/2"	114	6"	152	95002450	6
13.00	0.5118	4-1/2"	114	6"	152	95002451	6

Drill bits from 2.5mm to 13.0mm are Split Point

JOBBER LENGTH

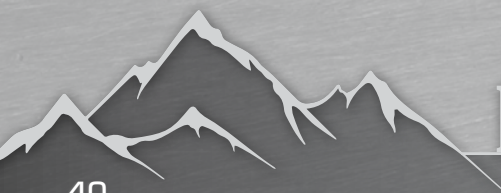

RMT

TITANIUM 135°

Heavy Duty

MADE IN USA



- Superior performance in high speed machining applications
- Precision Flute for faster, more efficient chip removal
- Hard surface with high lubricity extends tool life
- Industrial-Grade NAS High Speed Steel (HSS)
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Aluminum
- Cast Iron
- Copper Alloys
- Plastic
- Stainless Steel
- Alloy Steel
- Steel (low & medium carbon)
- Strength Alloys

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/16	0.0625	7/8"	1-7/8"	95000750	12
5/64	0.0781	1"	2"	95000751	12
3/32	0.0938	1-1/4"	2-1/4"	95000752	12
7/64	0.1094	1-1/2"	2-5/8"	95000753	12
1/8	0.1250	1-5/8"	2-3/4"	95000754	12
9/64	0.1406	1-3/4"	2-7/8"	95000755	12
5/32	0.1562	2"	3-1/8"	95000756	12
11/64	0.1719	2-1/8"	3-1/4"	95000757	12
3/16	0.1875	2-5/16"	3-1/2"	95000758	12
13/64	0.2031	2-7/16"	3-5/8"	95000759	12
7/32	0.2188	2-1/2"	3-3/4"	95000760	12
15/64	0.2344	2-5/8"	3-7/8"	95000761	12
1/4	0.2500	2-3/4"	4"	95000762	12
17/64	0.2656	2-7/8"	4-1/8"	95000763	12
9/32	0.2812	2-15/16"	4-1/4"	95000764	12
19/64	0.2969	3-1/16"	4-3/8"	95000765	12
5/16	0.3125	3-3/16"	4-1/2"	95000766	6
21/64	0.3281	3-5/16"	4-5/8"	95000767	6
11/32	0.3438	3-7/16"	4-3/4"	95000768	6
23/64	0.3594	3-1/2"	4-7/8"	95000769	6
3/8	0.3750	3-5/8"	5"	95000770	6
25/64	0.3906	3-3/4"	5-1/8"	95000771	6
13/32	0.40620	3-7/8"	5-1/4"	95000772	6
27/64	0.4219	3-15/16"	5-3/8"	95000773	6
7/16	0.4375	4-1/16"	5-1/2"	95000774	6
29/64	0.4531	4-3/16"	5-5/8"	95000775	6
15/32	0.4688	4-5/16"	5-3/4"	95000776	6
31/64	0.4844	4-3/8"	5-7/8"	95000777	6
1/2	0.5000	4-1/2"	6"	95000778	6

Drill bits from 7/64" to 1/2" are Split Point

JOBBER LENGTH

TITANIUM 135°

Heavy Duty

MADE IN USA



- Superior performance in high speed machining applications
- Precision Flute for faster, more efficient chip removal
- Hard surface with high lubricity extends tool life
- Industrial-Grade NAS High Speed Steel (HSS)
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Aluminum
- Cast Iron
- Copper Alloys
- Plastic
- Stainless Steel
- Alloy Steel
- Steel (low & medium carbon)
- Strength Alloys

WIRE SIZES

JOBBER LENGTH

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#1	0.2280	2-5/8"	3-7/8"	95003100	12
#2	0.2210	2-5/8"	3-7/8"	95003101	12
#3	0.2130	2-1/2"	3-3/4"	95003102	12
#4	0.2090	2-1/2"	3-3/4"	95003103	12
#5	0.2055	2-1/2"	3-3/4"	95003104	12
#6	0.2040	2-1/2"	3-3/4"	95003105	12
#7	0.2010	2-7/16"	3-5/8"	95003106	12
#8	0.1990	2-7/16"	3-5/8"	95003107	12
#9	0.1960	2-7/16"	3-5/8"	95003108	12
#10	0.1935	2-7/16"	3-5/8"	95003109	12
#11	0.1910	2-5/16"	3-1/2"	95003110	12
#12	0.1890	2-5/16"	3-1/2"	95003111	12
#13	0.1850	2-5/16"	3-1/2"	95003112	12
#14	0.1820	2-3/16"	3-3/8"	95003113	12
#15	0.1800	2-3/16"	3-3/8"	95003114	12
#16	0.1770	2-3/16"	3-3/8"	95003115	12
#17	0.1730	2-3/16"	3-3/8"	95003116	12
#18	0.1695	2-1/8"	3-1/4"	95003117	12
#19	0.1660	2-1/8"	3-1/4"	95003118	12
#20	0.1610	2-1/8"	3-1/4"	95003119	12
#21	0.1590	2-1/8"	3-1/4"	95003120	12
#22	0.1570	2"	3-1/8"	95003121	12
#23	0.1540	2"	3-1/8"	95003122	12
#24	0.1520	2"	3-1/8"	95003123	12
#25	0.1495	1-7/8"	3"	95003124	12
#26	0.1470	1-7/8"	3"	95003125	12
#27	0.1440	1-7/8"	3"	95003126	12
#28	0.1405	1-3/4"	2-7/8"	95003127	12
#29	0.1360	1-3/4"	2-7/8"	95003128	12
#30	0.1285	1-5/8"	2-3/4"	95003129	12

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#31	0.1200	1-5/8"	2-3/4"	95003130	12
#32	0.1160	1-5/8"	2-3/4"	95003131	12
#33	0.1130	1-1/2"	2-5/8"	95003132	12
#34	0.1110	1-1/2"	2-5/8"	95003133	12
#35	0.1100	1-1/2"	2-5/8"	95003134	12
#36	0.1065	1-7/16"	2-1/2"	95003135	12
#37	0.1040	1-7/16"	2-1/2"	95003136	12
#38	0.1015	1-7/16"	2-1/2"	95003137	12
#39	0.0995	1-3/8"	2-3/8"	95003138	12
#40	0.0980	1-3/8"	2-3/8"	95003139	12
#41	0.0960	1-3/8"	2-3/8"	95003140	12
#42	0.0935	1-1/4"	2-1/4"	95003141	12
#43	0.0890	1-1/4"	2-1/4"	95003142	12
#44	0.0860	1-1/8"	2-1/8"	95003143	12
#45	0.0820	1-1/8"	2-1/8"	95003144	12
#46	0.0810	1-1/8"	2-1/8"	95003145	12
#47	0.0785	1"	2"	95003146	12
#48	0.0760	1"	2"	95003147	12
#49	0.0730	1"	2"	95003148	12
#50	0.0700	1"	2"	95003149	12
#51	0.0670	1"	2"	95003150	12
#52	0.0635	7/8"	1-7/8"	95003151	12
#53	0.0595	7/8"	1-7/8"	95003152	12
#54	0.0550	7/8"	1-7/8"	95003153	12
#55	0.0520	7/8"	1-7/8"	95003154	12
#56	0.0465	3/4"	1-3/4"	95003155	12
#57	0.0430	3/4"	1-3/4"	95003156	12
#58	0.0420	11/16"	1-5/8"	95003157	12
#59	0.0410	11/16"	1-5/8"	95003158	12
#60	0.0400	11/16"	1-5/8"	95003159	12

Drill bits from #1 to #52 are Split Point



RMT

TITANIUM 135°

Heavy Duty

MADE IN USA



- Superior performance in high speed machining applications
- Precision Flute for faster, more efficient chip removal
- Hard surface with high lubricity extends tool life
- Industrial-Grade NAS High Speed Steel (HSS)
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Aluminum
- Cast Iron
- Copper Alloys
- Plastic
- Stainless Steel
- Alloy Steel
- Steel (low & medium carbon)
- Strength Alloys

LETTER SIZES

LETTER SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
A	0.2340	2-5/8"	3-7/8"	95003200	12
B	0.2380	2-3/4"	4"	95003201	12
C	0.2420	2-3/4"	4"	95003202	12
D	0.2460	2-3/4"	4"	95003203	12
E	0.2500	2-3/4"	4"	95003204	12
F	0.2570	2-7/8"	4-1/8"	95003205	12
G	0.2610	2-7/8"	4-1/8"	95003206	12
H	0.2660	2-7/8"	4-1/8"	95003207	12
I	0.2720	2-7/8"	4-1/8"	95003208	12
J	0.2770	2-7/8"	4-1/8"	95003209	12
K	0.2810	2-15/16"	4-1/4"	95003210	12
L	0.2900	2-15/16"	4-1/4"	95003211	12
M	0.2950	3-1/16"	4-3/8"	95003212	12
N	0.3020	3-1/16"	4-3/8"	95003213	12
O	0.3160	3-3/16"	4-1/2"	95003214	6
P	0.3230	3-5/16"	4-5/8"	95003215	6
Q	0.3320	3-7/16"	4-3/4"	95003216	6
R	0.3390	3-7/16"	4-3/4"	95003217	6
S	0.3480	3-1/2"	4-7/8"	95003218	6
T	0.3580	3-1/2"	4-7/8"	95003219	6
U	0.3680	3-5/8"	5"	95003220	6
V	0.3770	3-5/8"	5"	95003221	6
W	0.3860	3-3/4"	5-1/8"	95003222	6
X	0.3970	3-3/4"	5-1/8"	95003223	6
Y	0.4040	3-7/8"	5-1/4"	95003224	6
Z	0.4130	3-7/8"	5-1/4"	95003225	6

JOBBER LENGTH

BLACKGOLD™ 137°

Heavy Duty

MADE IN USA



- Thicker web prevents breakage for high load applications
- Split point tip penetrates surface on contact and prevents drill bit "walking"
- Stronger cutting lips reduce chipping for longer life
- Engineered to be stronger and more rigid than a standard 135°
- Industrial-Grade NAS High Speed Steel (HSS)



TRI-FLAT SHANK

MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low & medium carbon)
- Alloy Steel

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/16	.0625	3/4"	1-7/8"	95006000	12
5/64	.0781	7/8"	2"	95006001	12
3/32	.0938	1"	2-1/4"	95006002	12
7/64	.1094	1-1/4"	2-5/8"	95006003	12
1/8	.1250	1-1/4"	2-3/4"	95006004	12
9/64	.1406	1-3/8"	2-7/8"	95006005	12
5/32	.1562	1-5/8"	3-1/8"	95006006	12
11/64	.1719	1-5/8"	3-1/4"	95006007	12
3/16	.1875	1-3/4"	3-1/2"	95006008	12
13/64	.2031	1-7/8"	3-5/8"	95006009	12
7/32	.2188	2"	3-3/4"	95006010	12
15/64	.2344	2"	3-7/8"	95006011	12
1/4	.2500	2-1/8"	4"	95006012	12
17/64	.2656	2-1/4"	4-1/8"	95006013	12
9/32	.2812	2-1/4"	4-1/4"	95006014	12
19/64	.2969	2-3/8"	4-3/8"	95006015	12
5/16	.3125	2-1/2"	4-1/2"	95006016	6
21/64	.3281	2-1/2"	4-5/8"	95006017	6
11/32	.3438	2-5/8"	4-3/4"	95006018	6
23/64	.3594	2-3/4"	4-7/8"	95006019	6
3/8	.3750	2-3/4"	5"	95006020	6
25/64	.3906	2-7/8"	5-1/8"	95006021	6
13/32	.4062	3"	5-1/4"	95006022	6
27/64	.4219	3"	5-3/8"	95006023	6
7/16	.4375	3-1/8"	5-1/2"	95006024	6
29/64	.4531	3-1/4"	5-5/8"	95006025	6
15/32	.4688	3-1/4"	5-3/4"	95006026	6
31/64	.4844	3-3/8"	5-7/8"	95006027	6
1/2	.5000	3-1/2"	6"	95006028	6

Drill bits from 7/64" to 1/2" are Split Point
Tri-flat shank on drill bits 3/16" thru 1/2"

JOBBER LENGTH





- Thicker web prevents breakage for high load applications
- Split point tip penetrates surface on contact and prevents drill bit "walking"
- Stronger cutting lips reduce chipping for longer life
- Engineered to be stronger and more rigid than a standard 135°
- Industrial-Grade NAS High Speed Steel (HSS)



TRI-FLAT SHANK

MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low & medium carbon)
- Alloy Steel

WIRE SIZES

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#1	0.2280	2"	3-7/8"	95006100	12
#2	0.2210	2"	3-7/8"	95006101	12
#3	0.2130	1-7/8"	3-3/4"	95006102	12
#4	0.2090	1-7/8"	3-3/4"	95006103	12
#5	0.2055	1-7/8"	3-3/4"	95006104	12
#6	0.2040	1-7/8"	3-3/4"	95006105	12
#7	0.2010	1-7/8"	3-5/8"	95006106	12
#8	0.1990	1-7/8"	3-5/8"	95006107	12
#9	0.1960	1-7/8"	3-5/8"	95006108	12
#10	0.1935	1-7/8"	3-5/8"	95006109	12
#11	0.1910	1-7/8"	3-1/2"	95006110	12
#12	0.1890	1-3/4"	3-1/2"	95006111	12
#13	0.1850	1-3/4"	3-1/2"	95006112	12
#14	0.1820	1-3/4"	3-3/8"	95006113	12
#15	0.1800	1-3/4"	3-3/8"	95006114	12
#16	0.1770	1-3/4"	3-3/8"	95006115	12
#17	0.1730	1-5/8"	3-3/8"	95006116	12
#18	0.1695	1-5/8"	3-1/4"	95006117	12
#19	0.1660	1-5/8"	3-1/4"	95006118	12
#20	0.1610	1-5/8"	3-1/4"	95006119	12

Tri-flat shank on drill bits #1 thru #13

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#21	0.1590	1-5/8"	3-1/4"	95006120	12
#22	0.1570	1-5/8"	3-1/8"	95006121	12
#23	0.1540	1-1/2"	3-1/8"	95006122	12
#24	0.1520	1-1/2"	3-1/8"	95006123	12
#25	0.1495	1-1/2"	3"	95006124	12
#26	0.1470	1-1/2"	3"	95006125	12
#27	0.1440	1-3/8"	3"	95006126	12
#28	0.1405	1-3/8"	2-7/8"	95006127	12
#29	0.1360	1-3/8"	2-7/8"	95006128	12
#30	0.1285	1-1/4"	2-3/4"	95006129	12
#31	0.1200	1-1/4"	2-3/4"	95006130	12
#32	0.1160	1-1/4"	2-3/4"	95006131	12
#33	0.1130	1-1/4"	2-5/8"	95006132	12
#34	0.1110	1-1/4"	2-5/8"	95006133	12
#35	0.1100	1-1/4"	2-5/8"	95006134	12
#36	0.1065	1-1/8"	2-1/2"	95006135	12
#37	0.1040	1-1/8"	2-1/2"	95006136	12
#38	0.1015	1-1/8"	2-1/2"	95006137	12
#39	0.0995	1-1/8"	2-3/8"	95006138	12
#40	0.0980	1"	2-3/8"	95006139	12

JOBBER LENGTH

BLACKGOLD™ 137°

Heavy Duty

MADE IN USA



- Thicker web prevents breakage for high load applications
- Split point tip penetrates surface on contact and prevents drill bit "walking"
- Stronger cutting lips reduce chipping for longer life
- Engineered to be stronger and more rigid than a standard 135°
- Industrial-Grade NAS High Speed Steel (HSS)



TRI-FLAT SHANK


MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low & medium carbon)
- Alloy Steel

LETTER SIZES

LETTER SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
A	0.2340	2"	3-7/8"	95006200	12
B	0.2380	2"	4"	95006201	12
C	0.2420	2"	4"	95006202	12
D	0.2460	2"	4"	95006203	12
E	0.2500	2"	4"	95006204	12
F	0.2570	2-1/4"	4-1/8"	95006205	12
G	0.2610	2-1/4"	4-1/8"	95006206	12
H	0.2660	2-1/4"	4-1/8"	95006207	12
I	0.2720	2-1/4"	4-1/8"	95006208	12
J	0.2770	2-1/4"	4-1/8"	95006209	12
K	0.2810	2-1/4"	4-1/4"	95006210	12
L	0.2900	2-1/4"	4-1/4"	95006211	12
M	0.2950	2-3/8"	4-3/8"	95006212	12
N	0.3020	2-3/8"	4-3/8"	95006213	12
O	0.3160	2-3/8"	4-3/8"	95006214	6
P	0.3230	2-3/8"	4-5/8"	95006215	6
Q	0.3320	2-3/8"	4-3/4"	95006216	6
R	0.3390	2-3/8"	4-3/4"	95006217	6
S	0.3480	2-1/2"	4-7/8"	95006218	6
T	0.3580	2-1/2"	4-7/8"	95006219	6
U	0.3680	2-1/2"	5"	95006220	6
V	0.3770	2-1/2"	5"	95006221	6
W	0.3860	2-5/8"	5-1/8"	95006222	6
X	0.3970	2-5/8"	5-1/8"	95006223	6
Y	0.4040	3"	5-1/4"	95006224	6
Z	0.4130	3"	5-1/4"	95006225	6

JOBBER LENGTH

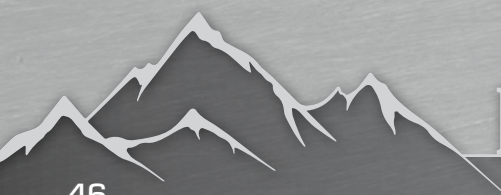


RMT

PARABOLIC BLACKGOLD™ 135°

Heavy Duty

MADE IN USA



- Heavy-duty web improves strength and structural stability
- Flatter web taper for more consistent chip evacuation
- 32° High helix enhances lift and reduces chip turbulence

- Parabolic, wide flutes for superior performance in deep-hole drilling
- Industrial-Grade NAS High Speed Steel (HSS)



MATERIAL APPLICATION

- Aluminum
- Brass
- Copper Alloys
- Plastic
- Steel (low & medium carbon)

FRACTIONAL & WIRE SIZES

FRACT. SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/16	0.0625	7/8"	1-7/8"	95004800	12
5/64	0.0781	1"	2"	95004801	12
3/32	0.0938	1-1/4"	2-1/4"	95004802	12
7/64	0.1094	1-1/2"	2-5/8"	95004803	12
1/8	0.1250	1-5/8"	2-3/4"	95004804	12
9/64	0.1406	1-3/4"	2-7/8"	95004805	12
5/32	0.1562	2"	3-1/8"	95004806	12
11/64	0.1719	2-1/8"	3-1/4"	95004807	12
3/16	0.1875	2-5/16"	3-1/2"	95004808	12
13/64	0.2031	2-7/16"	3-5/8"	95004809	12
7/32	0.2188	2-1/2"	3-3/4"	95004810	12
15/64	0.2344	2-5/8"	3-7/8"	95004811	12
1/4	0.2500	2-3/4"	4"	95004812	12
17/64	0.2656	2-7/8"	4-1/8"	95004813	12
9/32	0.2812	2-15/16"	4-1/4"	95004814	12
19/64	0.2969	3-1/16"	4-3/8"	95004815	12
5/16	0.3125	3-3/16"	4-1/2"	95004816	6
21/64	0.3281	3-5/16"	4-5/8"	95004817	6
11/32	0.3438	3-7/16"	4-3/4"	95004818	6

FRACT. SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
23/64	0.3594	3-1/2"	4-7/8"	95004819	6
3/8	0.3750	3-5/8"	5"	95004820	6
25/64	0.3906	3-3/4"	5-1/8"	95004821	6
13/32	0.4062	3-7/8"	5-1/4"	95004822	6
27/64	0.4219	3-15/16"	5-3/8"	95004823	6
7/16	0.4375	4-1/16"	5-1/2"	95004824	6
29/64	0.4531	4-3/16"	5-5/8"	95004825	6
15/32	0.4688	4-5/16"	5-3/4"	95004826	6
31/64	0.4844	4-3/8"	5-7/8"	95004827	6
1/2	0.5000	4-1/2"	6"	95004828	6

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#10	0.1935	1-7/8"	3-5/8"	95004910	12
#20	0.1610	1-5/8"	3-1/4"	95004920	12
#21	0.1590	1-5/8"	3-1/4"	95004921	12
#30	0.1285	1-1/4"	2-3/4"	95004930	12
#40	0.0980	1"	2-3/8"	95004940	12

Drill bits from 7/64" to 1/2" are Split Point

JOBBER LENGTH

COBALT 135°

Heavy Duty

MADE IN USA



- Produced from industrial-grade NAS Cobalt steel
- Superior red hardness for high temperature applications
- Less end load pressure required
- Split Point penetrates on contact and prevents "walking" of the bit




MATERIAL APPLICATION

- Cast Iron
- Alloy Steel
- Steel (low & medium carbon)
- Strength Alloys

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/16	0.0625	7/8"	1-7/8"	95004200	12
5/64	0.0781	1"	2"	95004201	12
3/32	0.0938	1-1/4"	2-1/4"	95004203	12
7/64	0.1094	1-1/2"	2-5/8"	95004204	12
1/8	0.1250	1-5/8"	2-3/4"	95004205	12
9/64	0.1406	1-3/4"	2-7/8"	95004206	12
5/32	0.1562	2"	3-1/8"	95004207	12
11/64	0.1719	2-1/8"	3-1/4"	95004208	12
3/16	0.1875	2-5/16"	3-1/2"	95004209	12
13/64	0.2031	2-7/16"	3-5/8"	95004210	12
7/32	0.2188	2-1/2"	3-3/4"	95004211	12
15/64	0.2344	2-5/8"	3-7/8"	95004212	12
1/4	0.2500	2-3/4"	4"	95004213	12
17/64	0.2656	2-7/8"	4-1/8"	95004214	12
9/32	0.2812	2-15/16"	4-1/4"	95004215	12
19/64	0.2969	3-1/16"	4-3/8"	95004216	12
5/16	0.3125	3-3/16"	4-1/2"	95004217	6
21/64	0.3281	3-5/16"	4-5/8"	95004218	6
11/32	0.3438	3-7/16"	4-3/4"	95004219	6
23/64	0.3594	3-1/2"	4-7/8"	95004220	6
3/8	0.3750	3-5/8"	5"	95004221	6
25/64	0.3906	3-3/4"	5-1/8"	95004222	6
13/32	0.4062	3-7/8"	5-1/4"	95004223	6
27/64	0.4219	3-15/16"	5-3/8"	95004224	6
7/16	0.4375	4-1/16"	5-1/2"	95004225	6
29/64	0.4531	4-3/16"	5-5/8"	95004226	6
15/32	0.4688	4-5/16"	5-3/4"	95004227	6
31/64	0.4844	4-3/8"	5-7/8"	95004228	6
1/2	0.5000	4-1/2"	6"	95004229	6

JOBBER LENGTH

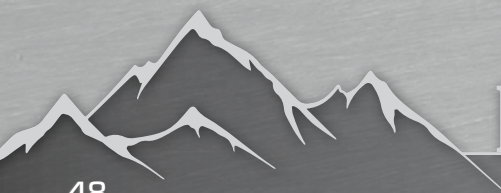

RMT

COBALT 135°

Heavy Duty

MADE IN USA



- Produced from industrial-grade NAS Cobalt steel
- Superior red hardness for high temperature applications
- Less end load pressure required
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Cast Iron
- Alloy Steel
- Steel (low & medium carbon)
- Strength Alloys

WIRE SIZES

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#1	0.2280	2-5/8"	3-7/8"	95004600	12
#2	0.2210	2-5/8"	3-7/8"	95004601	12
#3	0.2130	2-1/2"	3-3/4"	95004602	12
#4	0.2090	2-1/2"	3-3/4"	95004603	12
#5	0.2055	2-1/2"	3-3/4"	95004604	12
#6	0.2040	2-1/2"	3-3/4"	95004605	12
#7	0.2010	2-7/16"	3-5/8"	95004606	12
#8	0.1990	2-7/16"	3-5/8"	95004607	12
#9	0.1960	2-7/16"	3-5/8"	95004608	12
#10	0.1935	2-7/16"	3-5/8"	95004609	12
#11	0.1910	2-5/16"	3-1/2"	95004610	12
#12	0.1890	2-5/16"	3-1/2"	95004611	12
#13	0.1850	2-5/16"	3-1/2"	95004612	12
#14	0.1820	2-3/16"	3-3/8"	95004613	12
#15	0.1800	2-3/16"	3-3/8"	95004614	12
#16	0.1770	2-3/16"	3-3/8"	95004615	12
#17	0.1730	2-3/16"	3-3/8"	95004616	12
#18	0.1695	2-1/8"	3-1/4"	95004617	12
#19	0.1660	2-1/8"	3-1/4"	95004618	12
#20	0.1610	2-1/8"	3-1/4"	95004619	12
#21	0.1590	2-1/8"	3-1/4"	95004620	12
#22	0.1570	2"	3-1/8"	95004621	12
#23	0.1540	2"	3-1/8"	95004622	12
#24	0.1520	2"	3-1/8"	95004623	12
#25	0.1495	1-7/8"	3"	95004624	12
#26	0.1470	1-7/8"	3"	95004625	12
#27	0.1440	1-7/8"	3"	95004626	12
#28	0.1405	1-3/4"	2-7/8"	95004627	12
#29	0.1360	1-3/4"	2-7/8"	95004628	12
#30	0.1285	1-5/8"	2-3/4"	95004629	12

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#31	0.1200	1-5/8"	2-3/4"	95004630	12
#32	0.1160	1-5/8"	2-3/4"	95004631	12
#33	0.1130	1-1/2"	2-5/8"	95004632	12
#34	0.1110	1-1/2"	2-5/8"	95004633	12
#35	0.1100	1-1/2"	2-5/8"	95004634	12
#36	0.1065	1-7/16"	2-1/2"	95004635	12
#37	0.1040	1-7/16"	2-1/2"	95004636	12
#38	0.1015	1-7/16"	2-1/2"	95004637	12
#39	0.0995	1-3/8"	2-3/8"	95004638	12
#40	0.0980	1-3/8"	2-3/8"	95004639	12
#41	0.0960	1-3/8"	2-3/8"	95004640	12
#42	0.0935	1-1/4"	2-1/4"	95004641	12
#43	0.0890	1-1/4"	2-1/4"	95004642	12
#44	0.0860	1-1/8"	2-1/8"	95004643	12
#45	0.0820	1-1/8"	2-1/8"	95004644	12
#46	0.0810	1-1/8"	2-1/8"	95004645	12
#47	0.0785	1"	2"	95004646	12
#48	0.0760	1"	2"	95004647	12
#49	0.0730	1"	2"	95004648	12
#50	0.0700	1"	2"	95004649	12
#51	0.0670	1"	2"	95004650	12
#52	0.0635	7/8"	1-7/8"	95004651	12
#53	0.0595	7/8"	1-7/8"	95004652	12
#54	0.0550	7/8"	1-7/8"	95004653	12
#55	0.0520	7/8"	1-7/8"	95004654	12
#56	0.0465	3/4"	1-3/4"	95004655	12
#57	0.0430	3/4"	1-3/4"	95004656	12
#58	0.0420	11/16"	1-5/8"	95004657	12
#59	0.0410	11/16"	1-5/8"	95004658	12
#60	0.0400	11/16"	1-5/8"	95004659	12

Drill bits from #1 to #52 are Split Point

JOBBER LENGTH



COBALT 135°

Heavy Duty

MADE IN USA



- Produced from industrial-grade NAS Cobalt steel
- Superior red hardness for high temperature applications
- Less end load pressure required
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Cast Iron
- Alloy Steel
- Steel (low & medium carbon)
- Strength Alloys


LETTER SIZES

LETTER SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
A	0.2340	2-5/8"	3-7/8"	95006400	12
B	0.2380	2-3/4"	4"	95006401	12
C	0.2420	2-3/4"	4"	95006402	12
D	0.2460	2-3/4"	4"	95006403	12
E	0.2500	2-3/4"	4"	95006404	12
F	0.2570	2-7/8"	4-1/8"	95006405	12
G	0.2610	2-7/8"	4-1/8"	95006406	12
H	0.2660	2-7/8"	4-1/8"	95006407	12
I	0.2720	2-7/8"	4-1/8"	95006408	12
J	0.2770	2-7/8"	4-1/8"	95006409	12
K	0.2810	2-15/16"	4-1/4"	95006410	12
L	0.2900	2-15/16"	4-1/4"	95006411	12
M	0.2950	3-1/16"	4-3/8"	95006412	12
N	0.3020	3-1/16"	4-3/8"	95006413	12
O	0.3160	3-3/16"	4-1/2"	95006414	6
P	0.3230	3-5/16"	4-5/8"	95006415	6
Q	0.3320	3-7/16"	4-3/4"	95006416	6
R	0.3390	3-7/16"	4-3/4"	95006417	6
S	0.3480	3-1/2"	4-7/8"	95006418	6
T	0.3580	3-1/2"	4-7/8"	95006419	6
U	0.3680	3-5/8"	5"	95006420	6
V	0.3770	3-5/8"	5"	95006421	6
W	0.3860	3-3/4"	5-1/8"	95006422	6
X	0.3970	3-3/4"	5-1/8"	95006423	6
Y	0.4040	3-7/8"	5-1/4"	95006424	6
Z	0.4130	3-7/8"	5-1/4"	95006425	6

JOBBER LENGTH



RMT



- Extreme hardness and temperature resistance
- Working temperature up to 1200°C (2100°F)
- Extremely low friction coefficient
- Industrial-Grade NAS High Speed Steel (HSS)
- 135° Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Pre-Hard Alloy Steels
- Cast Iron
- Nickel Super Alloys
- Stainless Steel
- Titanium

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/16	0.0625	7/8"	1-7/8"	95009600	12
5/64	0.0781	1"	2"	95009601	12
3/32	0.0938	1-1/4"	2-1/4"	95009602	12
7/64	0.1094	1-1/2"	2-5/8"	95009603	12
1/8	0.1250	1-5/8"	2-3/4"	95009604	12
9/64	0.1406	1-3/4"	2-7/8"	95009605	12
5/32	0.1562	2"	3-1/8"	95009606	12
11/64	0.1719	2-1/8"	3-1/4"	95009607	12
3/16	0.1875	2-5/16"	3-1/2"	95009608	12
13/64	0.2031	2-7/16"	3-5/8"	95009609	12
7/32	0.2188	2-1/2"	3-3/4"	95009610	12
15/64	0.2344	2-5/8"	3-7/8"	95009611	12
1/4	0.2500	2-3/4"	4"	95009612	12
17/64	0.2656	2-7/8"	4-1/8"	95009613	12
9/32	0.2812	2-15/16"	4-1/4"	95009614	12
19/64	0.2969	3-1/16"	4-3/8"	95009615	12
5/16	0.3125	3-3/16"	4-1/2"	95009616	6
21/64	0.3281	3-5/16"	4-5/8"	95009617	6
11/32	0.3438	3-7/16"	4-3/4"	95009618	6
23/64	0.3594	3-1/2"	4-7/8"	95009619	6
3/8	0.3750	3-5/8"	5"	95009620	6
25/64	0.3906	3-3/4"	5-1/8"	95009621	6
13/32	0.4062	3-7/8"	5-1/4"	95009622	6
27/64	0.4219	3-15/16"	5-3/8"	95009623	6
7/16	0.4375	4-1/16"	5-1/2"	95009624	6
29/64	0.4531	4-3/16"	5-5/8"	95009625	6
15/32	0.4688	4-5/16"	5-3/4"	95009626	6
31/64	0.4844	4-3/8"	5-7/8"	95009627	6
1/2	0.5000	4-1/2"	6"	95009628	6

Contact us for more nACo coating options

JOBBER LENGTH

COBALT 127°-XP

Heavy Duty

MADE IN USA



MATERIAL APPLICATION

- Stainless Steel
- Titanium


- Exclusively engineered with specific design and cutting characteristics to deliver premium performance and results
- Improve penetration speed
- TiAlN Coated
- Reduce thrust load
- Increase productivity



FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/16	0.0625	7/8"	1-7/8"	95006800	12
5/64	0.0781	1"	2"	95006801	12
3/32	0.0938	1-1/4"	2-1/4"	95006802	12
7/64	0.1094	1-1/2"	2-5/8"	95006803	12
1/8	0.1250	1-5/8"	2-3/4"	95006804	12
9/64	0.1406	1-3/4"	2-7/8"	95006805	12
5/32	0.1562	2"	3-1/8"	95006806	12
11/64	0.1719	2-1/8"	3-1/4"	95006807	12
3/16	0.1875	2-5/16"	3-1/2"	95006808	12
13/64	0.2031	2-7/16"	3-5/8"	95006809	12
7/32	0.2188	2-1/2"	3-3/4"	95006810	12
15/64	0.2344	2-5/8"	3-7/8"	95006811	12
1/4	0.2500	2-3/4"	4"	95006812	12
17/64	0.2656	2-7/8"	4-1/8"	95006813	12
9/32	0.2812	2-15/16"	4-1/4"	95006814	12
19/64	0.2969	3-1/16"	4-3/8"	95006815	12
5/16	0.3125	3-3/16"	4-1/2"	95006816	6
21/64	0.3281	3-5/16"	4-5/8"	95006817	6
11/32	0.3438	3-7/16"	4-3/4"	95006818	6
23/64	0.3594	3-1/2"	4-7/8"	95006819	6
3/8	0.3750	3-5/8"	5"	95006820	6
25/64	0.3906	3-3/4"	5-1/8"	95006821	6
13/32	0.4062	3-7/8"	5-1/4"	95006822	6
27/64	0.4219	3-15/16"	5-3/8"	95006823	6
7/16	0.4375	4-1/16"	5-1/2"	95006824	6
29/64	0.4531	4-3/16"	5-5/8"	95006825	6
15/32	0.4688	4-5/16"	5-3/4"	95006826	6
31/64	0.4844	4-3/8"	5-7/8"	95006827	6
1/2	0.5000	4-1/2"	6"	95006828	6

JOBBER LENGTH

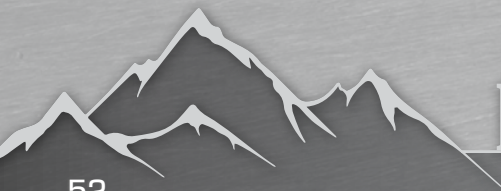

RMT

BRIGHT 118°

General Purpose

MADE IN USA



- Reduced shank for use with any chuck 3/8" diameter or larger
- Industrial-Grade NAS High Speed Steel (HSS)
- Excellent general use drill bit
- Flutes are precision ground for faster, more efficient chip removal



REDUCED SHANK

MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Plastic
- Wood
- Steel (low & medium carbon)

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
25/64	0.3906	3-3/4"	5-1/8"	95000580	6
13/32	0.4062	3-7/8"	5-1/4"	95000581	6
27/64	0.4219	3-15/16"	5-3/8"	95000582	6
7/16	0.4375	4-1/16"	5-1/2"	95000583	6
29/64	0.4531	4-3/16"	5-5/8"	95000584	6
15/32	0.4688	4-5/16"	5-3/4"	95000585	6
31/64	0.4844	4-3/8"	5-7/8"	95000586	6
1/2	0.5000	4-1/2"	6"	95000587	6

JOBBER LENGTH

BLACK OXIDE 135°

Heavy Duty

MADE IN USA



- Reduced shank for use with any chuck 3/8" diameter or larger
- Industrial-Grade NAS High Speed Steel (HSS)
- Surface treated for corrosion resistance and increased lubricity
- Oil treated finish ideal for drilling in various types of metals
- Split Point penetrates on contact and prevents "walking" of the bit



REDUCED SHANK


MATERIAL APPLICATION

- Cast Iron
- Alloy Steel

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
25/64	.3906	3-3/4"	5-1/8"	95000630	6
13/32	.4062	3-7/8"	5-1/4"	95000631	6
27/64	.4219	3-15/16"	5-3/8"	95000632	6
7/16	.4375	4-1/16"	5-1/2"	95000633	6
29/64	.4531	4-3/16"	5-5/8"	95000634	6
15/32	.4688	4-5/16"	5-3/4"	95000635	6
31/64	.4844	4-3/8"	5-7/8"	95000636	6
1/2	.5000	4-1/2"	6"	95000637	6

JOBBER LENGTH

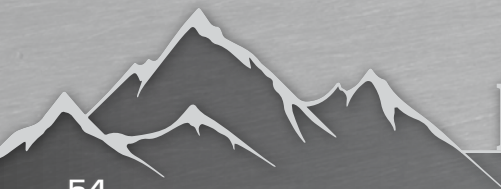

RMT

BLACKGOLD™ 135°

General Purpose

MADE IN USA



- Perfect for maintenance tasks where space is limited
- Tri-Flat shank provides secure drill chuck grip that eliminates bit spin out
- Penetrates material surface on contact preventing drill bit "skating"
- Industrial-Grade NAS High Speed Steel (HSS)



TRI-FLAT SHANK

MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Steel (low & medium carbon)
- Stainless Steel

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/16	0.0625	21/32"	1-7/8"	95008700	12
5/64	0.0781	3/4"	2"	95008701	12
3/32	0.0938	15/16"	2-1/4"	95008702	12
7/64	0.1094	1-1/8"	2-3/8"	95008703	12
1/8	0.1250	1-7/32"	2-1/2"	95008704	12
9/64	0.1406	1-5/16"	2-5/8"	95008705	12
5/32	0.1562	1-1/2"	2-3/4"	95008706	12
11/64	0.1719	1-19/32"	2-7/8"	95008707	12
3/16	0.1875	1-47/64"	3"	95008708	12
13/64	0.2031	1-53/64"	3-1/8"	95008709	12
7/32	0.2188	1-7/8"	3-1/4"	95008710	12
15/64	0.2344	1-31/32"	3-3/8"	95008711	12
1/4	0.2500	2-1/16"	3-1/2"	95008712	12
17/64	0.2656	2-5/32"	3-5/8"	95008713	12
9/32	0.2812	2-13/64"	3-3/4"	95008714	12
19/64	0.2969	2-19/64"	3-7/8"	95008715	12
5/16	0.3125	2-25/64"	4"	95008716	12
21/64	0.3281	2-31/64"	4-1/16"	95008717	6
11/32	0.3438	2-37/64"	4-1/8"	95008718	6
23/64	0.3594	2-5/8"	4-3/16"	95008719	6
3/8	0.3750	2-23/32"	4-1/4"	95008720	6
25/64	0.3906	2-13/16"	4-5/16"	95008721	6
13/32	0.4062	2-29/32"	4-3/8"	95008722	6
27/64	0.4219	2-61/64"	4-7/16"	95008723	6
7/16	0.4375	3-3/64"	4-1/2"	95008724	6
29/64	0.4531	3-9/64"	4-5/8"	95008725	6
15/32	0.4688	3-15/64"	4-3/4"	95008726	6
31/64	0.4844	3-9/32"	4-7/8"	95008727	6
1/2	0.5000	3-3/8"	5"	95008728	6

Tri-flat shank on drill bits 3/16" thru 1/2"

MAINTENANCE LENGTH

BRIGHT BRAD POINT

X29

MADE IN USA



- Excellent for drilling in wood and a broad range of plastics - including acrylic
- Dihedral point geometry engineered to drill extremely fast and clean
- Unrivaled hole accuracy and quality from entry to exit
- Task specific flutes designed for optimal chip evacuation
- Generates minimal heat and material burn
- Industrial-Grade High Speed Steel (HSS)



**TRI-FLAT
REDUCED SHANK**

MATERIAL APPLICATION

- Plastics (including acrylic)
- Thin Sheet Metal
- Wood

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/8	0.1250	1-7/32"	2-1/2"	95006504	12
3/16	0.1875	1-47/64"	3"	95006508	12
1/4	0.2500	2-1/16"	3-1/2"	95006512	12
5/16	0.3125	2-25/64"	4"	95006516	6
3/8	0.3750	2-23/32"	4-1/4"	95006520	6
7/16	0.4375	3-3/64"	4-1/2"	95006524	6
1/2	0.5000	3-3/8"	5"	95006528	6

Tri-flat shank on drill bits 3/16" thru 1/2"

MAINTENANCE LENGTH




RMT

BRIGHT 135°

Heavy Duty

MADE IN USA



- Excellent general use drill bit
- Flutes are precision ground for faster, more efficient chip removal
- Industrial-Grade NAS High Speed Steel (HSS)
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Alloy Steel

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/16	0.0625	5/8"	1-5/8"	95002900	12
5/64	0.0781	11/16"	1-11/16"	95002901	12
3/32	0.0938	3/4"	1-3/4"	95002902	12
7/64	0.1094	13/16"	1-13/16"	95002903	12
1/8	0.1250	7/8"	1-7/8"	95002904	12
9/64	0.1406	15/16"	1-15/16"	95002905	12
5/32	0.1562	1"	2-1/16"	95002906	12
11/64	0.1719	1-1/16"	2-1/8"	95002907	12
3/16	0.1875	1-1/8"	2-3/16"	95002908	12
13/64	0.2031	1-3/16"	2-1/4"	95002909	12
7/32	0.2188	1-1/4"	2-3/8"	95002910	12
15/64	0.2344	1-5/16"	2-7/16"	95002911	12
1/4	0.2500	1-3/8"	2-1/2"	95002912	12
17/64	0.2656	1-7/16"	2-5/8"	95002913	12
9/32	0.2812	1-1/2"	2-11/16"	95002914	12
19/64	0.2969	1-9/16"	2-3/4"	95002915	12
5/16	0.3125	1-5/8"	2-13/16"	95002916	6
21/64	0.3281	1-11/16"	2-15/16"	95002917	6
11/32	0.3438	1-11/16"	3"	95002918	6
23/64	0.3594	1-3/4"	3-1/16"	95002919	6
3/8	0.3750	1-13/16"	3-1/8"	95002920	6
25/64	0.3906	1-7/8"	3-1/4"	95002921	6
13/32	0.4062	1-15/16"	3-5/16"	95002922	6
27/64	0.4219	2"	3-3/8"	95002923	6
7/16	0.4375	2-1/16"	3-7/16"	95002924	6
29/64	0.4531	2-1/8"	3-9/16"	95002925	6
15/32	0.4688	2-1/8"	3-5/8"	95002926	6
31/64	0.4844	2-3/16"	3-11/16"	95002927	6
1/2	0.5000	2-1/4"	3-3/4"	95002928	6


Drill bits from 7/64" to 1/2" are Split Point

SCREW MACHINE

BRIGHT 135°

Heavy Duty

MADE IN USA



- Excellent general use drill bit
- Flutes are precision ground for faster, more efficient chip removal
- Industrial-Grade NAS High Speed Steel (HSS)
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Alloy Steel

WIRE SIZES

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#1	0.2280	1-5/16"	2-7/16"	95002801	12
#2	0.2210	1-5/16"	2-7/16"	95002802	12
#3	0.2130	1-1/4"	2-3/8"	95002803	12
#4	0.2090	1-1/4"	2-3/8"	95002804	12
#5	0.2055	1-1/4"	2-3/8"	95002805	12
#6	0.2040	1-1/4"	2-3/8"	95002806	12
#7	0.2010	1-3/16"	2-1/4"	95002807	12
#8	0.1990	1-3/16"	2-1/4"	95002808	12
#9	0.1960	1-3/16"	2-1/4"	95002809	12
#10	0.1935	1-3/16"	2-1/4"	95002810	12
#11	0.1910	1-3/16"	2-1/4"	95002811	12
#12	0.1890	1-3/16"	2-1/4"	95002812	12
#13	0.1850	1-1/8"	2-3/16"	95002813	12
#14	0.1820	1-1/8"	2-3/16"	95002814	12
#15	0.1800	1-1/8"	2-3/16"	95002815	12
#16	0.1770	1-1/8"	2-3/16"	95002816	12
#17	0.1730	1-1/8"	2-3/16"	95002817	12
#18	0.1695	1-1/16"	2-1/8"	95002818	12
#19	0.1660	1-1/16"	2-1/8"	95002819	12
#20	0.1610	1-1/16"	2-1/8"	95002820	12
#21	0.1590	1-1/16"	2-1/8"	95002821	12
#22	0.1570	1-1/16"	2-1/8"	95002822	12
#23	0.1540	1"	2-1/16"	95002823	12
#24	0.1520	1"	2-1/16"	95002824	12
#25	0.1495	1"	2-1/16"	95002825	12
#26	0.1470	1"	2-1/16"	95002826	12
#27	0.1440	1"	2-1/16"	95002827	12
#28	0.1405	15/16"	1-15/16"	95002828	12
#29	0.1360	15/16"	1-15/16"	95002829	12
#30	0.1285	15/16"	1-15/16"	95002830	12

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#31	0.1200	7/8"	1-7/8"	95002831	12
#32	0.1160	7/8"	1-7/8"	95002832	12
#33	0.1130	7/8"	1-7/8"	95002833	12
#34	0.1110	7/8"	1-7/8"	95002834	12
#35	0.1100	7/8"	1-7/8"	95002835	12
#36	0.1065	13/16"	1-13/16"	95002836	12
#37	0.1040	13/16"	1-13/16"	95002837	12
#38	0.1015	13/16"	1-13/16"	95002838	12
#39	0.0995	13/16"	1-13/16"	95002839	12
#40	0.0980	13/16"	1-13/16"	95002840	12
#41	0.0960	13/16"	1-13/16"	95002841	12
#42	0.0935	3/4"	1-3/4"	95002842	12
#43	0.0890	3/4"	1-3/4"	95002843	12
#44	0.0860	3/4"	1-3/4"	95002844	12
#45	0.0820	3/4"	1-3/4"	95002845	12
#46	0.0810	3/4"	1-3/4"	95002846	12
#47	0.0785	11/16"	1-11/16"	95002847	12
#48	0.0760	11/16"	1-11/16"	95002848	12
#49	0.0730	11/16"	1-11/16"	95002849	12
#50	0.0700	11/16"	1-11/16"	95002850	12
#51	0.0670	11/16"	1-11/16"	95002851	12
#52	0.0635	11/16"	1-11/16"	95002852	12
#53	0.0595	5/8"	1-5/8"	95002853	12
#54	0.0550	5/8"	1-5/8"	95002854	12
#55	0.0520	5/8"	1-5/8"	95002855	12
#56	0.0465	1/2"	1-3/8"	95002856	12
#57	0.0430	1/2"	1-3/8"	95002857	12
#58	0.0420	1/2"	1-3/8"	95002858	12
#59	0.0410	1/2"	1-3/8"	95002859	12
#60	0.0400	1/2"	1-3/8"	95002860	12

Drill bits from #1 to #52 are Split Point


SCREW MACHINE



BRIGHT 135°

Heavy Duty

MADE IN USA



- Excellent general use drill bit
- Flutes are precision ground for faster, more efficient chip removal
- Industrial-Grade NAS High Speed Steel (HSS)
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Alloy Steel

LETTER SIZES


LETTER SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
A	0.2340	1-5/16"	2-7/16"	95003000	12
B	0.2380	1-3/8"	2-1/2"	95003001	12
C	0.2420	1-3/8"	2-1/2"	95003002	12
D	0.2460	1-3/8"	2-1/2"	95003003	12
E	0.2500	1-3/8"	2-1/2"	95003004	12
F	0.2570	1-7/16"	2-5/8"	95003005	12
G	0.2610	1-7/16"	2-5/8"	95003006	12
H	0.2660	1-1/2"	2-11/16"	95003007	12
I	0.2720	1-1/2"	2-11/16"	95003008	12
J	0.2770	1-1/2"	2-11/16"	95003009	12
K	0.2810	1-1/2"	2-11/16"	95003010	12
L	0.2900	1-9/16"	2-3/4"	95003011	12
M	0.2950	1-9/16"	2-3/4"	95003012	12
N	0.3020	1-5/8"	2-13/16"	95003013	12
O	0.3160	1-11/16"	2-15/16"	95003014	6
P	0.3230	1-11/16"	2-15/16"	95003015	6
Q	0.3320	1-11/16"	3"	95003016	6
R	0.3390	1-11/16"	3"	95003017	6
S	0.3480	1-3/4"	3-1/16"	95003018	6
T	0.3580	1-3/4"	3-1/16"	95003019	6
U	0.3680	1-13/16"	3-1/8"	95003020	6
V	0.3770	1-7/8"	3-1/4"	95003021	6
W	0.3860	1-7/8"	3-1/4"	95003022	6
X	0.3970	1-15/16"	3-5/16"	95003023	6
Y	0.4040	1-15/16"	3-5/16"	95003024	6
Z	0.4130	2"	3-3/8"	95003025	6

SCREW MACHINE

BLACK OXIDE 135°

Heavy Duty

MADE IN USA



- Industrial-Grade NAS High Speed Steel (HSS)
- Surface treated for corrosion resistance and increased lubricity
- Oil treated finish ideal for drilling in various types of metals
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION


- Aluminum
- Copper Alloys
- Wood
- Plastic
- Alloy Steel

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/16	0.0625	5/8"	1-5/8"	95001860	12
5/64	0.0781	11/16"	1-11/16"	95001861	12
3/32	0.0938	3/4"	1-3/4"	95001862	12
7/64	0.1094	13/16"	1-13/16"	95001863	12
1/8	0.1250	7/8"	1-7/8"	95001864	12
9/64	0.1406	15/16"	1-15/16"	95001865	12
5/32	0.1562	1"	2-1/16"	95001866	12
11/64	0.1719	1-1/16"	2-1/8"	95001867	12
3/16	0.1875	1-1/8"	2-3/16"	95001868	12
13/64	0.2031	1-3/16"	2-1/4"	95001869	12
7/32	0.2188	1-1/4"	2-3/8"	95001870	12
15/64	0.2344	1-5/16"	2-7/16"	95001871	12
1/4	0.2500	1-3/8"	2-1/2"	95001872	12
17/64	0.2656	1-7/16"	2-5/8"	95001873	12
9/32	0.2812	1-1/2"	2-11/16"	95001874	12
19/64	0.2969	1-9/16"	2-3/4"	95001875	12
5/16	0.3125	1-5/8"	2-13/16"	95001876	6
21/64	0.3281	1-11/16"	2-15/16"	95001877	6
11/32	0.3438	1-11/16"	3"	95001878	6
23/64	0.3594	1-3/4"	3-1/16"	95001879	6
3/8	0.3750	1-13/16"	3-1/8"	95001880	6
25/64	0.3906	1-7/8"	3-1/4"	95001881	6
13/32	0.4062	1-15/16"	3-5/16"	95001882	6
27/64	0.4219	2"	3-3/8"	95001883	6
7/16	0.4375	2-1/16"	3-7/16"	95001884	6
29/64	0.4531	2-1/8"	3-9/16"	95001885	6
15/32	0.4688	2-1/8"	3-5/8"	95001886	6
31/64	0.4844	2-3/16"	3-11/16"	95001887	6
1/2	0.5000	2-1/4"	3-3/4"	95001888	6

Drill bits from 7/64" to 1/2" are Split Point

SCREW MACHINE

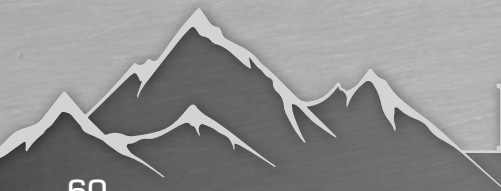

RMT

BLACK OXIDE 135°

Heavy Duty

MADE IN USA



- Industrial-Grade NAS High Speed Steel (HSS)
- Surface treated for corrosion resistance and increased lubricity
- Oil treated finish ideal for drilling in various types of metals
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Alloy Steel

WIRE SIZES

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#1	0.2280	1-5/16"	2-7/16"	95001800	12
#2	0.2210	1-5/16"	2-7/16"	95001801	12
#3	0.2130	1-1/4"	2-3/8"	95001802	12
#4	0.2090	1-1/4"	2-3/8"	95001803	12
#5	0.2055	1-1/4"	2-3/8"	95001804	12
#6	0.2040	1-1/4"	2-3/8"	95001805	12
#7	0.2010	1-3/16"	2-1/4"	95001806	12
#8	0.1990	1-3/16"	2-1/4"	95001807	12
#9	0.1960	1-3/16"	2-1/4"	95001808	12
#10	0.1935	1-3/16"	2-1/4"	95001809	12
#11	0.1910	1-3/16"	2-1/4"	95001810	12
#12	0.1890	1-3/16"	2-1/4"	95001811	12
#13	0.1850	1-1/8"	2-3/16"	95001812	12
#14	0.1820	1-1/8"	2-3/16"	95001813	12
#15	0.1800	1-1/8"	2-3/16"	95001814	12
#16	0.1770	1-1/8"	2-3/16"	95001815	12
#17	0.1730	1-1/8"	2-3/16"	95001816	12
#18	0.1695	1-1/16"	2-1/8"	95001817	12
#19	0.1660	1-1/16"	2-1/8"	95001818	12
#20	0.1610	1-1/16"	2-1/8"	95001819	12
#21	0.1590	1-1/16"	2-1/8"	95001820	12
#22	0.1570	1-1/16"	2-1/8"	95001821	12
#23	0.1540	1"	2-1/16"	95001822	12
#24	0.1520	1"	2-1/16"	95001823	12
#25	0.1495	1"	2-1/16"	95001824	12
#26	0.1470	1"	2-1/16"	95001825	12
#27	0.1440	1"	2-1/16"	95001826	12
#28	0.1405	15/16"	1-15/16"	95001827	12
#29	0.1360	15/16"	1-15/16"	95001828	12
#30	0.1285	15/16"	1-15/16"	95001829	12

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#31	0.1200	7/8"	1-7/8"	95001830	12
#32	0.1160	7/8"	1-7/8"	95001831	12
#33	0.1130	7/8"	1-7/8"	95001832	12
#34	0.1110	7/8"	1-7/8"	95001833	12
#35	0.1100	7/8"	1-7/8"	95001834	12
#36	0.1065	13/16"	1-13/16"	95001835	12
#37	0.1040	13/16"	1-13/16"	95001836	12
#38	0.1015	13/16"	1-13/16"	95001837	12
#39	0.0995	13/16"	1-13/16"	95001838	12
#40	0.0980	13/16"	1-13/16"	95001839	12
#41	0.0960	13/16"	1-13/16"	95001840	12
#42	0.0935	3/4"	1-3/4"	95001841	12
#43	0.0890	3/4"	1-3/4"	95001842	12
#44	0.0860	3/4"	1-3/4"	95001843	12
#45	0.0820	3/4"	1-3/4"	95001844	12
#46	0.0810	3/4"	1-3/4"	95001845	12
#47	0.0785	11/16"	1-11/16"	95001846	12
#48	0.0760	11/16"	1-11/16"	95001847	12
#49	0.0730	11/16"	1-11/16"	95001848	12
#50	0.0700	11/16"	1-11/16"	95001849	12
#51	0.0670	11/16"	1-11/16"	95001850	12
#52	0.0635	11/16"	1-11/16"	95001851	12
#53	0.0595	5/8"	1-5/8"	95001852	12
#54	0.0550	5/8"	1-5/8"	95001853	12
#55	0.0520	5/8"	1-5/8"	95001854	12
#56	0.0465	1/2"	1-3/8"	95001855	12
#57	0.0430	1/2"	1-3/8"	95001856	12
#58	0.0420	1/2"	1-3/8"	95001857	12
#59	0.0410	1/2"	1-3/8"	95001858	12
#60	0.0400	1/2"	1-3/8"	95001859	12

Drill bits from #1 to #52 are Split Point


SCREW MACHINE



BLACK OXIDE 135°

Heavy Duty

MADE IN USA



- Industrial-Grade NAS High Speed Steel (HSS)
- Surface treated for corrosion resistance and increased lubricity
- Oil treated finish ideal for drilling in various types of metals
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Wood
- Plastic
- Alloy Steel

LETTER SIZES

LETTER SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
A	0.2340	1-5/16"	2-7/16"	95006450	12
B	0.2380	1-3/8"	2-1/2"	95006451	12
C	0.2420	1-3/8"	2-1/2"	95006452	12
D	0.2460	1-3/8"	2-1/2"	95006453	12
E	0.2500	1-3/8"	2-1/2"	95006454	12
F	0.2570	1-7/16"	2-5/8"	95006455	12
G	0.2610	1-7/16"	2-5/8"	95006456	12
H	0.2660	1-1/2"	2-11/16"	95006457	12
I	0.2720	1-1/2"	2-11/16"	95006458	12
J	0.2770	1-1/2"	2-11/16"	95006459	12
K	0.2810	1-1/2"	2-11/16"	95006460	12
L	0.2900	1-9/16"	2-3/4"	95006461	12
M	0.2950	1-9/16"	2-3/4"	95006462	12
N	0.3020	1-5/8"	2-13/16"	95006463	12
O	0.3160	1-11/16"	2-15/16"	95006464	6
P	0.3230	1-11/16"	2-15/16"	95006465	6
Q	0.3320	1-11/16"	3"	95006466	6
R	0.3390	1-11/16"	3"	95006467	6
S	0.3480	1-3/4"	3-1/16"	95006468	6
T	0.3580	1-3/4"	3-1/16"	95006469	6
U	0.3680	1-13/16"	3-1/8"	95006470	6
V	0.3770	1-7/8"	3-1/4"	95006471	6
W	0.3860	1-7/8"	3-1/4"	95006472	6
X	0.3970	1-15/16"	3-5/16"	95006473	6
Y	0.4040	1-15/16"	3-5/16"	95006474	6
Z	0.4130	2"	3-3/8"	95006475	6

SCREW MACHINE



RMT

COBALT 135°

Heavy Duty

MADE IN USA



- Produced from industrial-grade NAS Cobalt steel
- Superior red hardness for high temperature applications
- Less end load pressure required
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Steel (low and medium carbon)
- Alloy Steel
- Stainless Steel
- Strength Alloys
- Cast Iron

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/16	0.0625	5/8"	1-5/8"	95001746	12
5/64	0.0781	11/16"	1-11/16"	95001747	12
3/32	0.0938	3/4"	1-3/4"	95001748	12
7/64	0.1094	13/16"	1-13/16"	95001749	12
1/8	0.1250	7/8"	1-7/8"	95001750	12
9/64	0.1406	15/16"	1-15/16"	95001763	12
5/32	0.1562	1"	2-1/16"	95001751	12
11/64	0.1719	1-1/16"	2-1/8"	95001764	12
3/16	0.1875	1-1/8"	2-3/16"	95001752	12
13/64	0.2031	1-3/16"	2-1/4"	95001765	12
7/32	0.2188	1-1/4"	2-3/8"	95001753	12
15/64	0.2344	1-5/16"	2-7/16"	95001766	12
1/4	0.2500	1-3/8"	2-1/2"	95001754	12
17/64	0.2656	1-7/16"	2-5/8"	95001767	12
9/32	0.2812	1-1/2"	2-11/16"	95001755	12
19/64	0.2969	1-9/16"	2-3/4"	95001768	12
5/16	0.3125	1-5/8"	2-13/16"	95001756	6
21/64	0.3281	1-11/16"	2-15/16"	95001769	6
11/32	0.3438	1-11/16"	3"	95001757	6
23/64	0.3594	1-3/4"	3-1/16"	95001770	6
3/8	0.3750	1-13/16"	3-1/8"	95001758	6
25/64	0.3906	1-7/8"	3-1/4"	95001771	6
13/32	0.4062	1-15/16"	3-5/16"	95001759	6
27/64	0.4219	2"	3-3/8"	95001772	6
7/16	0.4375	2-1/16"	3-7/16"	95001760	6
29/64	0.4531	2-1/8"	3-9/16"	95001773	6
15/32	0.4688	2-1/8"	3-5/8"	95001761	6
31/64	0.4844	2-3/16"	3-11/16"	95001774	6
1/2	0.5000	2-1/4"	3-3/4"	95001762	6

SCREW MACHINE

COBALT 135°

Heavy Duty

MADE IN USA



- Produced from industrial-grade NAS Cobalt steel
- Superior red hardness for high temperature applications
- Less end load pressure required
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Steel (low and medium carbon)
- Alloy Steel
- Stainless Steel
- Strength Alloys
- Cast Iron

WIRE SIZES

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#1	0.2280	1-5/16"	2-7/16"	95006300	12
#2	0.2210	1-5/16"	2-7/16"	95006301	12
#3	0.2130	1-1/4"	2-3/8"	95006302	12
#4	0.2090	1-1/4"	2-3/8"	95006303	12
#5	0.2055	1-1/4"	2-3/8"	95006304	12
#6	0.2040	1-1/4"	2-3/8"	95006305	12
#7	0.2010	1-3/16"	2-1/4"	95006306	12
#8	0.1990	1-3/16"	2-1/4"	95006307	12
#9	0.1960	1-3/16"	2-1/4"	95006308	12
#10	0.1935	1-3/16"	2-1/4"	95006309	12
#11	0.1910	1-3/16"	2-1/4"	95006310	12
#12	0.1890	1-3/16"	2-1/4"	95006311	12
#13	0.1850	1-1/8"	2-3/16"	95006312	12
#14	0.1820	1-1/8"	2-3/16"	95006313	12
#15	0.1800	1-1/8"	2-3/16"	95006314	12
#16	0.1770	1-1/8"	2-3/16"	95006315	12
#17	0.1730	1-1/8"	2-3/16"	95006316	12
#18	0.1695	1-1/16"	2-1/8"	95006317	12
#19	0.1660	1-1/16"	2-1/8"	95006318	12
#20	0.1610	1-1/16"	2-1/8"	95006319	12
#21	0.1590	1-1/16"	2-1/8"	95006320	12
#22	0.1570	1-1/16"	2-1/8"	95006321	12
#23	0.1540	1"	2-1/16"	95006322	12
#24	0.1520	1"	2-1/16"	95006323	12
#25	0.1495	1"	2-1/16"	95006324	12
#26	0.1470	1"	2-1/16"	95006325	12
#27	0.1440	1"	2-1/16"	95006326	12
#28	0.1405	15/16"	1-15/16"	95006327	12
#29	0.1360	15/16"	1-15/16"	95006328	12
#30	0.1285	15/16"	1-15/16"	95006329	12

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#31	0.1200	7/8"	1-7/8"	95006330	12
#32	0.1160	7/8"	1-7/8"	95006331	12
#33	0.1130	7/8"	1-7/8"	95006332	12
#34	0.1110	7/8"	1-7/8"	95006333	12
#35	0.1100	7/8"	1-7/8"	95006334	12
#36	0.1065	13/16"	1-13/16"	95006335	12
#37	0.1040	13/16"	1-13/16"	95006336	12
#38	0.1015	13/16"	1-13/16"	95006337	12
#39	0.0995	13/16"	1-13/16"	95006338	12
#40	0.0980	13/16"	1-13/16"	95006339	12
#41	0.0960	13/16"	1-13/16"	95006340	12
#42	0.0935	3/4"	1-3/4"	95006341	12
#43	0.0890	3/4"	1-3/4"	95006342	12
#44	0.0860	3/4"	1-3/4"	95006343	12
#45	0.0820	3/4"	1-3/4"	95006344	12
#46	0.0810	3/4"	1-3/4"	95006345	12
#47	0.0785	11/16"	1-11/16"	95006346	12
#48	0.0760	11/16"	1-11/16"	95006347	12
#49	0.0730	11/16"	1-11/16"	95006348	12
#50	0.0700	11/16"	1-11/16"	95006349	12
#51	0.0670	11/16"	1-11/16"	95006376	12
#52	0.0635	11/16"	1-11/16"	95006377	12
#53	0.0595	5/8"	1-5/8"	95006378	12
#54	0.0550	5/8"	1-5/8"	95006379	12
#55	0.0520	5/8"	1-5/8"	95006380	12
#56	0.0465	1/2"	1-3/8"	95006381	12
#57	0.0430	1/2"	1-3/8"	95006382	12
#58	0.0420	1/2"	1-3/8"	95006383	12
#59	0.0410	1/2"	1-3/8"	95006384	12
#60	0.0400	1/2"	1-3/8"	95006385	12

Drill bits from #1 to #52 are Split Point

SCREW MACHINE



RMT

COBALT 135°

Heavy Duty

MADE IN USA



- Produced from industrial-grade NAS Cobalt steel
- Superior red hardness for high temperature applications
- Less end load pressure required
- Split Point penetrates on contact and prevents "walking" of the bit



MATERIAL APPLICATION

- Steel (low and medium carbon)
- Alloy Steel
- Stainless Steel
- Strength Alloys
- Cast Iron

LETTER SIZES

LETTER SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
A	0.2340	1-5/16"	2-7/16"	95006350	12
B	0.2380	1-3/8"	2-1/2"	95006351	12
C	0.2420	1-3/8"	2-1/2"	95006352	12
D	0.2460	1-3/8"	2-1/2"	95006353	12
E	0.2500	1-3/8"	2-1/2"	95006354	12
F	0.2570	1-7/16"	2-5/8"	95006355	12
G	0.2610	1-7/16"	2-5/8"	95006356	12
H	0.2660	1-1/2"	2-11/16"	95006357	12
I	0.2720	1-1/2"	2-11/16"	95006358	12
J	0.2770	1-1/2"	2-11/16"	95006359	12
K	0.2810	1-1/2"	2-11/16"	95006360	12
L	0.2900	1-9/16"	2-3/4"	95006361	12
M	0.2950	1-9/16"	2-3/4"	95006362	12
N	0.3020	1-5/8"	2-13/16"	95006363	12
O	0.3160	1-11/16"	2-15/16"	95006364	6
P	0.3230	1-11/16"	2-15/16"	95006365	6
Q	0.3320	1-11/16"	3"	95006366	6
R	0.3390	1-11/16"	3"	95006367	6
S	0.3480	1-3/4"	3-1/16"	95006368	6
T	0.3580	1-3/4"	3-1/16"	95006369	6
U	0.3680	1-13/16"	3-1/8"	95006370	6
V	0.3770	1-7/8"	3-1/4"	95006371	6
W	0.3860	1-7/8"	3-1/4"	95006372	6
X	0.3970	1-15/16"	3-5/16"	95006373	6
Y	0.4040	1-15/16"	3-5/16"	95006374	6
Z	0.4130	2"	3-3/8"	95006375	6

SCREW MACHINE

COBALT 127°-XP

Heavy Duty

MADE IN USA



- Exclusively engineered with specific design and cutting characteristics to deliver premium performance and results
- Improve penetration speed
- TIALN coated
- Reduce thrust load
- Increase productivity




MATERIAL APPLICATION

- Stainless Steel
- Titanium

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
1/16	0.0625	5/8"	1-5/8"	95007000	12
5/64	0.0781	11/16"	1-11/16"	95007001	12
3/32	0.0938	3/4"	1-3/4"	95007002	12
7/64	0.1094	13/16"	1-13/16"	95007003	12
1/8	0.1250	7/8"	1-7/8"	95007004	12
9/64	0.1406	15/16"	1-15/16"	95007005	12
5/32	0.1562	1"	2-1/16"	95007006	12
11/64	0.1719	1-1/16"	2-1/8"	95007007	12
3/16	0.1875	1-1/8"	2-3/16"	95007008	12
13/64	0.2031	1-3/16"	2-1/4"	95007009	12
7/32	0.2188	1-1/4"	2-3/8"	95007010	12
15/64	0.2344	1-5/16"	2-7/16"	95007011	12
1/4	0.2500	1-3/8"	2-1/2"	95007012	12
17/64	0.2656	1-7/16"	2-5/8"	95007013	12
9/32	0.2812	1-1/2"	2-11/16"	95007014	12
19/64	0.2969	1-9/16"	2-3/4"	95007015	12
5/16	0.3125	1-5/8"	2-13/16"	95007016	6
21/64	0.3281	1-11/16"	2-15/16"	95007017	6
11/32	0.3438	1-11/16"	3"	95007018	6
23/64	0.3594	1-3/4"	3-1/16"	95007019	6
3/8	0.3750	1-13/16"	3-1/8"	95007020	6
25/64	0.3906	1-7/8"	3-1/4"	95007021	6
13/32	0.4062	1-15/16"	3-5/16"	95007022	6
27/64	0.4219	2"	3-3/8"	95007023	6
7/16	0.4375	2-1/16"	3-7/16"	95007024	6
29/64	0.4531	2-1/8"	3-9/16"	95007025	6
15/32	0.4688	2-1/8"	3-5/8"	95007026	6
31/64	0.4844	2-3/16"	3-11/16"	95007027	6
1/2	0.5000	2-1/4"	3-3/4"	95007028	6

SCREW MACHINE

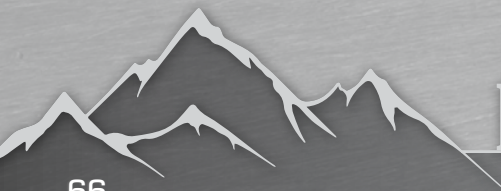

RMT

COBALT 127°-XP

Heavy Duty

MADE IN USA



- Exclusively engineered with specific design and cutting characteristics to deliver premium performance and results
- Improve penetration speed
- TiAlN coated
- Reduce thrust load
- Increase productivity



MATERIAL APPLICATION

- Stainless Steel
- Titanium

WIRE SIZES

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#1	0.2280	1-5/16"	2-7/16"	95007100	12
#2	0.2210	1-5/16"	2-7/16"	95007101	12
#3	0.2130	1-1/4"	2-3/8"	95007102	12
#4	0.2090	1-1/4"	2-3/8"	95007103	12
#5	0.2055	1-1/4"	2-3/8"	95007104	12
#6	0.2040	1-1/4"	2-3/8"	95007105	12
#7	0.2010	1-3/16"	2-1/4"	95007106	12
#8	0.1990	1-3/16"	2-1/4"	95007107	12
#9	0.1960	1-3/16"	2-1/4"	95007108	12
#10	0.1935	1-3/16"	2-1/4"	95007109	12
#11	0.1910	1-3/16"	2-1/4"	95007110	12
#12	0.1890	1-3/16"	2-1/4"	95007111	12
#13	0.1850	1-1/8"	2-3/16"	95007112	12
#14	0.1820	1-1/8"	2-3/16"	95007113	12
#15	0.1800	1-1/8"	2-3/16"	95007114	12
#16	0.1770	1-1/8"	2-3/16"	95007115	12
#17	0.1730	1-1/8"	2-3/16"	95007116	12
#18	0.1695	1-1/16"	2-1/8"	95007117	12
#19	0.1660	1-1/16"	2-1/8"	95007118	12
#20	0.1610	1-1/16"	2-1/8"	95007119	12
#21	0.1590	1-1/16"	2-1/8"	95007120	12
#22	0.1570	1-1/16"	2-1/8"	95007121	12
#23	0.1540	1"	2-1/16"	95007122	12
#24	0.1520	1"	2-1/16"	95007123	12
#25	0.1495	1"	2-1/16"	95007124	12
#26	0.1470	1"	2-1/16"	95007125	12
#27	0.1440	1"	2-1/16"	95007126	12
#28	0.1405	15/16"	1-15/16"	95007127	12
#29	0.1360	15/16"	1-15/16"	95007128	12
#30	0.1285	15/16"	1-15/16"	95007129	12

WIRE SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
#31	0.1200	7/8"	1-7/8"	95007130	12
#32	0.1160	7/8"	1-7/8"	95007131	12
#33	0.1130	7/8"	1-7/8"	95007132	12
#34	0.1110	7/8"	1-7/8"	95007133	12
#35	0.1100	7/8"	1-7/8"	95007134	12
#36	0.1065	13/16"	1-13/16"	95007135	12
#37	0.1040	13/16"	1-13/16"	95007136	12
#38	0.1015	13/16"	1-13/16"	95007137	12
#39	0.0995	13/16"	1-13/16"	95007138	12
#40	0.0980	13/16"	1-13/16"	95007139	12
#41	0.0960	13/16"	1-13/16"	95007140	12
#42	0.0935	3/4"	1-3/4"	95007141	12
#43	0.0890	3/4"	1-3/4"	95007142	12
#44	0.0860	3/4"	1-3/4"	95007143	12
#45	0.0820	3/4"	1-3/4"	95007144	12
#46	0.0810	3/4"	1-3/4"	95007145	12
#47	0.0785	11/16"	1-11/16"	95007146	12
#48	0.0760	11/16"	1-11/16"	95007147	12
#49	0.0730	11/16"	1-11/16"	95007148	12
#50	0.0700	11/16"	1-11/16"	95007149	12
#51	0.0670	11/16"	1-11/16"	95007150	12
#52	0.0635	11/16"	1-11/16"	95007151	12

SCREW MACHINE

COBALT 127°-XP

Heavy Duty

MADE IN USA



- Designed to deliver premium performance in work-hardening alloys
- Improve penetration speed
- TIALN coated
- Reduce thrust load
- Increase productivity




MATERIAL APPLICATION

- Stainless Steel
- Titanium

LETTER SIZES

LETTER SIZES	DECIMAL EQUIVALENT	FLUTE LENGTH	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
A	0.2340	1-5/16"	2-7/16"	95007050	12
B	0.2380	1-3/8"	2-1/2"	95007051	12
C	0.2420	1-3/8"	2-1/2"	95007052	12
D	0.2460	1-3/8"	2-1/2"	95007053	12
E	0.2500	1-3/8"	2-1/2"	95007054	12
F	0.2570	1-7/16"	2-5/8"	95007055	12
G	0.2610	1-7/16"	2-5/8"	95007056	12
H	0.2660	1-1/2"	2-11/16"	95007057	12
I	0.2720	1-1/2"	2-11/16"	95007058	12
J	0.2770	1-1/2"	2-11/16"	95007059	12
K	0.2810	1-1/2"	2-11/16"	95007060	12
L	0.2900	1-9/16"	2-3/4"	95007061	12
M	0.2950	1-9/16"	2-3/4"	95007062	12
N	0.3020	1-5/8"	2-13/16"	95007063	12
O	0.3160	1-11/16"	2-15/16"	95007064	6
P	0.3230	1-11/16"	2-15/16"	95007065	6
Q	0.3320	1-11/16"	3"	95007066	6
R	0.3390	1-11/16"	3"	95007067	6
S	0.3480	1-3/4"	3-1/16"	95007068	6
T	0.3580	1-3/4"	3-1/16"	95007069	6
U	0.3680	1-13/16"	3-1/8"	95007070	6
V	0.3770	1-7/8"	3-1/4"	95007071	6
W	0.3860	1-7/8"	3-1/4"	95007072	6
X	0.3970	1-15/16"	3-5/16"	95007073	6
Y	0.4040	1-15/16"	3-5/16"	95007074	6
Z	0.4130	2"	3-3/8"	95007075	6

SCREW MACHINE

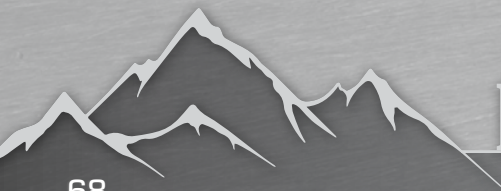

RMT


13 PIECE SETS

Jobber Length

MADE IN USA

- Rugged metal carrying case
- Tip-out storage indexes
- Numbered indexes help keep bits organized

Material Application-details on page 5

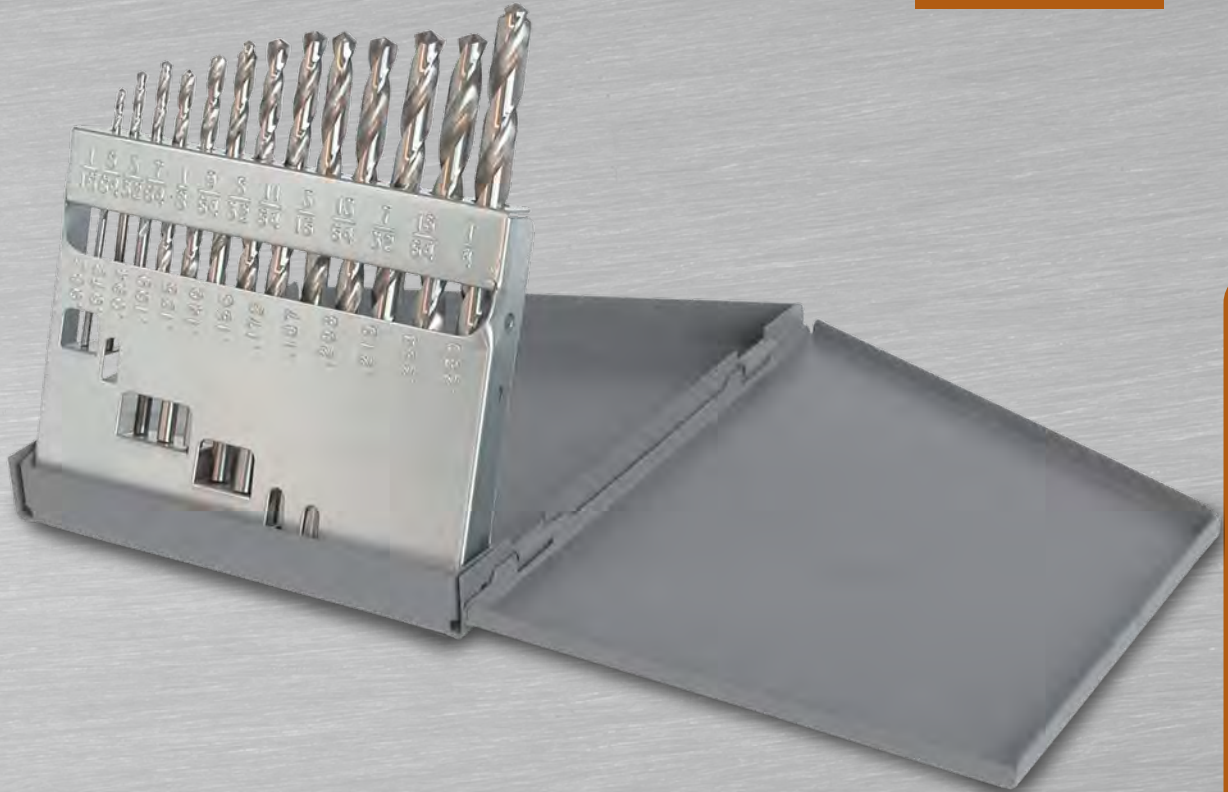

AVAILABLE IN

- Bright
- Black Oxide
- Titanium
- Cobalt
- BlackGold™

DRILL SETS

FRACTIONAL SIZE SETS

JOBBER LENGTH

PIECE COUNT	SIZE RANGE	DRILL BIT FINISH	POINT GEOMETRY	CASE DIMENSIONS	PART NUMBER
13	1/16" to 1/4"	Bright	118° Point	5-1/4"H x 4-1/16"W x 1/2"D	95090800
13	1/16" to 1/4"	Black Oxide	118° Point	5-1/4"H x 4-1/16"W x 1/2"D	95090801
13	1/16" to 1/4"	Black Oxide	135° Split Point *	5-1/4"H x 4-1/16"W x 1/2"D	95090802
13	1/16" to 1/4"	Titanium	135° Split Point *	5-1/4"H x 4-1/16"W x 1/2"D	95090803
13	1/16" to 1/4"	Cobalt	135° Split Point	5-1/4"H x 4-1/16"W x 1/2"D	95090870
13	1/16" to 1/4"	BlackGold™	137° Split Point *	5-1/4"H x 4-1/16"W x 1/2"D	95090804

*Drill bits from 7/64" to 1/4" are Split Point



15 PIECE SETS


Jobber Length

MADE IN USA

- Rugged metal carrying case
 - Tip-out storage indexes
 - Numbered indexes help keep bits organized
- Material Application-details on page 5

AVAILABLE IN

- Bright
- Black Oxide
- Titanium
- Cobalt
- BlackGold™

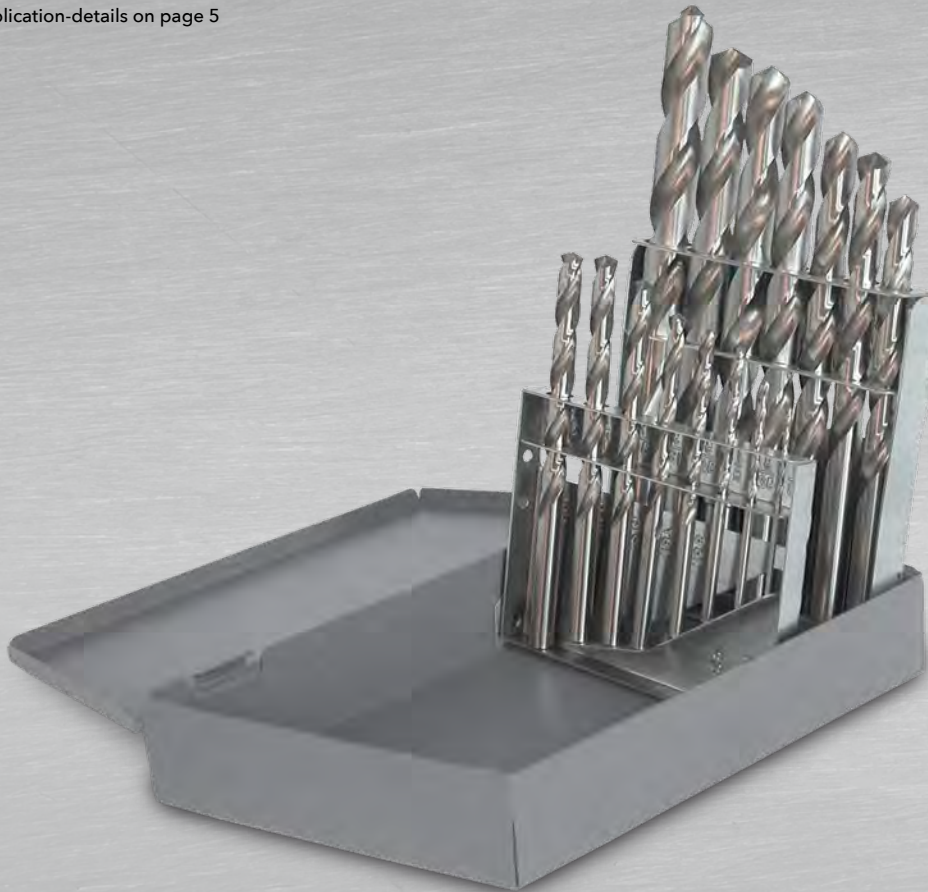


DRILL SETS

FRACTIONAL SIZE SETS

JOBBER LENGTH

PIECE COUNT	SIZE RANGE	DRILL BIT FINISH	POINT GEOMETRY	CASE DIMENSIONS	PART NUMBER
15	1/16" to 1/2"	Bright	118° Point	7-1/16"H x 4-1/8"W x 1-1/4"D	95090810
15	1/16" to 1/2"	Black Oxide	118° Point	7-1/16"H x 4-1/8"W x 1-1/4"D	95090811
15	1/16" to 1/2"	Black Oxide	135° Split Point *	7-1/16"H x 4-1/8"W x 1-1/4"D	95090812
15	1/16" to 1/2"	Titanium	135° Split Point *	7-1/16"H x 4-1/8"W x 1-1/4"D	95090813
15	1/16" to 1/2"	Cobalt	135° Split Point	7-1/16"H x 4-1/8"W x 1-1/4"D	95090871
15	1/16" to 1/2"	BlackGold™	137° Split Point *	7-1/16"H x 4-1/8"W x 1-1/4"D	95090814
15	1/16" to 1/2"	Rocky Mountain Blue	135° Split Point	7-1/16"H x 4-1/8"W x 1-1/4"D	95090815

*Drill bits from 7/64" to 1/2" are Split Point

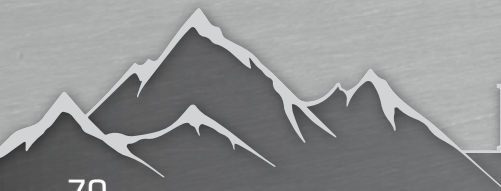

RMT

21 PIECE SETS

Jobber Length


MADE IN USA

- Rugged metal carrying case
 - Tip-out storage indexes
 - Numbered indexes help keep bits organized
- Material Application-details on page 5



AVAILABLE IN

- Bright
- Black Oxide
- Titanium
- Cobalt
- BlackGold™

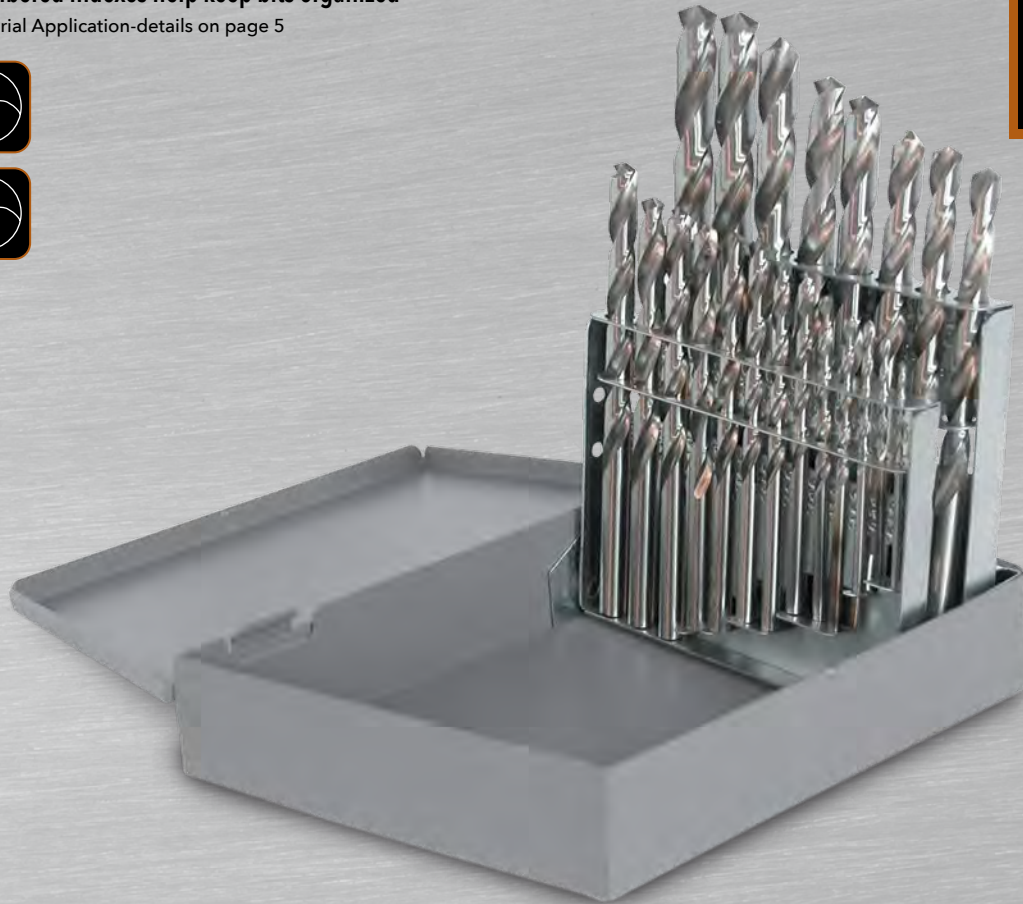

DRILL SETS

FRACTIONAL SIZE SETS

JOBBER LENGTH

PIECE COUNT	SIZE RANGE	DRILL BIT FINISH	POINT GEOMETRY	CASE DIMENSIONS	PART NUMBER
21	1/16" to 3/8"	Bright	118° Point	6"H x 4-1/8"W x 1-1/8"D	95090820
21	1/16" to 3/8"	Black Oxide	118° Point	6"H x 4-1/8"W x 1-1/8"D	95090821
21	1/16" to 3/8"	Black Oxide	135° Split Point *	6"H x 4-1/8"W x 1-1/8"D	95090822
21	1/16" to 3/8"	Titanium	135° Split Point *	6"H x 4-1/8"W x 1-1/8"D	95090823
21	1/16" to 3/8"	Cobalt	135° Split Point	6"H x 4-1/8"W x 1-1/8"D	95090872
21	1/16" to 3/8"	BlackGold™	137° Split Point *	6"H x 4-1/8"W x 1-1/8"D	95090824
21	1/16" to 3/8"	Rocky Mountain Blue	135° Split Point	6"H x 4-1/8"W x 1-1/8"D	95090825

*Drill bits from 7/64" to 3/8" are Split Point



26 PIECE SETS

Jobber & Screw Machine

MADE IN USA

- Rugged metal carrying case
 - Tip-out storage indexes
 - Numbered indexes help keep bits organized
- Material Application-details on pages 5-6



AVAILABLE IN

- Bright
- Black Oxide
- Cobalt
- BlackGold™



(Jobber length pictured)

LETTER SIZE SETS

JOBBER LENGTH

PIECE COUNT	SIZE RANGE	DRILL BIT FINISH	POINT GEOMETRY	CASE DIMENSIONS	PART NUMBER
26	Letter A-Z	Bright	118° Point	7-1/2"H x 4-3/8"W x 2-3/16"D	95090830
26	Letter A-Z	Black Oxide	135° Split Point	7-1/2"H x 4-3/8"W x 2-3/16"D	95090831
26	Letter A-Z	BlackGold™	137° Split Point	7-1/2"H x 4-3/8"W x 2-3/16"D	95090832
26	Letter A-Z	Cobalt	135° Split Point	7-1/2"H x 4-3/8"W x 2-3/16"D	95090873

SCREW MACHINE

PIECE COUNT	SIZE RANGE	DRILL BIT FINISH	POINT GEOMETRY	CASE DIMENSIONS	PART NUMBER
26	Letter A-Z	Black Oxide	135° Split Point	7-1/2"H x 4-3/8"W x 2-3/16"D	95090881
26	Letter A-Z	Cobalt	135° Split Point	7-1/2"H x 4-3/8"W x 2-3/16"D	95090879

DRILL SETS



RMT

29 PIECE SETS

Jobber

MADE IN USA

- Rugged metal carrying case
 - Tip-out storage indexes
 - Numbered indexes help keep bits organized
- Material Application-details on pages 5-6

- AVAILABLE IN
- Bright
 - Black Oxide
 - Titanium
 - Cobalt
 - BlackGold™
 - nAco



(Jobber length in metal index pictured)

(Jobber length in RMT index pictured)

FRACTIONAL SIZE SETS

JOBBER LENGTH

PIECE COUNT	SIZE RANGE	DRILL BIT FINISH	POINT GEOMETRY	CASE TYPE	CASE DIMENSIONS	PART NUMBER
29	1/16" to 1/2"	Bright	118° Point	Metal Index	7-1/16"H x 4-1/8"W x 1-13/16"D	95090840
29	1/16" to 1/2"	Black Oxide	118° Point	Metal Index	7-1/16"H x 4-1/8"W x 1-13/16"D	95090841
29	1/16" to 1/2"	Black Oxide	135° Split Point *	Metal Index	7-1/16"H x 4-1/8"W x 1-13/16"D	95090842
29	1/16" to 1/2"	Titanium	135° Split Point *	Metal Index	7-1/16"H x 4-1/8"W x 1-13/16"D	95090843
29	1/16" to 1/2"	Cobalt	135° Split Point	RMT Index	7-1/2"H x 5"W x 2-1/8"D	95090944
29	1/16" to 1/2"	BlackGold™	137° Split Point *	RMT Index	7-1/2"H x 5"W x 2-1/8"D	95090945
29	1/16" to 1/2"	nAco	135° Split Point	RMT Index	7-1/2"H x 5"W x 2-1/8"D	95090954

DRILL SETS



29 PIECE SETS


Screw Machine & Maintenance

MADE IN USA

- Rugged metal carrying case
 - Tip-out storage indexes
 - Numbered indexes help keep bits organized
- Material Application-details on pages 5-6

AVAILABLE IN

- Black Oxide
- Cobalt
- BlackGold™

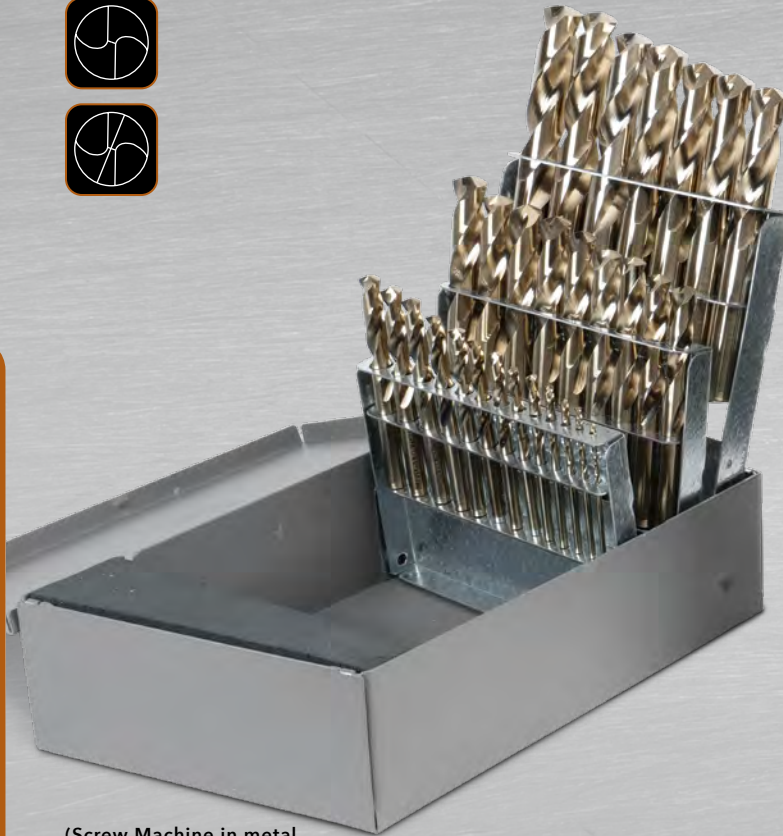

(Screw Machine in metal index pictured)



(Maintenance length in bullet index pictured)

DRILL SETS

FRACTIONAL SIZE SETS

SCREW MACHINE

PIECE COUNT	SIZE RANGE	DRILL BIT FINISH	POINT GEOMETRY	CASE TYPE	CASE DIMENSIONS	PART NUMBER
29	1/16" to 1/2"	Black Oxide	135° Split Point *	Metal Index	7-1/16"H x 4-1/8"W x 1-13/16"D	95090875
29	1/16" to 1/2"	Cobalt	135° Split Point	Metal Index	7-1/16"H x 4-1/8"W x 1-13/16"D	95090877

*Drill bits from 7/64" to 1/2" are Split Point

MAINTENANCE

PIECE COUNT	SIZE RANGE	DRILL BIT FINISH	POINT GEOMETRY	CASE TYPE	CASE DIMENSIONS	PART NUMBER
29	1/16" to 1/2"	BlackGold	135° Split Point	Bullet Index	6-1/2"H x 3-1/8"W x 3-1/8"D	95090960

*Drill bits from 7/64" to 1/2" are Split Point



RMT

60 PIECE SETS


Jobber & Screw Machine

MADE IN USA

- Rugged metal carrying case
 - Tip-out storage indexes
 - Numbered indexes help keep bits organized
- Material Application-details on pages 5-6

AVAILABLE IN

- Bright
- Black Oxide
- Titanium
- Cobalt

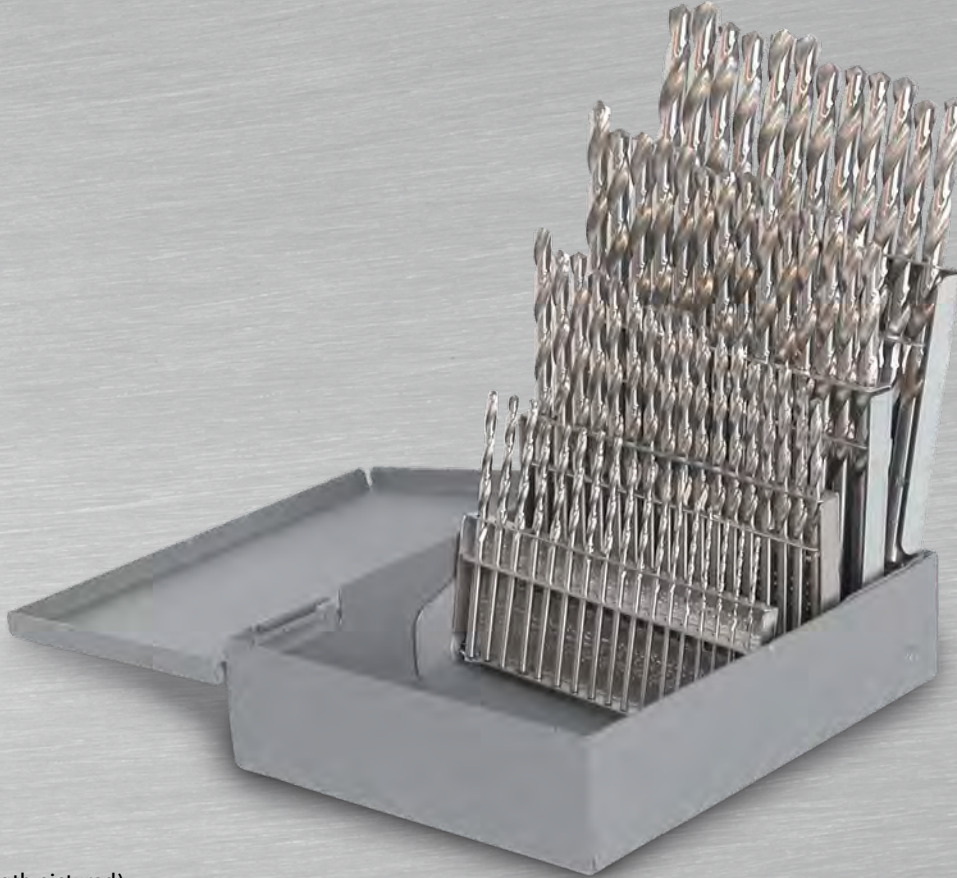

(Jobber length pictured)

WIRE SIZE SETS

JOBBER LENGTH

PIECE COUNT	SIZE RANGE	DRILL BIT FINISH	POINT GEOMETRY	CASE DIMENSIONS	PART NUMBER
60	Wire #1-#60	Bright	118° Point	4-9/16"H x 3-7/16"W x 1-1/8"D	95090850
60	Wire #1-#60	Black Oxide	135° Split Point *	4-9/16"H x 3-7/16"W x 1-1/8"D	95090851
60	Wire #1-#60	Titanium	135° Split Point *	4-9/16"H x 3-7/16"W x 1-1/8"D	95090852
60	Wire #1-#60	Cobalt	135° Split Point *	4-9/16"H x 3-7/16"W x 1-1/8"D	95090854

SCREW MACHINE

PIECE COUNT	SIZE RANGE	DRILL BIT FINISH	POINT GEOMETRY	CASE DIMENSIONS	PART NUMBER
60	Wire #1-#60	Black Oxide	135° Split Point *	4-9/16"H x 3-7/16"W x 1-1/8"D	95090876
60	Wire #1-#60	Cobalt	135° Split Point *	4-9/16"H x 3-7/16"W x 1-1/8"D	95090878

*Drill bits from #1 to #52 are Split Point

DRILL SETS



115 PIECE SETS


Jobber & Screw Machine

MADE IN USA

- Rugged metal carrying case
 - Tip-out storage indexes
 - Numbered indexes help keep bits organized
- Material Application-details on pages 5-6

AVAILABLE IN

- Bright
- Black Oxide
- Cobalt

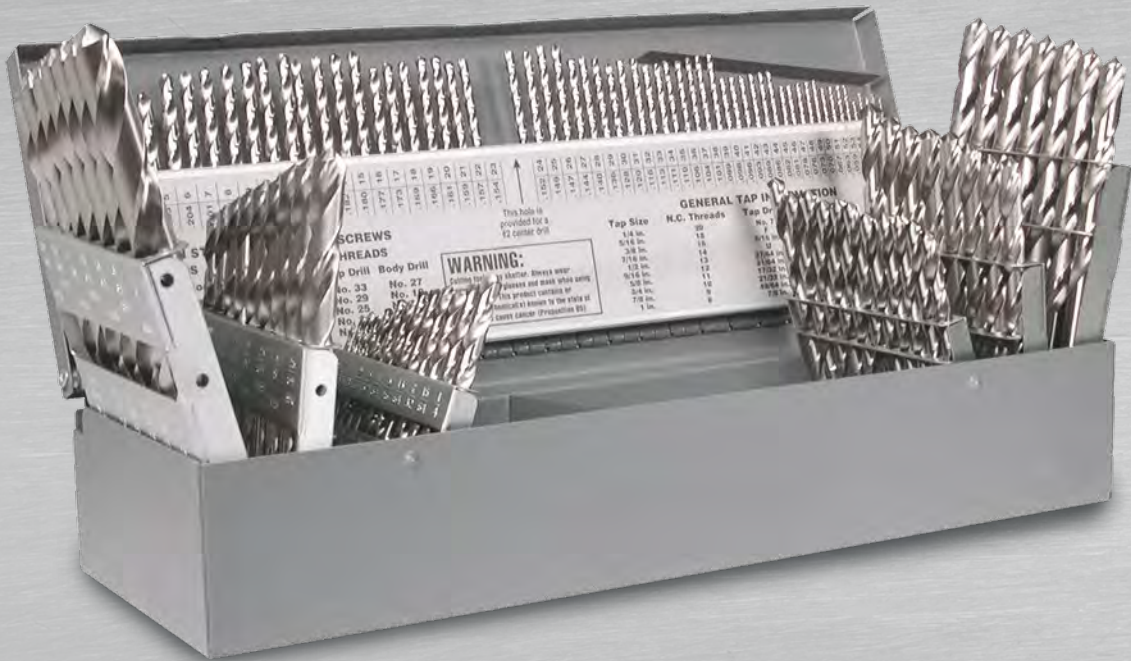

(Jobber length pictured)

COMBINATION SETS

JOBBER LENGTH


PIECE COUNT	SIZE RANGE	DRILL BIT FINISH	POINT GEOMETRY	CASE DIMENSIONS	PART NUMBER
115	1/16" to 1/2" & A-Z & #1-#60	Bright	118° Point	2-1/4"H x 4-5/8"W x 13-1/4"L	95090860
115	1/16" to 1/2" & A-Z & #1-#60	Black Oxide	135° Split Point **	2-1/4"H x 4-5/8"W x 13-1/4"L	95090861
115	1/16" to 1/2" & A-Z & #1-#60	Bright	135° Split Point **	2-1/4"H x 4-5/8"W x 13-1/4"L	95090862
115	1/16" to 1/2" & A-Z & #1-#60	Cobalt	135° Split Point *	2-1/4"H x 4-5/8"W x 13-1/4"L	95090874

SCREW MACHINE

PIECE COUNT	SIZE RANGE	DRILL BIT FINISH	POINT GEOMETRY	CASE DIMENSIONS	PART NUMBER
115	1/16" to 1/2" & A-Z & #1-#60	Black Oxide	135° Split Point **	2-1/4"H x 4-5/8"W x 13-1/4"L	95090882
115	1/16" to 1/2" & A-Z & #1-#60	Cobalt	135° Split Point *	2-1/4"H x 4-5/8"W x 13-1/4"L	95090880

*Drill bits from 7/64" to 1/2" are Split Point •Drill bits from #1 to #52 are Split Point

DRILL SETS

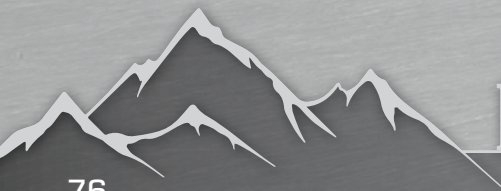

RMT

BLACK & SILVER 118°

General Purpose



- 1/2" Round Shank
- 3" Flute / 6" Overall Length
- Industrial-Grade AISI High Speed Steel
- Excellent general use drill bit
- Surface treated for corrosion resistance and increased lubricity
- Oil treated finish ideal for drilling in various types of metals



MATERIAL APPLICATION

- Aluminum
- Copper Alloys
- Mild Steel
- Plastic
- Sheet Metal
- Wood

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	PART NUMBER	SHIP QUANTITY
33/64	0.5156	95004750	1
17/32	0.5312	95005750	1
35/64	0.5468	95004751	1
9/16	0.5625	95005751	1
37/64	0.5781	95004752	1
19/32	0.5937	95005752	1
39/64	0.6093	95004753	1
5/8	0.6250	95005753	1
41/64	0.6406	95004754	1
21/32	0.6562	95005754	1
43/64	0.6718	95004755	1
11/16	0.6875	95005755	1
45/64	0.7031	95004756	1
23/32	0.7187	95005756	1
47/64	0.7343	95004757	1
3/4	0.7500	95005757	1

FRACTIONAL SIZES	DECIMAL EQUIVALENT	PART NUMBER	SHIP QUANTITY
49/64	0.7656	95004758	1
25/32	0.7812	95005758	1
51/64	0.7968	95004759	1
13/16	0.8125	95005759	1
53/64	0.8281	95004760	1
27/32	0.8437	95005760	1
55/64	0.8593	95004761	1
7/8	0.8750	95005761	1
57/64	0.8906	95004762	1
29/32	0.9062	95005762	1
59/64	0.9218	95004763	1
15/16	0.9375	95005763	1
61/64	0.9531	95004764	1
31/32	0.9687	95005764	1
63/64	0.9843	95004765	1
1	1.0000	95005765	1

COBALT 135°

General Purpose



- 1/2" Round Shank
- 3" Flute / 6" Overall Length
- Produced from industrial-grade AISI Cobalt steel (HSCO)
- Superior red hardness for high temperature applications
- Less end load pressure required



MATERIAL APPLICATION

- Aluminum
- Cast Iron
- Alloy Steel

FRACTIONAL SIZES

FRACTIONAL SIZES	DECIMAL EQUIVALENT	PART NUMBER	SHIP QUANTITY
33/64	0.5156	95004766	1
17/32	0.5312	95005766	1
35/64	0.5468	95004767	1
9/16	0.5625	95005767	1
37/64	0.5781	95004768	1
19/32	0.5937	95005768	1
39/64	0.6093	95004769	1
5/8	0.6250	95005769	1
41/64	0.6406	95004770	1
21/32	0.6562	95005770	1
43/64	0.6718	95004771	1
11/16	0.6875	95005771	1
45/64	0.7031	95004772	1
23/32	0.7187	95005772	1
47/64	0.7343	95004773	1
3/4	0.7500	95005773	1

FRACTIONAL SIZES	DECIMAL EQUIVALENT	PART NUMBER	SHIP QUANTITY
49/64	0.7656	95004774	1
25/32	0.7812	95005774	1
51/64	0.7968	95004775	1
13/16	0.8125	95005775	1
53/64	0.8281	95004776	1
27/32	0.8437	95005776	1
55/64	0.8593	95004777	1
7/8	0.8750	95005777	1
57/64	0.8906	95004778	1
29/32	0.9062	95005778	1
59/64	0.9218	95004779	1
15/16	0.9375	95005779	1
61/64	0.9531	95004780	1
31/32	0.9687	95005780	1
63/64	0.9843	95004781	1
1	1.0000	95005781	1

SILVER & DEMING




RMT

DIAMOND TILE DRILL BIT

Diamond Edge

MADE IN USA

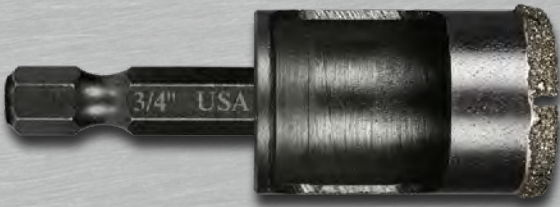

- 10x Faster than standard glass and tile drill bits
- Heat treated high-alloy steel for longer life
- Segmented cutting edge for irrigation and material evacuation
- Durable, self-sharpening diamond cutting edge
- Heavy-duty single piece construction
- Black oxide finish prevents corrosion and increases performance



MATERIAL APPLICATION

- Ceramic
- Glass
- Granite
- Marble
- Porcelain
- Slate

TOOL SIZE	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
3/16	2.165"	95001100	2
1/4	2.165"	95001101	2
5/16	2.165"	95001102	2
3/8	2.165"	95001103	2
1/2	2.165"	95001104	2

TOOL SIZE	OVERALL LENGTH	PART NUMBER	SHIP QUANTITY
5/8	2.165"	95001105	2
3/4	2.165"	95001106	2
1	2.165"	95001107	2
1-1/4	2.165"	95001115	2
1-3/8	2.165"	95001108	2

COMPARATIVE TESTING



Material: 1/2" granite slab
Hole Size: 5/8"
Power Tool: 18v power drill

- 1) Drill Style: Standard/Spade
Drill Time: 2 minutes 30 seconds
Hole: Incomplete
- 2) Drill Style: Diamond Drill Bit
Drill Time: 45 seconds
Hole: Complete

REVOLUTIONARY INNOVATION




Core ejection slot
for easy plug removal

UPTO 40 plus holes per bit
Based on tests drilling in ceramic tile with water coolant

CONSTRUCTION


DRILL APPLICATION MATRIX



Recommendations

DRILL APPLICATION MATRIX  WWW.ROCKYMOUNTAINTWIST.COM

Material	SFM Recommended	118° General Purpose	X-29 Brad Point	135° Split Point	137° BLACKGOLD™	135° Parabolic	135° Cobalt	127°-XP Cobalt
Wood	300	Green	Blue	Green	Green	Yellow	Yellow	Yellow
Plastic	300	Green	Blue	Green	Green	Yellow	Yellow	Yellow
Brass	200	Yellow	Yellow/Black	Green	Blue	Green	Green	Red
Aluminum	250	Yellow	Green/Black	Blue	Green	Green	Green	Red
Mild Steel	100	Green	Yellow/Black	Blue	Blue	Blue	Green	Green
Moderate Steel	80	Red	Red	Green	Blue	Green	Blue	Green
Tool Steel	50	Red	Red	Yellow	Green	Green	Blue	Green
Stainless Steel	40	Red	Red	Green	Red	Yellow	Red	Blue
Titanium	40	Red	Red	Green	Red	Red	Red	Blue


■ Best
 ■ Good
 ■ Ok
 ■ Not Recommended
 Thin (.06-in max)



SFM-RPM ESTIMATOR  

SFM	#40	1/8"/#30	#20	3/16"	#10	1/4"	3/8"	1/2"
250	9749	7435	5934	5096	4938	3822	2548	1911
200	7799	5948	4747	4076	3950	3057	2038	1529
150	5849	4461	3561	3057	2963	2293	1529	1146
100	3900	2974	2374	2038	1975	1529	1019	764
80	3120	2379	1899	1631	1580	1223	815	611
60	2340	1784	1424	1223	1185	917	611	459
40	1560	1190	949	815	790	611	408	306
30	1170	892	712	611	593	459	306	229
20	780	595	475	408	395	306	204	153

RPM
 34837 Innovation Drive • Ronan, MT 59864 USA • (866) 433-4RMT



TECHNICAL



DRILL FEEDS AND SPEEDS

Recommendations

MATERIALS	Recommended drill speeds in surface ft./min. for High Speed Steel Twist Drill Bits							
	15-20	20-40	40-60	60-80	80-120	120-200	200-300	300-400
Aluminum	[Bar chart showing speed range]							
Aluminum Alloys	[Bar chart showing speed range]							
Bronze (High-Tensile)	[Bar chart showing speed range]							
Die Casting (Zinc Base)	[Bar chart showing speed range]							
Cast Iron (Soft)	[Bar chart showing speed range]							
Cast Iron (Medium Hard)	[Bar chart showing speed range]							
Cast Iron (Hard Chilled)	[Bar chart showing speed range]							
Cast Iron (Malleable)	[Bar chart showing speed range]							
Hastelloy	[Bar chart showing speed range]							
Inconel	[Bar chart showing speed range]							
Magnesium	[Bar chart showing speed range]							
Magnesium Alloy	[Bar chart showing speed range]							
Monel	[Bar chart showing speed range]							
High Nickel Steel	[Bar chart showing speed range]							
Mild Steel (.2-.3 Carbon)	[Bar chart showing speed range]							
Steel (.4-.5 Carbon)	[Bar chart showing speed range]							
Tool Steel	[Bar chart showing speed range]							
Forgings	[Bar chart showing speed range]							
Steel Alloy (300-400 Brinell)	[Bar chart showing speed range]							
35-40 Rockwell C	[Bar chart showing speed range]							
40-45 Rockwell C	[Bar chart showing speed range]							
45-50 Rockwell C	[Bar chart showing speed range]							
50-55 Rockwell C	[Bar chart showing speed range]							
Stainless Steel Free Machining	[Bar chart showing speed range]							
Stainless Work Hardening	[Bar chart showing speed range]							
TI-75A	[Bar chart showing speed range]							
RS-120	[Bar chart showing speed range]							
TI-150A	[Bar chart showing speed range]							
RC-130B	[Bar chart showing speed range]							
MST6A1-4 VA	[Bar chart showing speed range]							
MST3A1-5 CR	[Bar chart showing speed range]							

TECHNICAL

Different drilling conditions make it impossible to develop a rigid rule for feeds and speeds. The following tables contain guidelines that can be utilized when drilling standard materials. Also, the following "rules of thumb" can be used to determine proper feeds and speeds for drilling ferrous materials. (Note: varying conditions can easily require adjustments)

DRILL SIZE	INCHES PER REVOLUTION	DRILL SIZE	INCHES PER REVOLUTION
.0-62	.0015	.453-500	.013
.078-125	.003	.514-.625	.016
.140-187	.004	.640-.750	.019
.203-250	.007	.765-.875	.022
.265-313	.009	.890-1.000	.024
.328-375	.011	1.015-1.250	.026
.390-437	.012	1.265-1.500	.027

RECOMMENDED FEEDS: INCHES/REVOLUTION FOR GROUND TWIST DRILL BITS

DRILLING FORMULAS	
SURFACE FEET/MIN.	Multiply RPM times drill diameter (IN) times 0.26
R.P.M.	Surface feet per minute divided by (0.26 multiplied by drill diameter)
Feed Rate In./Min	Multiply RPM times inches per revolution
These charts are intended as a guideline. Material and application can affect drill feeds and speeds.	



TERMS AND CONDITIONS

Pricing

Orders will be billed at current pricing. If you have pricing questions, please contact the RMT customer services department. Quotations are valid 30 days from the date of quote unless otherwise noted. Typographical or similar errors are subject to correction. Terms are 1% 10, net 30.

Delivery

Orders are shipped via regular ground service unless otherwise indicated. Due to size, weight or delivery requirements it may be necessary to split your order into more than one carton or ship your order via freight carrier. Rocky Mountain Twist will pay the shipping costs on orders of \$500 or more (net price) using our preferred carrier (destination within the continental U.S.). All orders are F.O.B. Rocky Mountain Twist, Ronan, Montana 59864.

Return of Merchandise

Returns are accepted for credit within 30 days of receipt of order and only when accompanied by a Returned Merchandise Agreement Number (RMA#). RMA numbers can be obtained by contacting our customer service department. All returned merchandise must be in original packaging and quantities. Custom orders, discontinued items and special tooling cannot be returned. All returns are subject to a 15% restocking fee. All return costs to be prepaid. Freight collect returns will not be accepted. Rocky Mountain Twist reserves the right to refuse return of any item that is found unsuitable for resale due to use, mishandling, or other acts following receipt of the tools by the customer.

Warranty and Limitations of Liability

Rocky Mountain Twist has attempted to provide current and accurate information herein; however, seller makes no representations regarding the accuracy or completeness of the information and assumes no liability for any loss, damage or injury of any kind which may result from or arise out of the use of or reliance on the information by any person. Rocky Mountain Twist warrants its products shall be free from defects in material and workmanship under normal use and service when correctly installed and maintained. Normal wear and tear is not covered. This warranty shall terminate thirty (30) days after delivery of the products to the buyer and shall not apply to products that have been subjected to misuse, abuse, neglect or improper storage, handling or maintenance.

Large Quantity Discounts and Blanket Orders

Rocky Mountain Twist can arrange customized discounts to suit the specific needs of your business. For large quantities and ongoing purchases, customized pricing and terms can be established. Please call (866) 433-4RMT.

NAS (National Aerospace Standard) Special Orders

Manufactured to NAS specification call outs: Type A, B, C, D, E, J and Extensions.

These orders will be manufactured under standard lead times or agreed upon lead times.

Call in reference to ordering any NAS type drills.


Foreign Customers

Our export department is set up to ship anywhere in the world, except those areas prohibited by the U.S. State Department. Payments shall be made in US Dollars via wire transfer, international money order or by credit card. Our 24 hour fax service is provided for fast and accurate communications.


ANATOMY OF A DRILL BIT

118° & 135° point

118° POINT

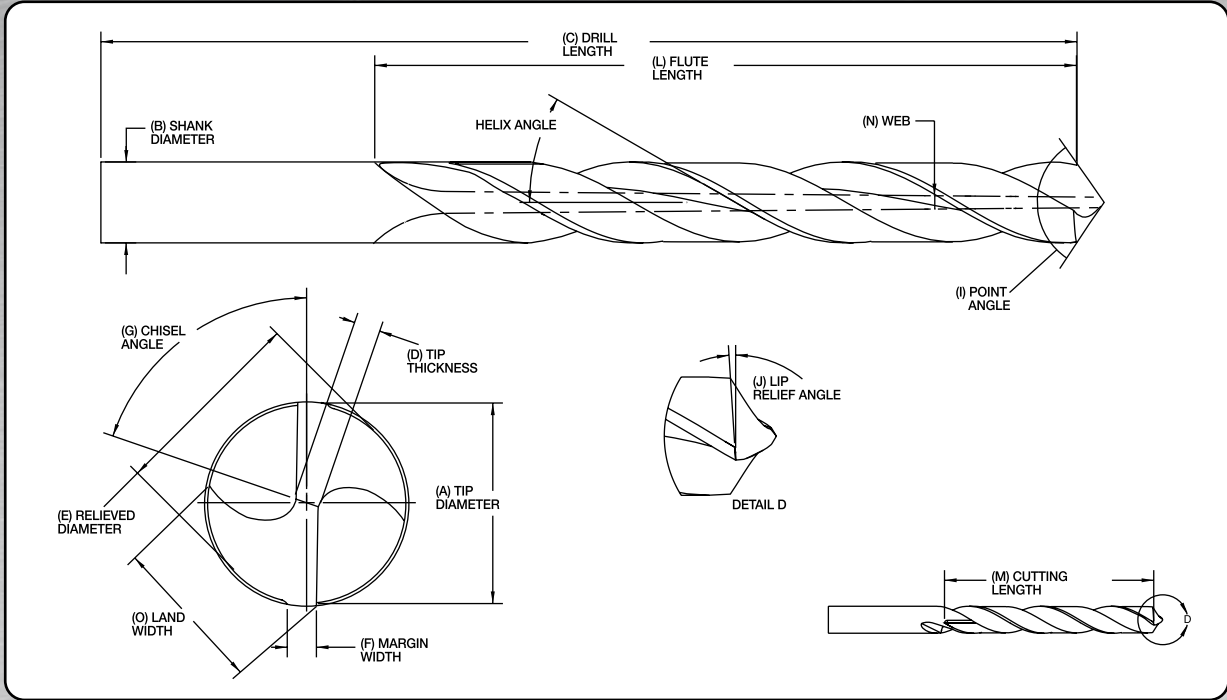

135° POINT

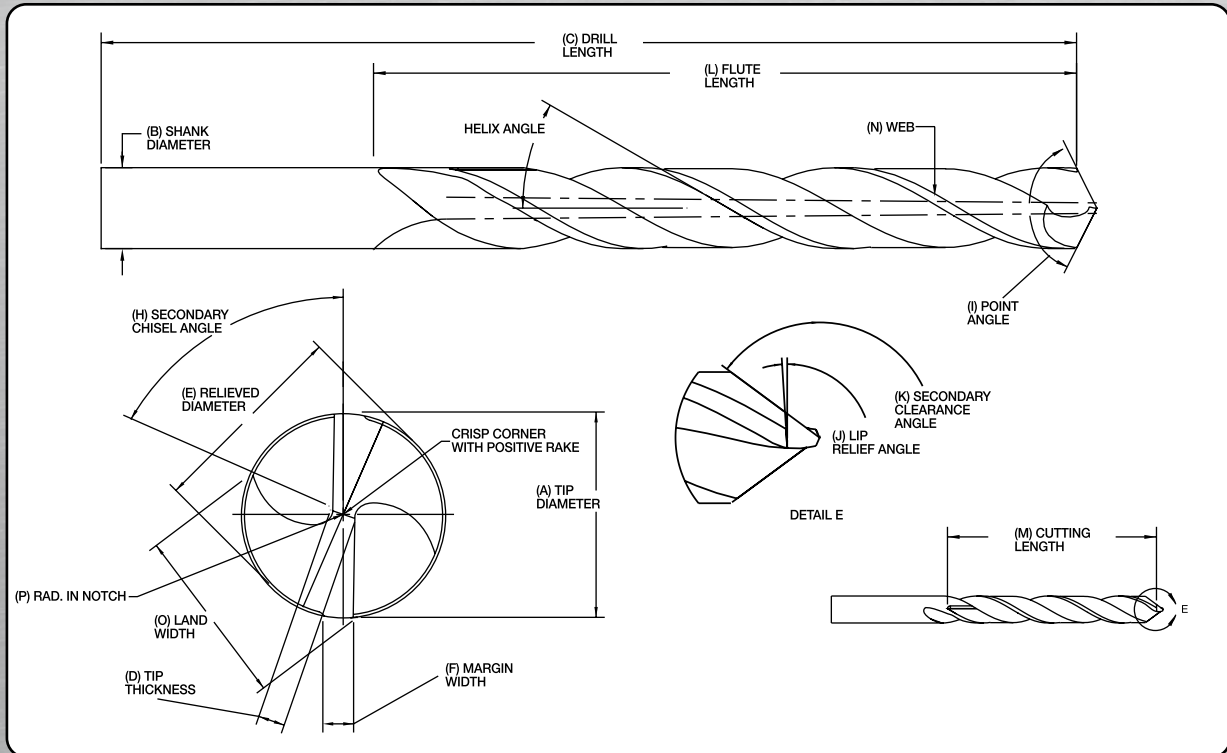

TECHNICAL



RMT

DRILL CHART DECIMAL EQUIVALENTS

DRILL SIZE	DEC.	DRILL SIZE	DEC.	DRILL SIZE	DEC.	DRILL SIZE	DEC.
0.1mm	.0039	41	.0960	15/64	.2344	33/64	.5156
0.2mm	.0079	40	.0980	6mm	.2362	17/32	.5313
0.3mm	.0118	2.5mm	.0984	B	.2380	13.5mm	.5315
80	.0135	39	.0995	C	.2420	35/64	.5469
79	.0145	38	.1015	D	.2460	14mm	.5512
1/64	.0156	37	.1040	1/4 & E	.2500	9/16	.5625
0.4mm	.0157	36	.1065	6.5mm	.2559	14.5mm	.5709
78	.0160	7/64	.1094	F	.2570	37/64	.5781
77	.0180	35	.1100	G	.2610	15mm	.5906
0.5mm	.0197	34	.1110	17/64	.2656	19/32	.5938
76	.0200	33	.1130	H	.2660	39/64	.6094
75	.0210	32	.1160	I	.2720	15.5mm	.6102
74	.0225	3mm	.1181	7mm	.2756	5/8	.6250
0.6mm	.0236	31	.1200	J	.2770	16mm	.6299
73	.0240	1/8	.1250	K	.2810	41/64	.6406
72	.0250	30	.1285	9/32	.2812	16.5mm	.6496
71	.0260	29	.1360	L	.2900	21/32	.6562
0.7mm	.0276	3.5mm	.1378	M	.2950	17mm	.6693
70	.0280	28	.1405	7.5mm	.2953	43/64	.6719
69	.0292	9/64	.1406	19/64	.2969	11/16	.6875
68	.0310	27	.1440	N	.3020	17.5mm	.6890
1/32	.0312	26	.1470	5/16	.3125	45/64	.7031
0.8mm	.0315	25	.1495	8mm	.3150	18mm	.7087
67	.0320	24	.1520	O	.3160	23/32	.7188
66	.0330	23	.1540	P	.3230	18.5mm	.7283
65	.0350	5/32	.1562	21/64	.3281	47/64	.7344
0.9mm	.0354	22	.1570	Q	.3320	19mm	.7480
64	.0360	4mm	.1575	8.5mm	.3346	3/4	.7500
63	.0370	21	.1590	R	.3390	49/64	.7656
62	.0380	20	.1610	11/32	.3438	19.5mm	.7677
61	.0390	19	.1660	S	.3480	25/32	.7812
1mm	.0394	18	.1695	9mm	.3543	20mm	.7874
60	.0400	11/64	.1719	T	.3580	51/64	.7969
59	.0410	17	.1730	23/64	.3594	20.5mm	.8071
58	.0420	16	.1770	U	.3680	13/16	.8125
57	.0430	4.5mm	.1772	9.5mm	.3740	21mm	.8268
56	.0465	15	.1800	3/8	.3750	53/64	.8281
3/64	.0469	14	.1820	V	.3770	27/32	.8438
55	.0520	13	.1850	W	.3860	21.5mm	.8465
54	.0550	3/16	.1875	25/64	.3906	55/64	.8594
1.5mm	.0591	12	.1890	10mm	.3937	22mm	.8661
53	.0595	11	.1910	X	.3970	7/8	.8750
1/16	.0625	10	.1935	Y	.4040	22.5mm	.8858
52	.0635	9	.1960	13/32	.4062	57/64	.8906
51	.0670	5mm	.1969	Z	.4130	23mm	.9055
50	.0700	8	.1990	10.5mm	.4134	29/32	.9062
49	.0730	7	.2010	27/64	.4219	59/64	.9219
48	.0760	13/64	.2031	11mm	.4331	23.5mm	.9252
5/64	.0781	6	.2040	7/16	.4375	15/16	.9375
47	.0785	5	.2055	11.5mm	.4528	24mm	.9449
2mm	.0787	4	.2090	29/64	.4531	61/64	.9531
46	.0810	3	.2130	15/32	.4688	24.5mm	.9646
45	.0820	5.5mm	.2165	12mm	.4724	31/32	.9688
44	.0860	7/32	.2188	31/64	.4844	25mm	.9843
43	.0890	2	.2210	12.5mm	.4921	63/64	.9844
42	.0935	1	.2280	1/2	.5000	1	1.000
3/32	.0938	A	.2340	13mm	.5118		



ROCKY MOUNTAIN TWIST
THE AMERICAN DRILL COMPANY



(866) 433-4768 • www.RockyMountainTwist.com
34837 Innovation Dr. • Ronan, MT 59864

