



– Inch



Design 1

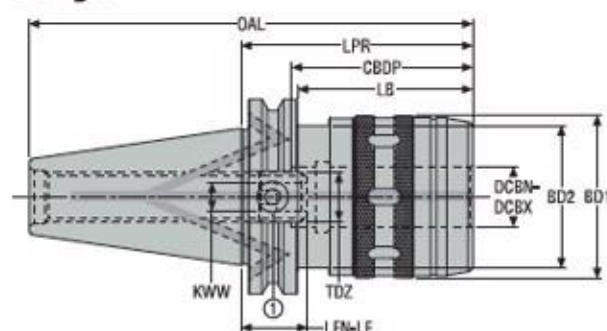

Design 2

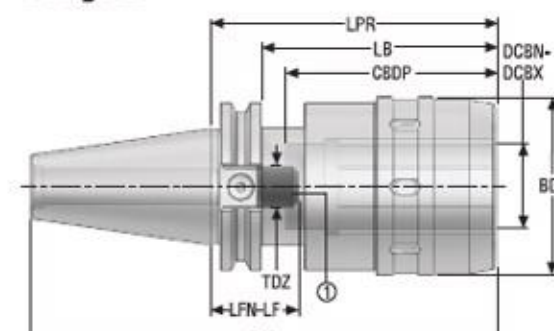

– For reduction sleeves, see page(s) 380–381
– For ‘Stop screws for through coolant’, see page(s) 382–383
– For ISO attribute explanation, see page 15

Spare parts:
1 = Stop screw

Designation	Item number	CTMS	DCBN-DCBX	OAL	LPR	LB	CBDP	BD1	BD2	LFN	LF	KWW	TDZ	Design	RFID hole	Balancing	Weight
			inch	inch	inch	inch	inch	inch	inch	inch	inch						lbs
CAT40AD-PMC0.750-3.000	10185660	CAT40 AD	0.750	5.693	3.000	2.248	2.480	1.929	1.760	0.520	0.717	8,0	UNF 5/8"-18	–	1	PB	3.090
CAT40AD-PMC1.250-4.250	10185646	CAT40 AD	1.250	6.945	4.250	3.496	3.150	2.638	1.760	1.102	1.299	8,0	UNF 5/8"	2	1	PB	5.070
CAT50ADB-PMC0.750-3.000	03211217	CAT50 ADB	0.750	7.006	3.000	1.560	2.480	1.929	2.750	0.520	0.717	8,0	UNF 5/8"	1	1	PB	7.720
CAT50ADB-PMC1.250-3.250	03211218	CAT50 ADB	1.250	7.256	3.250	2.500	3.540	2.756	2.750	0.100	0.297	8,0	UNF 5/8"	1	1	PB	8.380

Accessories


For	Spanner	Stop screw (G)	Stop screw (J)	Stop screw (K)
				
CAT40AD-PMC1.250-4.250	03BPMC32	–	–	–
CAT50ADB-PMC0.750-3.000	03BPMC20	19BPMC190506D	19BPMC190506E	–
CAT50ADB-PMC1.250-3.250	03BPMC32	19BPMC317506G	–	19BPMC317506H
-PMC0.750	03BPMC20	–	–	–

Spare Parts, included in delivery

For	Extractor for reduction sleeves	Sealing Screws	Stop screw
			
CAT40AD-PMC1.250-4.250	03EXTPMC	–	19BEPMC02
CAT50ADB-PMC0.750-3.000	03EXTPMC	950A0606	19BEPMC02
CAT50ADB-PMC1.250-3.250	03EXTPMC	950A0606	19BEPMC02
-PMC0.750	03EXTPMC	–	19BEPMC02

ISO 15488
 – Metric/ Inch

CAT / ASME B5.50-2009-ADB

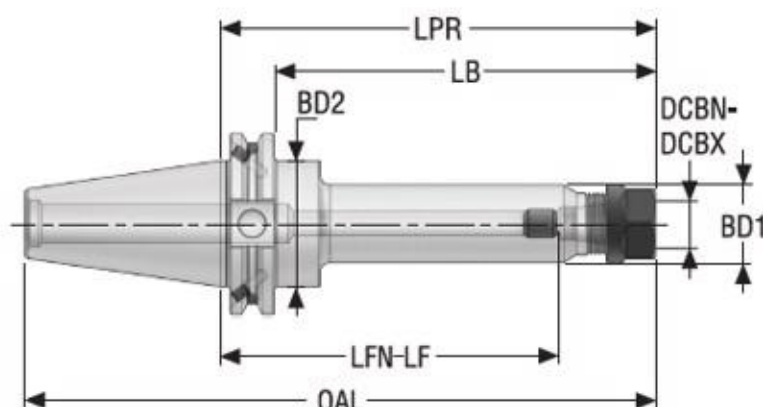

- Run-out 15 µm/ .0006" maximum at 3 x ØDCBN-DCBX
- For ER extensions and ER collets, see page(s) 357, 358, 393, 394, 395, 396
- For ER sealing rings, see page(s) 404, 405
- CAT40ADB-ER16-2.000 following ASME B5.50-2009
- For ISO attribute explanation, see page 15

Designation	Item number	CTMS	DCBN	DCBX	CTWS	LPR	BD2	BD1	OAL	LB	LFN	LF	RFID hole	Balan- cing	Weight
			mm inch	mm inch		mm inch	mm inch	mm inch	mm inch	mm inch	mm inch	mm inch			kg lbs
CAT40ADB-ER16-2.000	03201473	CAT40 ADB	0,5 0.020	10,0 0.394	ER 16	50,8 2.000	21,9 0.860	28,0 1.102	119,05 4.687	31,75 1.250	-4,2 -0.165	16,8 0.661	1	PB	1,0 2.200
CAT40ADB-ER16-4.000	03201474	CAT40 ADB	0,5 0.020	10,0 0.394	ER 16	101,6 4.000	27,6 1.087	28,0 1.102	169,85 6.687	82,55 3.250	11,6 0.457	67,6 2.661	1	PB	1,3 2.870
CAT40ADB-ER16-6.000	10229696	CAT40 ADB	0,5 0.020	10,0 0.394	ER 16	152,4 6.000	44,0 1.732	28,0 1.102	220,65 8.687	133,35 5.250	53,0 2.087	118,0 4.646	1	G6.3	1,6 3.530
CAT40ADB-ER20-2.000	10229697	CAT40 ADB	1,0 0.039	13,0 0.512	ER 20	50,8 2.000	25,0 0.984	34,0 1.339	119,05 4.687	31,75 1.250	-4,2 -0.165	10,8 0.425	1	G6.3	1,0 2.200
CAT40ADB-ER20-4.000	10229698	CAT40 ADB	1,0 0.039	13,0 0.512	ER 20	101,6 4.000	44,5 1.750	34,0 1.339	169,85 6.687	82,55 3.250	27,0 1.063	62,0 2.441	1	G6.3	1,3 2.870
CAT40ADB-ER20-6.000	10229699	CAT40 ADB	1,0 0.039	13,0 0.512	ER 20	152,4 6.000	44,5 1.750	34,0 1.339	220,65 8.687	133,35 5.250	78,0 3.071	113,0 4.449	1	G6.3	1,6 3.530
CAT40ADB-ER25-2.500	03201475	CAT40 ADB	1,0 0.039	16,0 0.630	ER 25	63,5 2.500	44,5 1.750	42,0 1.654	131,75 5.187	44,45 1.750	-11,5 -0.453	21,5 0.846	1	PB	1,1 2.430
CAT40ADB-ER25-4.000	03201476	CAT40 ADB	1,0 0.039	16,0 0.630	ER 25	101,6 4.000	41,6 1.638	42,0 1.654	169,85 6.687	82,55 3.250	1,6 0.063	59,6 2.346	1	PB	1,5 3.310
CAT40ADB-ER25-6.000	10229700	CAT40 ADB	1,0 0.039	16,0 0.630	ER 25	152,4 6.000	44,5 1.750	42,0 1.654	220,65 8.687	133,35 5.250	53,0 2.087	110,0 4.331	1	G6.3	1,9 4.190
CAT40ADB-ER32-3.000	03201477	CAT40 ADB	2,0 0.079	20,0 0.787	ER 32	76,2 3.000	44,5 1.750	50,0 1.969	144,45 5.687	57,15 2.250	-8,8 -0.346	27,2 1.071	1	PB	1,3 2.870
CAT40ADB-ER32-4.000	03201478	CAT40 ADB	2,0 0.079	20,0 0.787	ER 32	101,6 4.000	44,5 1.750	50,0 1.969	169,85 6.687	82,55 3.250	1,6 0.063	52,6 2.071	1	PB	1,3 2.870
CAT40ADB-ER32-6.000	10229701	CAT40 ADB	2,0 0.079	20,0 0.787	ER 32	152,4 6.000	44,5 1.750	50,0 1.969	220,65 8.687	133,35 5.250	50,0 1.969	103,0 4.055	1	G6.3	2,2 4.850
CAT40ADB-ER40-4.000	03201479	CAT40 ADB	3,0 0.118	26,0 1.024	ER 40	101,6 4.000	62,6 2.465	63,0 2.480	169,85 6.687	82,55 3.250	1,6 0.063	46,6 1.835	1	PB	1,8 3.970
CAT50ADB-ER16-4.000	03201480	CAT50 ADB	0,5 0.020	10,0 0.394	ER 16	101,6 4.000	27,6 1.087	28,0 1.102	203,2 8.000	82,55 3.250	1,6 0.063	61,6 2.425	1	PB	3,2 7.050
CAT50ADB-ER16-6.000	03201481	CAT50 ADB	0,5 0.020	10,0 0.394	ER 16	152,4 6.000	27,6 1.087	28,0 1.102	254,0 10.000	133,35 5.250	32,4 1.276	112,4 4.425	1	PB	3,7 8.160
CAT50ADB-ER20-4.000	10229702	CAT40 ADB	1,0 0.039	13,0 0.512	ER 20	101,6 4.000	69,9 2.750	34,0 1.339	203,2 8.000	82,55 3.250	2,0 0.079	61,0 2.402	1	G6.3	4,3 9.480
CAT50ADB-ER20-6.000	10229703	CAT50 ADB	1,0 0.039	13,0 0.512	ER 20	152,4 6.000	69,9 2.750	34,0 1.339	254,0 10.000	133,35 5.250	53,0 2.087	112,0 4.409	1	G6.3	3,6 7.940
CAT50ADB-ER25-4.000	03201482	CAT50 ADB	1,0 0.039	16,0 0.630	ER 25	101,6 4.000	41,6 1.638	42,0 1.654	203,2 8.000	82,55 3.250	1,6 0.063	59,6 2.346	1	PB	3,5 7.720
CAT50ADB-ER25-6.000	03201483	CAT50 ADB	1,0 0.039	16,0 0.630	ER 25	152,4 6.000	41,6 1.638	42,0 1.654	254,0 10.000	133,35 5.250	12,4 0.488	110,4 4.346	1	PB	3,9 8.600
CAT50ADB-ER32-4.000	03201484	CAT50 ADB	2,0 0.079	20,0 0.787	ER 32	101,6 4.000	49,6 1.953	50,0 1.969	203,2 8.000	82,55 3.250	-18,4 -0.724	50,6 1.992	1	PB	3,8 8.380
CAT50ADB-ER32-6.000	03201485	CAT50 ADB	2,0 0.079	20,0 0.787	ER 32	152,4 6.000	49,6 1.953	50,0 1.969	254,0 10.000	133,35 5.250	22,4 0.882	101,4 3.992	1	PB	4,3 9.480
CAT50ADB-ER40-4.000	03201486	CAT50 ADB	3,0 0.118	26,0 1.024	ER 40	101,6 4.000	62,6 2.465	63,0 2.480	203,2 8.000	82,55 3.250	-18,4 -0.724	46,6 1.835	1	PB	4,1 9.040

Guide

HSK-A

HSK-E

DIN

BT JIS

CAT

Combimaster

Graflex

Seco-Capto™

Others

 Operating &
 setting acces-
 sories

Shrinkfit