


## Six Flute High Performance End Mills



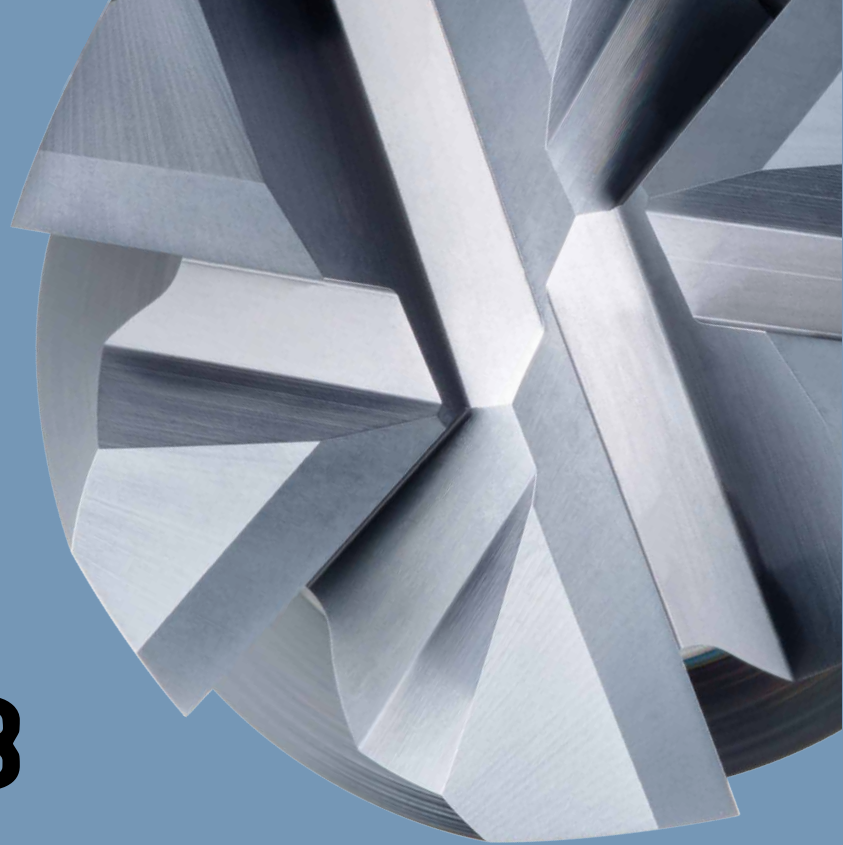

T-Carb 6-Flute High Performance End Mills are ideal for aggressive high speed machining using Trochoidal and Peel Milling techniques. The additional flutes allow higher feed rates at reduced tool loads, ultimately preventing breakage and failure. The variable pitch geometry allows the T-Carb to excel in multiple operations calling for aggressive roughing and finishing, resulting in faster cycle times and lower costs. The series is offered in a variety of length, neck and end configuration options and is coated with Ti-NAMITE-X for ultimate thermal barrier protection.

# Titanium

**T-CARB HIGH SPEED MACHINING END MILLS ARE IDEAL FOR AGGRESSIVE MILLING APPLICATIONS IN THESE TARGET MARKETS:**

- Aerospace Structural and Titanium Components
- Medical Replacement Parts and Joints
- Automotive & Motorized Vehicles
- Energy and Power Generation



## FEATURES & BENEFITS

- KSPT now offers over 140 tools in the Series 51 product offering
- Incorporates unique 6-Flute design for High Speed Machining operations requiring high accuracy and less deflection
- Designed for aggressive ramping at high speeds where evacuation and load might be a factor
- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Exceptional performance with minimal deflection in difficult materials such as titanium alloys and stainless steels
- Eccentric relief provides superior strength and smoother surface finish
- Variable Flute Geometry maximizes productivity and tool life by reducing the harmful harmonics associated with aggressive milling
- Available in a variety of corner radius and reach options
- Exclusively coated with Ti-NAMITE-X for superior wear and increased tool life




Ti-NAMITE-X provides outstanding results in a diverse range of applications including medium-hard to very hard steels (40–65 HRC) and titanium alloys. The layered design of the coating, along with the nanocomposite grain structure provides the hardness necessary for extreme wear resistance with the toughness required to withstand interrupted cutting. Ti-NAMITE-X allows for a broad spectrum of high-performance machining from aggressive material removal rates to high speed machining and finishing.

**Hardness (HV): 3600**

**Oxidation Temperature: 1150°C – 2100°F**

**Coefficient of Friction: 0.45**

**Thickness: 1 – 4 Microns (based on tool diameter)**

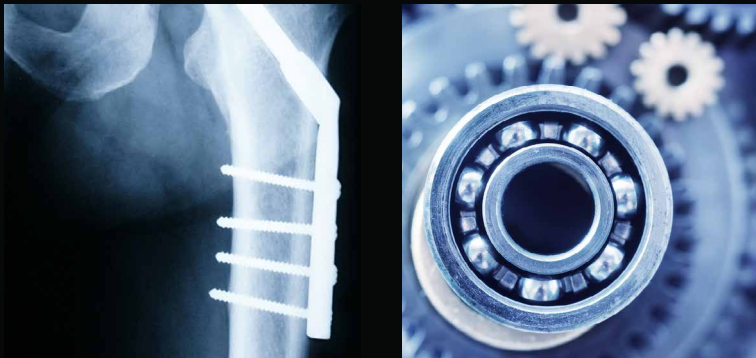

# T-CARB SERIES 51B FEATURES

## END WORK


- Strengthened tip geometry results in less tip damage versus the competition
- Specialized relief provides excellent tangency which eliminates material build-up and provides superior finish

## FLUTING & HELIX ANGLE

- Utilizes the original T-Carb design featuring a 36° helix for improved chip flow in ball endmill applications
- Unequal flute indexing for vibration-free cutting at elevated rates

## COATING

- Ti-NAMITE-X coating provides superior protection for performance and tool life

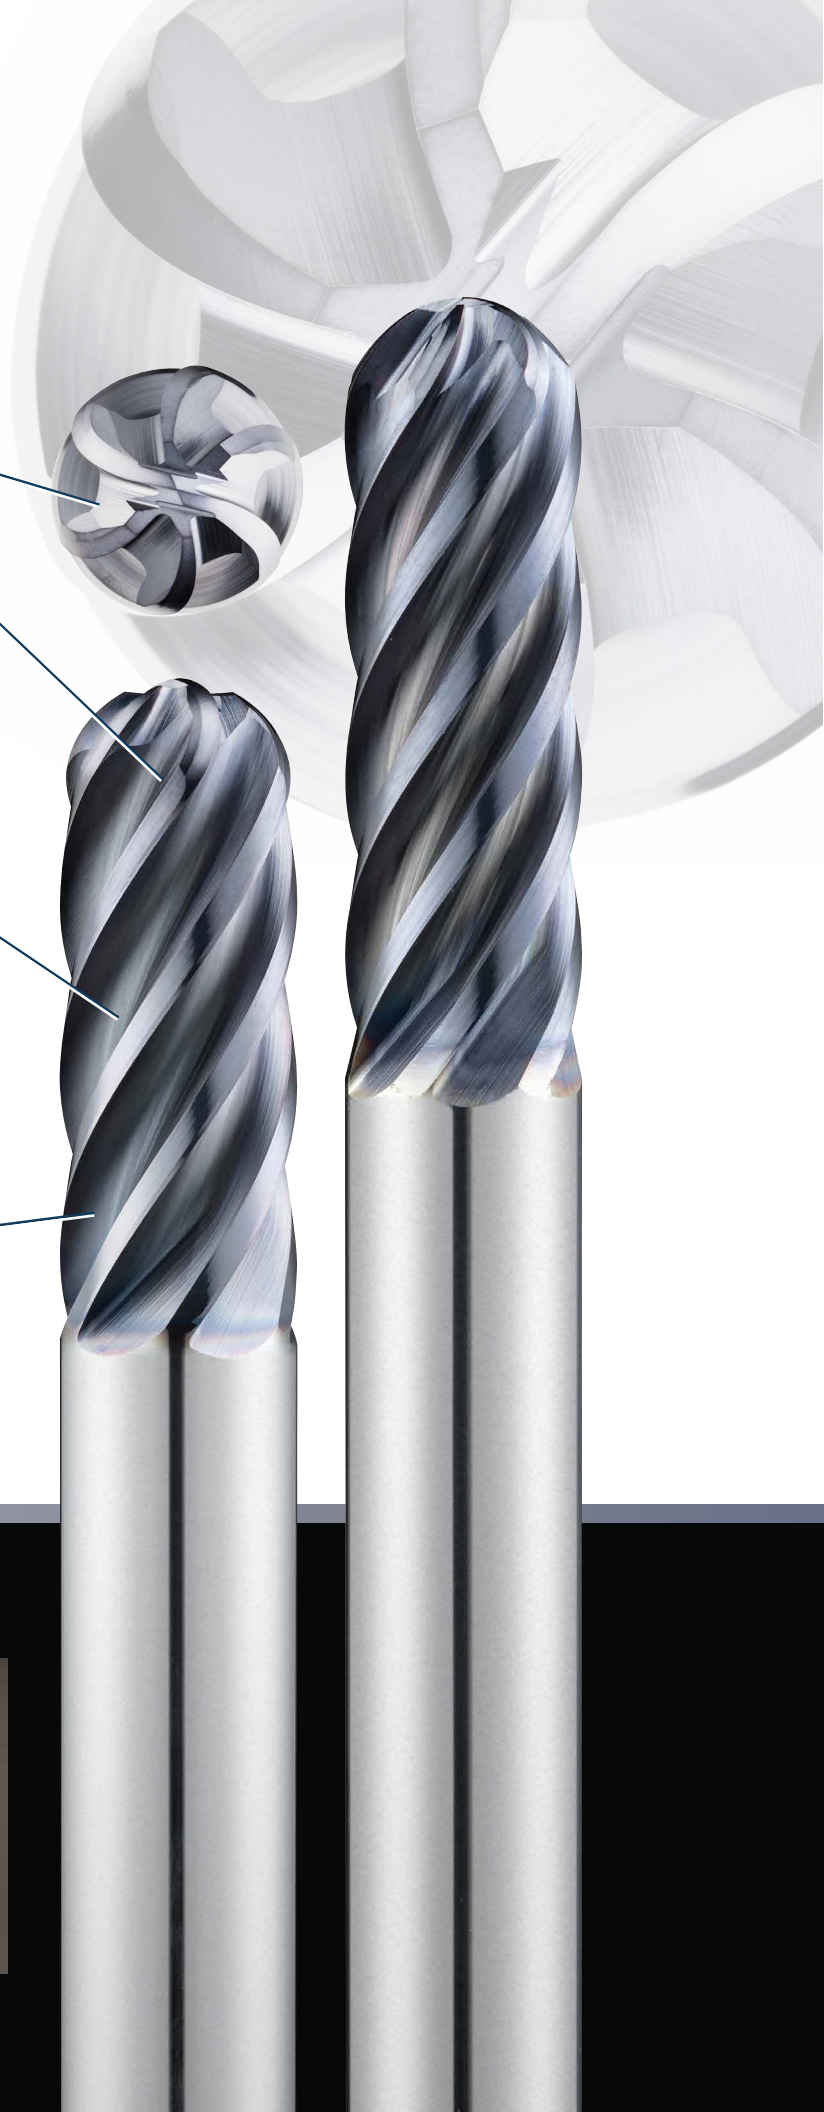

Lab results of aggressive contouring in Ti6Al4V Titanium have consistently demonstrated a 30% increase in tool life at up to 30% increased feed rates versus top competitors.

## Testing Results, 51B versus Competitors: Ti6Al4V

Tool	1375 rpm 14.8 ipm		1788 rpm 19.3 ipm		2338 rpm 31.6 ipm		2673 rpm 48.1 ipm		2855 rpm 71.0 ipm	
	Radial	Axial	Radial	Axial	Radial	Axial	Radial	Axial	Radial	Axial
Competitor A	✓	✓	✓	✓	✓	✓	✓	⊗C		
Competitor A	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Competitor B	✓	✓	✓	✓	✓	✓	✓	⊗C		
Competitor B	✓	✓	✓	✓	✓	✓	✓	⊗B		
Competitor B	✓	✓	✓	✓	✓	✓	✓	✓	✓	⊗B
T-Carb® 51B	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
T-Carb® 51B	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
T-Carb® 51B	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
T-Carb® 51B	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

C = Chipped  
B = Broke  
Radial & Axial Steps = 0.050"


Ti-NAMITE-X provides outstanding wear resistance results in a diverse range of applications in many difficult to machine materials such as titanium.



The 51B's optimum tip design has shown similar improvements in extensive testing in alloy steels and HTA such as 718 Inconel, PH stainless steels, and 316 stainless as shown below where the 51B outperformed top competitors in contouring easily completing the part with no damage.


*This is more than a 50% increase in tool life!*

COMPETITOR A

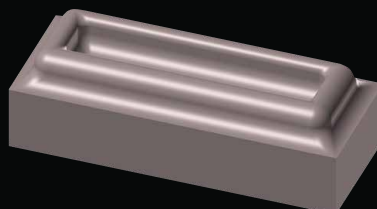

T-Carb 51B



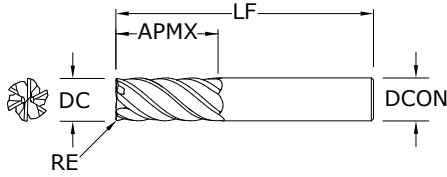


TOLERANCES (inch)		
DIAMETER	DC	DCON
1/4 - 1	+0.0000 / -0.0020	h6

CORNER RADIUS TOLERANCES (inch)
RE = +0.0000 / -0.0020

Cutting Diameter DC	Length of Cut APMX	Overall Length LF	Shank Diameter DCON	Corner Radius RE	Ti-NAMITE-X (TX)
1/4	3/4	2-1/2	1/4	-	35100
1/4	3/4	2-1/2	1/4	.015	35112
1/4	3/4	2-1/2	1/4	.030	35150
3/8	1	2-1/2	3/8	-	35101
3/8	1	2-1/2	3/8	.015	35113
3/8	1	2-1/2	3/8	.030	35114
1/2	1-1/4	3	1/2	-	35102
1/2	1-1/4	3	1/2	.015	35151
1/2	1-1/4	3	1/2	.030	35115
1/2	1-1/4	3	1/2	.060	35152
1/2	1-1/4	3	1/2	.090	35116
1/2	1-1/4	3	1/2	.120	35117
5/8	1-5/8	3-1/2	5/8	-	35103
5/8	1-5/8	3-1/2	5/8	.015	35153
5/8	1-5/8	3-1/2	5/8	.030	35118
5/8	1-5/8	3-1/2	5/8	.060	35154
5/8	1-5/8	3-1/2	5/8	.090	35119
5/8	1-5/8	3-1/2	5/8	.120	35120
5/8	1-5/8	3-1/2	5/8	.190	35155
3/4	1-5/8	4	3/4	-	35104
3/4	1-5/8	4	3/4	.030	35121
3/4	1-5/8	4	3/4	.060	35156
3/4	1-5/8	4	3/4	.090	35122
3/4	1-5/8	4	3/4	.120	35123
3/4	1-5/8	4	3/4	.190	35157
3/4	1-5/8	4	3/4	.250	35158
1	2-5/8	6	1	-	35105
1	2-5/8	6	1	.030	35124
1	2-5/8	6	1	.060	35159
1	2-5/8	6	1	.090	35125
1	2-5/8	6	1	.120	35126
1	2-5/8	6	1	.190	35160
1	2-5/8	6	1	.250	35161

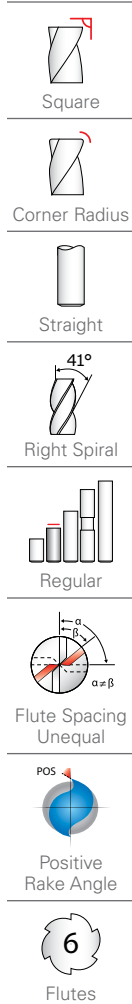


**TOLERANCES (inch)**


DIAMETER	DC	DCON
1/4 - 1	+0.0000 / -0.0020	h6

**CORNER RADIUS TOLERANCES (inch)**

RE = +0.0000 / -0.0020

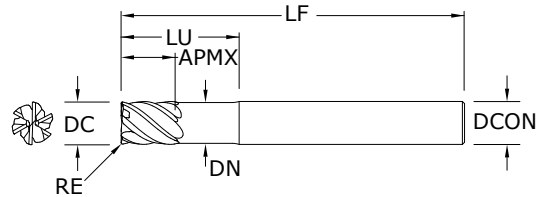

	Cutting Diameter DC	Length of Cut APMX	Overall Length LF	Shank Diameter DCON	Reach LU	Neck Diameter DN	Corner Radius RE	Ti-NAMITE-X (TX)
Square	1/4	3/8	4	1/4	1-1/8	.237	-	35106
	1/4	3/8	4	1/4	1-1/8	.237	.015	35127
Corner Radius	1/4	3/8	4	1/4	1-1/8	.237	.030	35180
	3/8	1/2	4	3/8	2-1/8	.356	-	35107
Straight	3/8	1/2	4	3/8	2-1/8	.356	.015	35128
	3/8	1/2	4	3/8	2-1/8	.356	.030	35129
41° Right Spiral	1/2	5/8	4	1/2	2-1/4	.475	-	35108
	1/2	5/8	4	1/2	2-1/4	.475	.015	35181
Long Reach	1/2	5/8	4	1/2	2-1/4	.475	.030	35130
	1/2	5/8	4	1/2	2-1/4	.475	.060	35182
Flute Spacing Unequal	1/2	5/8	4	1/2	2-1/4	.475	.090	35131
	1/2	5/8	4	1/2	2-1/4	.475	.120	35132
Positive Rake Angle	5/8	3/4	5	5/8	2-1/2	.594	-	35109
	5/8	3/4	5	5/8	2-1/2	.594	.015	35183
6 Flutes	5/8	3/4	5	5/8	2-1/2	.594	.030	35133
	5/8	3/4	5	5/8	2-1/2	.594	.060	35184
	5/8	3/4	5	5/8	2-1/2	.594	.090	35134
	5/8	3/4	5	5/8	2-1/2	.594	.120	35135
	5/8	3/4	5	5/8	2-1/2	.594	.190	35185
	3/4	1	6	3/4	3-3/8	.712	-	35110
	3/4	1	6	3/4	3-3/8	.712	.030	35136
	3/4	1	6	3/4	3-3/8	.712	.060	35186
	3/4	1	6	3/4	3-3/8	.712	.090	35137
	3/4	1	6	3/4	3-3/8	.712	.120	35138
	3/4	1	6	3/4	3-3/8	.712	.190	35187
	3/4	1	6	3/4	3-3/8	.712	.250	35188
	1	1-1/4	6	1	3-3/8	.950	-	35111
	1	1-1/4	6	1	3-3/8	.950	.030	35139
	1	1-1/4	6	1	3-3/8	.950	.060	35189
	1	1-1/4	6	1	3-3/8	.950	.090	35140
	1	1-1/4	6	1	3-3/8	.950	.120	35141
	1	1-1/4	6	1	3-3/8	.950	.190	35190
	1	1-1/4	6	1	3-3/8	.950	.250	35191

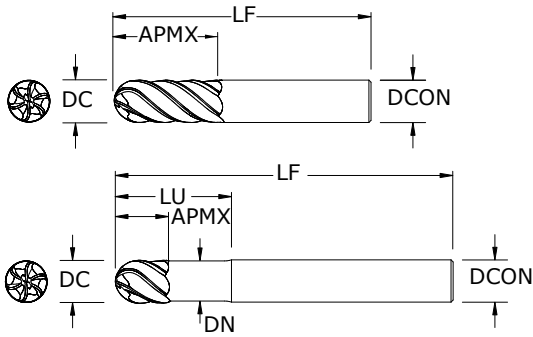

**TOLERANCES (inch)**

DIAMETER	DC	DCON
1/4 - 3/8	+0.0000 / -0.0016	h6
1/2 - 1	+0.0000 / -0.0020	h6

**CORNER RADIUS TOLERANCES (inch)**

RE = +0.0000 / -0.0010

Series 51B • 51LB Fractional

Cutting Diameter DC	Length of Cut APMX	Overall Length LF	Shank Diameter DCON	Reach LU	Neck Diameter DN	Ti-NAMITE-X (TX)
1/4	3/4	2-1/2	1/4	-	-	35220
1/4	3/8	4	1/4	1-1/8	.237	35221
3/8	1	2-1/2	3/8	-	-	35222
3/8	1/2	4	3/8	2-1/8	.356	35223
1/2	1-1/4	3	1/2	-	-	35224
1/2	5/8	4	1/2	2-1/4	.475	35225
5/8	1-5/8	3-1/2	5/8	-	-	35226
5/8	3/4	5	5/8	2-1/2	.594	35227
3/4	1-5/8	4	3/4	-	-	35228
3/4	1	6	3/4	3-3/8	.712	35229
1	2-5/8	6	1	-	-	35230
1	1-1/4	6	1	3-3/4	.950	35231

RE=1/2 Cutting Diameter (DC)

Ball

Straight

36°  
Right Spiral

Regular & Long Reach

Flute Spacing Unequal

POS  
Positive Rake Angle






6  
Flutes

**TOLERANCES (mm)**


DIAMETER	DC	DCON
6,0 - 20,0	+0,0,000 / -0,050	h6

**CORNER RADIUS TOLERANCES (inch)**

RE = +0,000 / -0,050

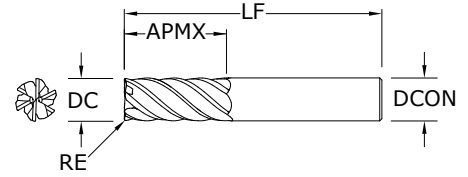

Cutting Diameter DC	Length of Cut APMX	Overall Length LF	Shank Diameter DCON	Corner Radius RE	Ti-NAMITE-X (TX)
6,0	19,0	63,0	6,0	-	45100
6,0	19,0	63,0	6,0	0,5	45112
6,0	19,0	63,0	6,0	1,0	45170
6,0	19,0	63,0	6,0	1,5	45171
8,0	20,0	63,0	8,0	-	45101
8,0	20,0	63,0	8,0	0,5	45113
8,0	20,0	63,0	8,0	1,0	45114
8,0	20,0	63,0	8,0	1,2	45150
8,0	20,0	63,0	8,0	1,5	45172
8,0	20,0	63,0	8,0	2,0	45173
10,0	22,0	75,0	10,0	-	45102
10,0	22,0	75,0	10,0	0,5	45174
10,0	22,0	75,0	10,0	1,0	45115
10,0	22,0	75,0	10,0	1,5	45116
10,0	22,0	75,0	10,0	2,0	45117
10,0	22,0	75,0	10,0	2,5	45175
12,0	26,0	83,0	12,0	-	45103
12,0	26,0	83,0	12,0	0,5	45176
12,0	26,0	83,0	12,0	0,76	45177
12,0	26,0	83,0	12,0	1,0	45118
12,0	26,0	83,0	12,0	1,5	45119
12,0	26,0	83,0	12,0	2,0	45120
12,0	26,0	83,0	12,0	2,5	45178
12,0	26,0	83,0	12,0	3,0	45179
16,0	32,0	92,0	16,0	-	45104
16,0	32,0	92,0	16,0	1,0	45121
16,0	32,0	92,0	16,0	1,5	45122
16,0	32,0	92,0	16,0	2,0	45123
16,0	32,0	92,0	16,0	2,5	45180
16,0	32,0	92,0	16,0	3,0	45181
16,0	32,0	92,0	16,0	4,0	45182
20,0	38,0	104,0	20,0	-	45105
20,0	38,0	104,0	20,0	1,0	45124
20,0	38,0	104,0	20,0	1,5	45125
20,0	38,0	104,0	20,0	2,0	45126
20,0	38,0	104,0	20,0	2,5	45183
20,0	38,0	104,0	20,0	3,0	45184
20,0	38,0	104,0	20,0	4,0	45185
20,0	38,0	104,0	20,0	5,0	45186

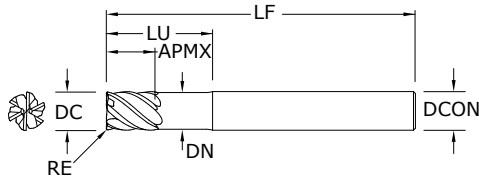







**TOLERANCES (mm)**

DIAMETER	DC	DCON
6,0 - 20,0	+0,000 / -0,050	h6

**CORNER RADIUS TOLERANCES (mm)**

RE = +0,000 / -0,050

Cutting Diameter DC	Length of Cut APMX	Overall Length LF	Shank Diameter DCON	Reach LU	Neck Diameter DN	Corner Radius RE	Ti-NAMITE-X (TX)
6,0	8,0	75,0	6,0	32,0	5,69	-	45106
6,0	8,0	75,0	6,0	32,0	5,69	0,5	45127
6,0	8,0	75,0	6,0	32,0	5,69	1,0	45187
6,0	8,0	75,0	6,0	32,0	5,69	1,5	45188
8,0	10,0	75,0	8,0	32,0	7,59	-	45107
8,0	10,0	75,0	8,0	32,0	7,59	0,5	45128
8,0	10,0	75,0	8,0	32,0	7,59	1,0	45129
8,0	10,0	75,0	8,0	32,0	7,59	1,5	45189
8,0	10,0	75,0	8,0	32,0	7,59	2,0	45190
10,0	12,0	100,0	10,0	40,0	9,50	-	45108
10,0	12,0	100,0	10,0	40,0	9,50	0,5	45191
10,0	12,0	100,0	10,0	40,0	9,50	1,0	45130
10,0	12,0	100,0	10,0	40,0	9,50	1,5	45131
10,0	12,0	100,0	10,0	40,0	9,50	2,0	45132
10,0	12,0	100,0	10,0	40,0	9,50	2,5	45192
12,0	15,0	100,0	12,0	48,0	11,38	-	45109
12,0	15,0	100,0	12,0	48,0	11,38	0,5	45193
12,0	15,0	100,0	12,0	48,0	11,38	0,76	45194
12,0	15,0	100,0	12,0	48,0	11,38	1,0	45133
12,0	15,0	100,0	12,0	48,0	11,38	1,5	45134
12,0	15,0	100,0	12,0	48,0	11,38	2,0	45135
12,0	15,0	100,0	12,0	48,0	11,38	2,5	45195
12,0	15,0	100,0	12,0	48,0	11,38	3,0	45196
16,0	20,0	115,0	16,0	65,0	15,19	-	45110
16,0	20,0	115,0	16,0	65,0	15,19	1,0	45136
16,0	20,0	115,0	16,0	65,0	15,19	1,5	45137
16,0	20,0	115,0	16,0	65,0	15,19	2,0	45138
16,0	20,0	115,0	16,0	65,0	15,19	2,5	45197
16,0	20,0	115,0	16,0	65,0	15,19	3,0	45198
16,0	20,0	115,0	16,0	65,0	15,19	4,0	45199
20,0	24,0	150,0	20,0	80,0	19,00	-	45111
20,0	24,0	150,0	20,0	80,0	19,00	1,0	45139
20,0	24,0	150,0	20,0	80,0	19,00	1,5	45140
20,0	24,0	150,0	20,0	80,0	19,00	2,0	45141
20,0	24,0	150,0	20,0	80,0	19,00	2,5	45200
20,0	24,0	150,0	20,0	80,0	19,00	3,0	45201
20,0	24,0	150,0	20,0	80,0	19,00	4,0	45202
20,0	24,0	150,0	20,0	80,0	19,00	5,0	45203




**TOLERANCES (inch)**

DIAMETER	DC	DCON
6,0 - 10,0	+0,000 / -0,040	h6
12,0 - 20,0	+0,000 / -0,050	h6





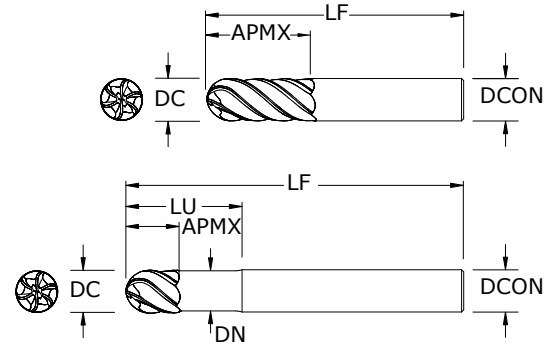


**CORNER RADIUS TOLERANCES (inch)**

RE = +0,000 / -0,025














	Cutting Diameter DC	Length of Cut APMX	Overall Length LF	Shank Diameter DCON	Reach LU	Neck Diameter DN	Ti-NAMITE-X (TX)
Ball	6,0	19,0	63,0	6,0	-	-	45204
	8,0	20,0	63,0	8,0	-	-	45206
Straight	6,0	8,0	75,0	6,0	32,0	5,68	45205
	8,0	10,0	75,0	8,0	32,0	7,58	45207
Right Spiral	10,0	22,0	75,0	10,0	-	-	45208
	10,0	12,0	100,0	10,0	40,0	9,49	45209
	12,0	26,0	83,0	12,0	-	-	45210
	12,0	15,0	100,0	12,0	48,0	11,37	45211
	16,0	32,0	92,0	16,0	-	-	45212
Regular & Long Reach	16,0	20,0	115,0	16,0	65,0	15,18	45213
	20,0	38,0	104,0	20,0	-	-	45214
	20,0	24,0	150,0	20,0	80,0	18,99	45215

RE=1/2 Cutting Diameter (DC)


-  Ball
-  Straight
-  Right Spiral
-  Regular & Long Reach
-  Flute Spacing Unequal
-  Positive Rake Angle
-  6 Flutes

Series  
51, 51CR, 51L,  
51LC, 51B, 51LB  
Fractional



	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in							
					1/4	3/8	1/2	5/8	3/4	1		
<b>P</b>	<b>CARBON STEELS</b> 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	Profile 	≤ 0.1	≤ 1	720	RPM	11002	7334	5501	4401	3667	2750
					(576-864)	Fz	0.0020	0.0035	0.0050	0.0055	0.0061	0.0071
						Feed (ipm)	132	154	165	145	134	117
		HSM 	≤ 0.05	≤ 2	915	RPM	13981	9321	6991	5592	4660	3495
					(732-1098)	Fz	0.0028	0.0053	0.0070	0.0077	0.0085	0.0100
						Feed (ipm)	235	296	294	258	238	210
	<b>ALLOY STEELS</b> 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	Profile 	≤ 0.1	≤ 1	490	RPM	7487	4991	3744	2995	2496	1872
					(392-588)	Fz	0.0015	0.0029	0.0038	0.0042	0.0046	0.0054
						Feed (ipm)	67	87	85	75	69	61
		HSM 	≤ 0.05	≤ 2	620	RPM	9474	6316	4737	3789	3158	2368
					(496-744)	Fz	0.0021	0.0039	0.0052	0.0057	0.0062	0.0073
						Feed (ipm)	119	148	148	130	117	104
<b>M</b>	<b>STAINLESS STEELS (FREE MACHINING)</b> 303, 416, 420F, 430F, 440F	Profile 	≤ 0.1	≤ 1	510	RPM	7793	5195	3896	3117	2598	1948
					(459-561)	Fz	0.0015	0.0028	0.0038	0.0041	0.0045	0.0053
						Feed (ipm)	70	87	89	77	70	62
		HSM 	≤ 0.05	≤ 2	650	RPM	9932	6621	4966	3973	3311	2483
					(585-715)	Fz	0.0021	0.0038	0.0051	0.0056	0.0061	0.0072
						Feed (ipm)	125	151	152	133	121	107
	<b>STAINLESS STEELS (DIFFICULT)</b> 304, 304L, 316, 316L	Profile 	≤ 0.1	≤ 1	350	RPM	5348	3565	2674	2139	1783	1337
					(315-385)	Fz	0.0012	0.0023	0.0030	0.0033	0.0036	0.0042
						Feed (ipm)	39	49	48	42	39	34
		HSM 	≤ 0.05	≤ 2	450	RPM	6876	4584	3438	2750	2292	1719
					(405-495)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059
						Feed (ipm)	70	88	87	76	69	61
<b>STAINLESS STEELS (PH)</b> 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	Profile 	≤ 0.1	≤ 1	325	RPM	4966	3311	2483	1986	1655	1242	
				(293-358)	Fz	0.0012	0.0023	0.0030	0.0033	0.0036	0.0042	
					Feed (ipm)	36	46	45	39	36	31	
	HSM 	≤ 0.05	≤ 2	410	RPM	6265	4177	3132	2506	2088	1566	
				(369-451)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059	
					Feed (ipm)	64	80	79	69	63	55	


continued on next page













Series	Hardness	Ae x DC	Ap x DC	Vc (sfm)		DC • in						
						1/4	3/8	1/2	5/8	3/4	1	
S	<b>SUPER ALLOYS (NICKEL, COBALT, IRON BASE)</b> Inconel 601, 617, 625, Incoloy, Monel 400 ≤ 300 Bhn or ≤ 32 HRc	Profile	≤ 0.1	≤ 1	105	RPM	1604	1070	802	642	535	401
					(84-126)	Fz	0.0014	0.0027	0.0036	0.0039	0.0043	0.0050
					Feed (ipm)	13	17	17	15	14	12	
		HSM	≤ 0.05	≤ 2	130	RPM	1986	1324	993	795	662	497
					(104-156)	Fz	0.0016	0.0036	0.0048	0.0053	0.0058	0.0067
					Feed (ipm)	19	29	29	25	23	20	
	<b>SUPER ALLOYS (NICKEL, COBALT, IRON BASE)</b> Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene ≤ 400 Bhn or ≤ 43 HRc	Profile	≤ 0.1	≤ 1	80	RPM	1222	815	611	489	407	306
					(64-96)	Fz	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034
					Feed (ipm)	7	9	9	8	7	6	
		HSM	≤ 0.05	≤ 2	100	RPM	1528	1019	764	611	509	382
					(80-120)	Fz	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047
					Feed (ipm)	12	15	16	14	13	11	
<b>TITANIUM ALLOYS</b> Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si ≤ 350 Bhn or ≤ 38 HRc	Profile	≤ 0.1	≤ 1	280	RPM	4278	2852	2139	1711	1426	1070	
				(224-336)	Fz	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034	
				Feed (ipm)	26	31	32	28	25	22		
	HSM	≤ 0.05	≤ 2	355	RPM	5424	3616	2712	2170	1808	1356	
				(284-426)	Fz	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047	
				Feed (ipm)	42	54	55	48	44	38		
<b>TITANIUM ALLOYS (DIFFICULT)</b> Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al ≤ 440 Bhn or ≤ 47 HRc	Profile	≤ 0.1	≤ 1	155	RPM	2368	1579	1184	947	789	592	
				(124-186)	Fz	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034	
				Feed (ipm)	14	17	18	15	14	12		
	HSM	≤ 0.05	≤ 2	200	RPM	3056	2037	1528	1222	1019	764	
				(160-240)	Fz	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047	
				Feed (ipm)	24	31	31	27	25	22		
H	<b>TOOL STEELS</b> A2, D2, H13, L2, M2, P20, S7, T15, W2 ≤ 375 Bhn or ≤ 40 HRc	Profile	≤ 0.1	≤ 1	240	RPM	3667	2445	1834	1467	1222	917
					(192-288)	Fz	0.0012	0.0023	0.0030	0.0034	0.0037	0.0043
					Feed (ipm)	26	34	33	30	27	24	
		HSM	≤ 0.05	≤ 2	305	RPM	4660	3107	2330	1864	1553	1165
					(244-366)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059
					Feed (ipm)	48	60	59	51	47	41	


- Note:**
- Bhn (Brinell)      HRc (Rockwell C)      HSM (High Speed Machining)
  - rpm = Vc x 3.82 / DC
  - ipm = Fz x 6 x rpm
  - reduce speed and feed for materials harder than listed
  - reduce feed and Ae when finish milling (.02 x DC maximum)
  - feed rates listed have chip thinning adjustments included where applicable
  - refer to the SGS APEX for complete technical information ([www.kyocera-sgstool.com](http://www.kyocera-sgstool.com))






Series  
51M, 51MCR,  
51ML, 51MLC,  
51MB, 51MLB  
Metric



Series	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm							
					6	8	10	12	16	20		
<b>P</b>	<b>CARBON STEELS</b> 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	Profile 	≤ 0.1	≤ 1	219	RPM	11633	8725	6980	5816	4362	3490
					(176-263)	Fz	0.048	0.081	0.101	0.121	0.142	0.158
						Feed (mm/min)	3350	4240	4230	4223	3717	3308
		HSM 	≤ 0.05	≤ 2	279	RPM	14784	11088	8870	7392	5544	4435
					(223-335)	Fz	0.066	0.113	0.141	0.169	0.197	0.220
						Feed (mm/min)	5854	7517	7504	7495	6553	5854
	<b>ALLOY STEELS</b> 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	Profile 	≤ 0.1	≤ 1	149	RPM	7917	5938	4750	3958	2969	2375
					(119-179)	Fz	0.036	0.061	0.077	0.092	0.107	0.119
						Feed (mm/min)	1710	2173	2195	2185	1906	1696
		HSM 	≤ 0.05	≤ 2	189	RPM	10017	7513	6010	5009	3756	3005
					(151-227)	Fz	0.049	0.083	0.104	0.125	0.146	0.163
						Feed (mm/min)	2945	3741	3750	3756	3291	2939
<b>M</b>	<b>STAINLESS STEELS (FREE MACHINING)</b> 303, 416, 420F, 430F, 440F	Profile 	≤ 0.1	≤ 1	155	RPM	8240	6180	4944	4120	3090	2472
					(140-171)	Fz	0.035	0.060	0.075	0.090	0.105	0.117
						Feed (mm/min)	1730	2225	2225	2225	1947	1735
		HSM 	≤ 0.05	≤ 2	198	RPM	10502	7877	6301	5251	3938	3151
					(178-218)	Fz	0.048	0.082	0.102	0.122	0.143	0.159
						Feed (mm/min)	3025	3875	3856	3844	3379	3006
	<b>STAINLESS STEELS (DIFFICULT)</b> 304, 304L, 316, 316L	Profile 	≤ 0.1	≤ 1	107	RPM	5655	4241	3393	2827	2121	1696
					(96-117)	Fz	0.029	0.049	0.061	0.073	0.086	0.096
						Feed (mm/min)	984	1247	1242	1238	1094	977
		HSM 	≤ 0.05	≤ 2	137	RPM	7271	5453	4362	3635	2726	2181
					(123-151)	Fz	0.040	0.069	0.086	0.103	0.120	0.134
						Feed (mm/min)	1745	2258	2251	2247	1963	1754
<b>STAINLESS STEELS (PH)</b> 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	Profile 	≤ 0.1	≤ 1	99	RPM	5251	3938	3151	2626	1969	1575	
				(89-109)	Fz	0.029	0.049	0.061	0.073	0.086	0.096	
					Feed (mm/min)	914	1158	1153	1150	1016	907	
	HSM 	≤ 0.05	≤ 2	125	RPM	6624	4968	3975	3312	2484	1987	
				(112-137)	Fz	0.040	0.069	0.086	0.103	0.120	0.134	
					Feed (mm/min)	1590	2057	2051	2047	1789	1598	

continued on next page



Series	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm								
					6	8	10	12	16	20			
<b>S</b>	<b>SUPER ALLOYS (NICKEL, COBALT, IRON BASE)</b> Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.1	≤ 1	32	RPM	1696	1272	1018	848	636	509
						(26-38)	Fz	0.034	0.057	0.071	0.085	0.100	0.110
							Feed (mm/min)	346	435	434	433	382	336
						40	RPM	2100	1575	1260	1050	788	630
						(32-48)	Fz	0.046	0.077	0.097	0.120	0.140	0.150
							Feed (mm/min)	580	728	733	756	662	567
	<b>SUPER ALLOYS (NICKEL, COBALT, IRON BASE)</b> Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ 0.1	≤ 1	24	RPM	1293	969	776	646	485	388
						(20-29)	Fz	0.023	0.039	0.049	0.059	0.068	0.077
							Feed (mm/min)	178	227	228	229	198	179
						30	RPM	1616	1212	969	808	606	485
						(24-37)	Fz	0.032	0.054	0.068	0.081	0.095	0.110
							Feed (mm/min)	310	393	396	393	345	320
<b>TITANIUM ALLOYS</b> Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.1	≤ 1	85	RPM	4524	3393	2714	2262	1696	1357	
					(68-102)	Fz	0.023	0.039	0.049	0.059	0.068	0.077	
						Feed (mm/min)	624	794	798	801	692	627	
					108	RPM	5736	4302	3441	2868	2151	1721	
					(87-130)	Fz	0.032	0.054	0.068	0.081	0.095	0.110	
						Feed (mm/min)	1101	1394	1404	1394	1226	1136	
<b>TITANIUM ALLOYS (DIFFICULT)</b> Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	Profile 	≤ 0.1	≤ 1	47	RPM	2504	1878	1503	1252	939	751	
					(38-57)	Fz	0.023	0.039	0.049	0.059	0.068	0.077	
						Feed (mm/min)	346	440	442	443	383	347	
					61	RPM	3231	2424	1939	1616	1212	969	
					(49-73)	Fz	0.032	0.054	0.068	0.081	0.095	0.110	
						Feed (mm/min)	620	785	791	785	691	640	
<b>H</b>	<b>TOOL STEELS</b> A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.1	≤ 1	73	RPM	3878	2908	2327	1939	1454	1163
						(59-88)	Fz	0.029	0.049	0.061	0.073	0.086	0.096
							Feed (mm/min)	675	855	852	849	750	670
						93	RPM	4928	3696	2957	2464	1848	1478
						(74-112)	Fz	0.040	0.069	0.086	0.103	0.120	0.134
							Feed (mm/min)	1183	1530	1526	1523	1331	1189

- Note:**
- Bhn (Brinell)    HRc (Rockwell C)    HSM (High Speed Machining)
  - rpm = (Vc x 1000) / (DC x 3.14)
  - mm/min = Fz x 6 x rpm
  - reduce speed and feed for materials harder than listed
  - reduce feed and Ae when finish milling (.02 x DC maximum)
  - feed rates listed have chip thinning adjustments included where applicable
  - refer to the SGS APEX for complete technical information ([www.kyocera-sgstool.com](http://www.kyocera-sgstool.com))



**KYOCERA SGS Precision Tools, Inc.**

150 Marc Drive  
Cuyahoga Falls, Ohio 44223 USA  
(330) 686-5700

[sales@kyocera-sgstool.com](mailto:sales@kyocera-sgstool.com)  
[www.kyocera-sgstool.com](http://www.kyocera-sgstool.com)