




CCR SERIES

COMMERCIAL CAN RETROFIT — INDOOR & OUTDOOR LED



QUICKLY UPGRADE RECESSED FIXTURES

ESL Vision's CCR Series is Extremely Fast to Install, Saving Time and Money on Retrofit or New Construction Projects.

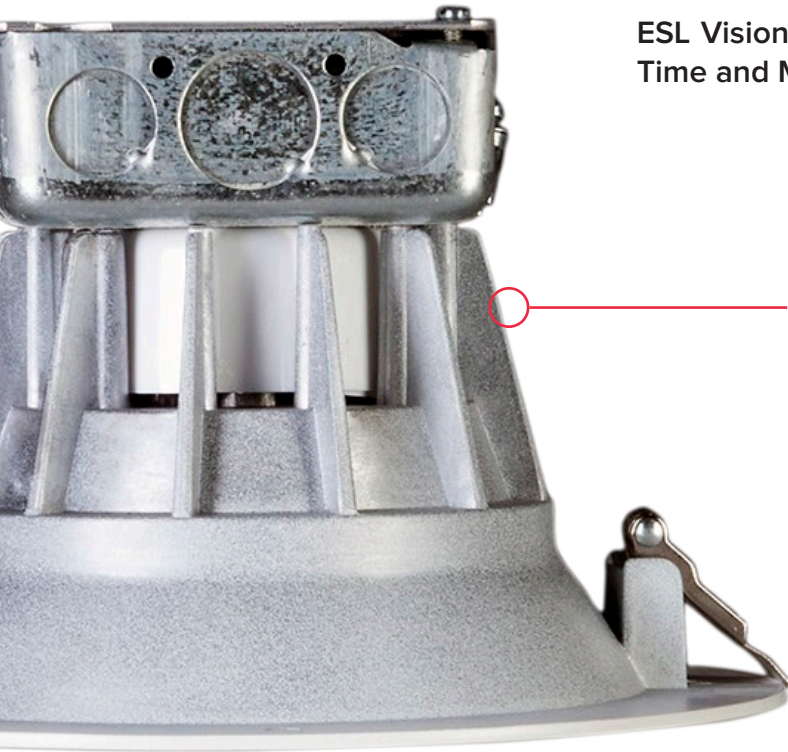**FOR VIRTUALLY ANY CAN PLACEMENT**

- Use in Both IC or Non-IC Applications
- ETL Wet Location Listed
- Energy Star Listed

**FORM & FUNCTION**

- Recessed Bevel for Optimal Light
- Stylish Round or Square Trim
- TRIAC Dimmable at 120V

MULTIPLE OPTIONS

- Emergency Backup Available
- Available in Round or Square Trim Kits
- 4" Available in 10W
- 6" Available in 10W and 15W
- 8" Available in 25W
- 3000K, 3500K, 4000K and 5000K



FAST INSTALLATION

- Integrated Junction Box
- Retrofit or New Construction
- Compatible with NM (Romex) or BX (Metallic) Wiring


SECURE MOUNTING

- Strong Spring Clips Secure Housing to Drywall, Ceiling Tiles or Downlight Mounting Plate

INSTALLATION MADE EASY

Prepare Installation Area


- Turn Off Power
- Remove Existing Can or Cut Hole in Ceiling Material
- Run Supply Lines

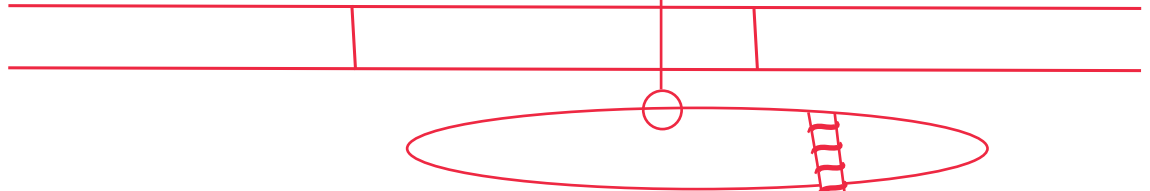**Make Electrical Connection**

- Remove J-Box Cover
- Secure Connections
- Replace Cover

**Secure Housing in Ceiling**

- Press Spring Loaded Clips Against the Housing Body
- While Holding the Clips, Push Housing Body Through Hole
- Fixture Snaps into Place Using Clips

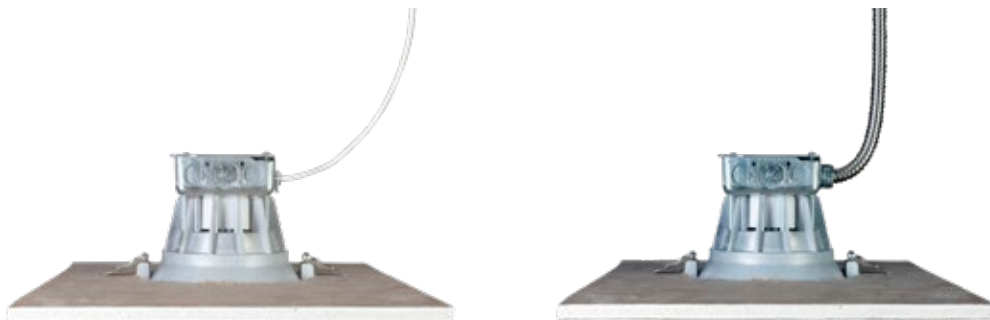COMPATIBLE WITH BX (METALLIC) OR NM (ROMEX) WIRING

ORDERING GUIDE & SPECS

Example Part Number: ESL-CCR-R4-10W-130-277

ESL	-	CCR	-	R4	-	10W	-	1	30	-	277	-	
ESL	-	TYPE	-	SIZE	-	WATTS	-	GENERATION	KELVIN	-	VOLTAGE	-	OPTIONS

OPTIONS (Add as Suffix)

EMG-AC-16W
EMG-AC-25W

External Emergency Backup for 10W & 15W CCR Fixtures
External Emergency Backup for 25W CCR Fixtures


	SERIES	PART NUMBER	SHAPE (z)	MAX lm/W	LUMENS RANGE PER LAMP	AVAILABLE VOLTAGES (277)	AVAILABLE WATTAGES (yy)	AVAILABLE KELVIN (xx)
4"	CCR	ESL-CCR-z4-10W-1xx-277	ROUND (R) SQUARE (S)	65	650	120-277 VAC (277)	10W	3000K (30) 3500K (35) 4000K (40) 5000K (50)
6"	CCR	ESL-CCR-z56-yyW-1xx-(277)	ROUND (R) SQUARE (S)	75	1,130	120 VAC 120-277 VAC (277)	10W* 15W	3000K (30) 3500K (35) 4000K (40) 5000K (50)
8"	CCR	ESL-CCR-R8-25W-1xx-10V	ROUND (R)	72	1,800	10V	25W	3000K (30) 3500K (35) 4000K (40) 5000K (50)

*10W is NOT 277 VAC




PRODUCT DIMENSIONS


4" ROUND





6" ROUND




4" SQUARE

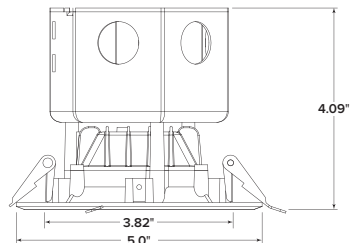

6" SQUARE

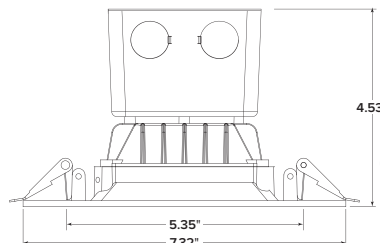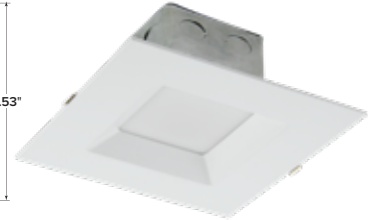

8" ROUND

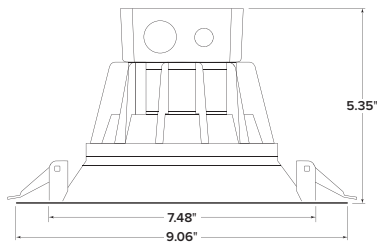

Intertek



IC RATED



OPTIONS



EMERGENCY BACKUP

EMG-AC-16W

External Emergency Backup for 10W & 15W CCR Fixtures

EMG-AC-25W

External Emergency Backup for 25W CCR Fixtures



4" ROUND or SQUARE



6" ROUND or SQUARE



8" ROUND





WWW.ESLVISION.COM
888.493.5559